

PRELIMINARY SPECIFICATIONS

AND CONSTRUCTION NOTES

PROJECT	Mattegoda Apartment Building
DOCUMENT	Architectural finishes, waterproofing, wall and structural coordination specifications
MEASUREMENT	RICS NRM 2 - Detailed Measurement for Building Works
STATUS	Preliminary - for estimating, coordination and development of consultant information

DOCUMENT STATUS NOTE. This specification is for preliminary estimating and coordination. Structural work shall not be constructed or finally measured until complete issued-for-construction structural, geotechnical and specialist consultant information has been provided.

1. General Specification Notes

- Execute the works in accordance with the contract drawings, approved shop drawings, this specification, applicable statutory requirements, manufacturer instructions and written directions of the consultants.
- Comply with applicable Sri Lankan statutory requirements and the relevant CIDA Specifications for Building Works, together with referenced SLS, BS, EN or other approved standards. Where requirements differ, obtain a written consultant direction before proceeding.
- Verify all dimensions, levels, openings, interfaces and service requirements on site. Do not scale drawings where figured dimensions are available.
- Coordinate architectural, structural, mechanical, electrical, plumbing, fire, lift, drainage and landscape requirements before fabrication or construction.
- Materials shall be new, of consistent quality, suitable for the intended exposure and obtained from approved manufacturers. Use complete compatible systems wherever products form part of a tested or warranted assembly.
- Provide all labour, materials, fixings, accessories, trims, sealants, preparation, protection, testing and making good necessary for a complete installation, whether or not every incidental item is individually shown.
- Do not substitute specified products or systems without submitting technical data, samples, warranties and evidence of equal or better performance for approval.
- Protect completed work from damage, staining, moisture and contamination. Replace damaged or defective work; patch repairs to exposed finishes are not acceptable unless approved.

1.1 Submittals and approvals

- Submit product data, certificates of conformity, safety data, colour ranges, installation instructions and maintenance information before procurement.
- Submit coordinated shop drawings for tiling layouts, movement joints, ceilings, roof and wet-area waterproofing, parapets, copings, flower troughs, drainage outlets and specialist interfaces.
- Provide representative samples of tiles, stone, paint, render texture, grout, sealant, ceiling boards, trims and roof finishes for approval.
- Construct approved mock-ups for typical toilet finishes, external render/paint, roof waterproofing termination and selected tiled junctions where directed.
- Approval of samples or shop drawings does not relieve the contractor of responsibility for dimensions, coordination, compliance, durability or completeness.

1.2 Workmanship and tolerances

- Substrates shall be clean, sound, dry as required, correctly cured, dimensionally stable and within the tolerances required by the finish manufacturer.
- Set out finishes to avoid narrow cut pieces at prominent edges. Align joints across connected surfaces where practicable and centre patterns on principal room axes.
- Form falls in screeds or designed substrates, not solely in tile adhesive. Prevent ponding at balconies, toilets, roofs, troughs and external paved areas.
- Continue structural and substrate movement joints through finishes. Provide perimeter, intermediate and isolation joints in accordance with the finish-system manufacturer's requirements.

- Use corrosion-resistant fixings externally and in wet or humid locations. Isolate dissimilar metals to prevent galvanic corrosion.

2. Schedule of Finishes

LOCATION	FLOOR	WALL	CEILING / SOFFIT
Living / dining / pantry	F01 - porcelain floor tiles; 100 mm matching skirting	W01 - plaster, skim and washable acrylic emulsion; W04 splashback to pantry	C01 - plaster/skim to RCC soffit with acrylic emulsion
Bedrooms	F01 - porcelain floor tiles; 100 mm matching skirting	W01 - plaster, skim and acrylic emulsion	C01 - plaster/skim to RCC soffit with acrylic emulsion
Toilets / bathrooms	F02 - slip-resistant porcelain/ceramic tiles to falls	W03 - ceramic/porcelain wall tiles to full height unless otherwise approved	C02 - moisture-resistant painted soffit or accessible moisture-resistant board ceiling
Apartment balconies	F03 - exterior-grade anti-slip porcelain tiles to falls	W05 - exterior render and weatherproof coating; waterproofed upstands	C03 - exterior-grade coating to exposed soffit
Common corridors	F04 - heavy-duty porcelain/homogeneous tiles and skirting	W02 - durable washable acrylic coating over plaster	C01/C04 - painted soffit or coordinated accessible suspended ceiling
Entrance and lift lobbies	F05 - premium heavy-duty porcelain/homogeneous tile finish	W02 with selected feature finish where scheduled	C04 - moisture-resistant gypsum-board ceiling or painted soffit
Stairs and landings	F06 - non-slip granite, terrazzo or heavy-duty porcelain; contrasting nosings	W02 - washable acrylic coating over plaster	C01 - painted soffit
Gymnasium	F07 - commercial resilient rubber/sports flooring	W06 - washable impact-resistant coating; mirrors where scheduled	C04/C05 - coordinated gypsum or acoustic ceiling
Condominium management room	F01 - porcelain tiles and skirting	W01 - acrylic emulsion over plaster	C01/C04 - painted soffit or board ceiling
Ground-floor parking / driveway	F08 - power-floated concrete with non-slip sealer or designed external paving	W05 - weather-resistant coating; protective coating to exposed concrete	C03 - exterior/anti-carbonation coating to exposed RCC soffit
Electrical / panel / plant rooms	F09 - dustproof epoxy coating to concrete	W07 - washable paint over render/plaster	C06 - painted exposed soffit
Lift machine room	F09 - dustproof epoxy coating	W07 - washable paint	C06 - painted exposed soffit
Roof terrace	F10 - exterior anti-slip pavers/tiles over protected insulated waterproofing	W05 - weatherproof coating; waterproofed upstands and copings	As applicable to covered areas
Water-tank room	F11 - non-slip cementitious/tiled finish over waterproofed base	W08 - waterproof cementitious coating to wet-risk surfaces	C07 - mould-resistant coating

LOCATION	FLOOR	WALL	CEILING / SOFFIT
Flower troughs	F12 - drainage/protection layer over root-resistant waterproofing	W09 - root-resistant waterproof lining internally; weatherproof exterior finish	Not applicable

3. Floor Finish Specifications

F01 - Internal porcelain tile floor

- 600 x 600 mm nominal, minimum 9 mm thick porcelain tiles or approved equivalent; colour and finish selected by the Architect.
- Lay with approved polymer-modified adhesive over a cured, levelled screed. Provide levelling compound where permitted; do not use adhesive to correct excessive substrate irregularity.
- Provide stain-resistant flexible grout and neat sealant joints at perimeters, thresholds, columns and dissimilar finishes.
- Provide matching 100 mm high tile skirting unless another skirting is scheduled. Finish exposed top edges neatly with approved trim or sealed edge.

F02 - Toilet and bathroom floor

- Slip-resistant porcelain or ceramic tiles, minimum R10 or approved equivalent for barefoot wet use.
- Lay to positive falls toward floor wastes without abrupt changes in plane, lipping or ponding.
- Provide waterproofing below the tile system in accordance with Section 8. Use compatible adhesive, grout and movement-joint sealant.
- Form threshold/upstand details to prevent water migration into adjoining rooms while maintaining accessibility requirements.

F03 - Balcony floor

- UV- and weather-resistant anti-slip porcelain tiles suitable for exterior exposure.
- Lay to designed falls over a waterproofed screed. Provide drips, thresholds, upstands and outlet junctions as detailed.
- Use exterior-grade flexible adhesive and grout. Provide sealant movement joints at perimeters and at system-recommended intervals.

F04/F05 - Common-area tile floors

- Heavy-duty homogeneous or porcelain tiles suitable for high pedestrian traffic, trolleys and routine commercial cleaning.
- Select slip resistance appropriate to whether the location is internal dry, entrance transition or potentially wet.
- Provide movement joints, thresholds, edge trims and access-panel coordination. Maintain flush transitions where accessibility routes require them.

F06 - Stair and landing finish

- Non-slip granite, terrazzo or heavy-duty porcelain treads and risers as selected.
- Provide continuous contrasting proprietary nosing or formed non-slip edge. Keep tread dimensions uniform and coordinate finish thickness with structural risers.
- Provide matching skirtings/stringer finish and neatly finish junctions with balustrade posts.

F07 - Gymnasium floor

- Commercial-grade resilient rubber or sports flooring of thickness recommended for the intended equipment and impact loading.
- Provide smooth, dry and level substrate, compatible primer/adhesive and sealed joints. Use equipment isolation pads where required.

F08 - Parking and driveway

- Power-floated, abrasion-resistant concrete finish with non-slip clear or pigmented sealer, or designed heavy-duty paving to external areas.
- Provide falls to drains, movement/construction joints, wheel-stop fixings and line marking. Repair cracks only using approved structural/repair systems.
- Use a finish resistant to fuel, oil, tyre marking, cleaning chemicals and tropical weather exposure as applicable.

F09 - Plant and service-room floor

- Prepare concrete mechanically and apply a compatible dustproof epoxy coating system, including primer and minimum two finishing coats.
- Provide slip-resistant aggregate where water, oil or maintenance activity may create a slipping risk. Turn coating up at skirtings where scheduled.

4. Wall Finish Specifications**W01/W02 - Internal plaster and paint**

- Provide cement-sand plaster, nominally 12-15 mm thick, in the number of coats necessary to achieve a true, smooth and stable surface.
- Apply compatible alkali-resistant primer, approved skim coat where required and minimum two coats of low-VOC acrylic emulsion.
- Use washable, mould-resistant paint in kitchens, corridors and other high-contact or humid locations.
- Reinforce plaster across masonry/RCC junctions with alkali-resistant mesh. Do not bridge designed movement joints.

W03 - Toilet wall tiling

- Glazed ceramic or porcelain tiles to full height unless the Architect approves a lower stated height.
- Prepare walls plumb and true. Apply waterproofing within shower and splash zones and at all wet-area penetrations.

- Set out joints to align with fittings and sanitaryware. Use proprietary trims to exposed edges and flexible sealant at internal corners and changes of plane.
- Use mould-resistant grout and sanitary-grade fungicidal sealant.

W04 - Pantry splashback

- Glazed ceramic/porcelain tiles or approved impervious panel finish, minimum 600 mm high above worktops and extending behind sinks and cooking positions.
- Use stain-resistant grout and sanitary-grade sealant at worktop junctions, penetrations and fittings.

W05 - External render and coating

- Provide weather-resistant cementitious render system, nominally 15-20 mm total thickness, compatible with the masonry or concrete substrate.
- Provide mesh reinforcement at dissimilar-material junctions, around openings and at crack-prone locations. Form movement joints as detailed.
- Apply compatible exterior primer and minimum two finishing coats of high-build weatherproof elastomeric/acrylic coating resistant to UV, driving rain, mould and algae.

W06 - Gymnasium walls

- Provide washable impact-resistant acrylic coating over prepared plaster. Fix mirrors with a proprietary safety-backed system and concealed mechanical restraint where required.

W07/W08 - Plant and wet-risk walls

- Use washable, mould-resistant coating over render/plaster in service rooms.
- At water-tank and wet-risk locations, provide a compatible cementitious waterproof coating or tanking system, including fillets, penetrations and junction reinforcement.

W09 - Flower trough lining

- Provide a continuous root-resistant waterproofing system to the base and sides, including reinforced corners, outlets and overflow penetrations.
- Protect the membrane with drainage/protection board and geotextile before placing drainage medium and soil.

5. Ceiling and Soffit Specifications

C01 - Painted RCC soffit

- Remove fins, laitance, release agents and loose material. Repair surface defects with an approved polymer-modified repair material.
- Apply compatible primer, skim coat where required and minimum two coats of acrylic emulsion to achieve a uniform finish.

C02 - Moisture-resistant wet-area ceiling

- Where a suspended ceiling is required, provide moisture-resistant gypsum board or cementitious board on a corrosion-resistant proprietary framing system.
- Use moisture- and mould-resistant jointing and paint systems. Provide removable access panels for concealed valves, traps and equipment.

C03 - External soffit coating

- Prepare exposed concrete and apply exterior-grade, anti-carbonation or elastomeric coating compatible with the exposure and substrate moisture.

C04/C05 - Suspended and acoustic ceilings

- Provide proprietary galvanized suspension/framing, boards or acoustic tiles, perimeter trims, movement joints and access panels as a complete coordinated system.
- Coordinate levels, lighting, detectors, sprinklers, diffusers, speakers and access requirements before installation.
- Use fire-, moisture- and acoustic-performance classifications appropriate to the location and required assembly.

C06/C07 - Service-room ceilings

- Prepare and paint exposed soffits with washable acrylic or mould-resistant coating appropriate to the room environment.

6. Masonry and Wall Construction Notes

6.1 Wall types

REF.	WALL	PRELIMINARY REQUIREMENT
M01	External masonry	Nominal 225 mm clay brick or approved block masonry, subject to structural, fire, acoustic and thermal confirmation.
M02	Apartment-separating / corridor wall	Nominal 200/225 mm masonry or approved tested system; full height from structural slab to structural soffit; fire and acoustic performance to be confirmed.
M03	Internal apartment partition	Nominal 100/115 mm brick or block masonry unless otherwise dimensioned; non-load-bearing.
M04	Wet-area partition	Nominal 100/115 mm masonry or approved moisture-resistant system; support sanitary fittings and waterproofing system.
M05	Lift, stair and service-shaft wall	Construction only as confirmed by structural and fire consultants; may be RCC shear/core wall or a tested non-structural fire-rated assembly.
M06	Parapet / guard wall	Masonry or RCC only as structurally detailed, including waterproofed base, coping, reinforcement, movement joints and guard-loading requirements.

6.2 Masonry workmanship

- Use approved masonry units of uniform dimensions and adequate strength for the stated location. Store clear of the ground and protect from saturation and contamination.
- Use mortar compatible with the masonry units and exposure. Do not use excessively strong mortar likely to promote cracking unless specifically designed.
- Build masonry plumb, level and true with fully filled bed and perpendicular joints. Rake joints where required to receive plaster.
- Anchor non-load-bearing masonry to RCC columns, beams and slabs with approved galvanized/stainless-steel ties or proprietary anchors while permitting required differential movement.
- Provide reinforced-concrete or approved structural lintels over every opening. Bearing, depth and reinforcement shall follow structural details.
- Provide damp-proof courses, flashings, cavity trays, weep holes and moisture barriers at external and ground-contact locations as detailed.
- Provide crack-control reinforcement and movement joints at consultant-determined locations, including long wall runs, changes in height/thickness, openings and structural interfaces.
- Form service chases only where approved. Do not reduce required fire, acoustic or structural performance.
- Seal wall heads, perimeters and penetrations to maintain required fire, smoke, acoustic, moisture and pest-control performance.

7. Structural Coordination and Mandatory Notes

MANDATORY STRUCTURAL NOTE. No masonry wall shall be treated as load-bearing or structural unless expressly identified on the structural engineer's issued-for-construction drawings. Walls shown only on architectural drawings shall be regarded as non-load-bearing partitions or infill walls.

- The structural system, including all RCC slabs, beams, columns, transfer members, shear/core walls, stairs and foundations, shall be designed and detailed by a qualified structural engineer.
- Do not infer member sizes, concrete grades, reinforcement, cover, laps, anchorage, footing sizes or bearing capacities from the architectural drawings or generic details.
- Provide complete structural framing plans and coordinated beam, column, slab, shear-wall and foundation schedules before construction or final BOQ measurement.
- Confirm the lateral-load-resisting system, particularly at the open ground-floor parking level. The structural design shall address any soft-storey, torsion, drift and robustness requirements.
- Identify all transfer beams, slab strips or other supports required below upper-storey walls that do not continue to foundations.
- Confirm whether lift and staircase walls are reinforced-concrete shear/core walls or non-structural fire-rated walls. Do not substitute masonry for designed RCC walls.
- Do not cut, chase, drill, core or form openings in RCC slabs, beams, columns, walls or foundations without written structural approval.
- Do not build masonry directly over a slab unless the slab or supporting member has been designed for the wall load and the wall location is shown on coordinated structural drawings.
- Provide slip/compressible head joints below beams or slabs where required for non-load-bearing masonry. Do not rigidly wedge partitions against deflecting structural members unless detailed.
- Coordinate construction joints, movement joints, waterstops, cast-in items, sleeves, openings, façade anchors, balustrades and service penetrations with structural drawings before placing concrete.

- Design water-tank supports, lift equipment supports, gymnasium loads, roof-terrace loads, flower troughs and maintenance loads as specifically identified imposed and permanent loads.
- Foundation design shall be based on an adequate geotechnical investigation and confirmed allowable bearing parameters. Generic footing details shall not be used as a foundation schedule.
- Provide temporary works, propping, back-propping and construction sequencing designed for the actual loads and structural arrangement.

7.1 Structural information required before final measurement

- Design basis, applicable codes, durability/exposure requirements and fire resistance periods.
- Geotechnical report, groundwater information and design bearing parameters.
- Foundation, ground-beam, pile or pad-footing layouts and schedules as applicable.
- Framing plans for every level, including transfer structures and opening trimmers.
- Beam, column, slab, wall, stair and reinforcement schedules.
- Lift pit, water tank, lift machine room, parapet, flower trough and roof structure details.
- Concrete grades, reinforcement grades, cover, bar marks, laps, couplers and joint details.
- Coordinated builder's-work openings and cast-in service items.

8. Waterproofing and Roof Specifications

8.1 Roof terrace system

- Provide a complete warranted roof system over the structurally designed RCC slab. The final build-up shall be submitted by an approved specialist and coordinated with thresholds, parapets, drains, planters and movement joints.
- Prepare the slab by removing laitance and contaminants and repairing cracks, honeycombing and irregularities with approved compatible materials.
- Provide screed to positive falls, generally not flatter than 1:80 at finished surfaces unless hydraulic design requires steeper falls. Prevent backfall and ponding.
- Apply compatible primer and a two-layer modified-bituminous membrane or approved reinforced liquid-applied waterproofing system suitable for tropical UV and rainfall exposure.
- Turn waterproofing up walls, kerbs and penetrations a minimum of 300 mm where geometry permits; terminate with approved chases, bars, flashings or proprietary details.
- Provide puddle flanges, clamping rings or proprietary compatible outlet details. Provide accessible strainers and overflow paths.
- Provide protection board or protective screed, high-density rigid roof insulation suitable for the selected roof build-up, separation/drainage layers and reinforced protective screed or pedestal system as required.
- Provide UV-resistant anti-slip exterior tiles or pavers, with compatible adhesives/grout or proprietary supports. Continue movement joints through the finish.
- Flood-test the completed waterproofing for at least 48 hours, or longer where the specialist system requires, before concealment. Record results and rectify leaks before proceeding.

8.2 Toilets and wet areas

- Provide a proprietary cementitious or reinforced liquid waterproofing system compatible with the substrate, adhesive and tile finish.

- Turn waterproofing up walls a minimum of 300 mm generally and to full height within shower zones. Reinforce corners, junctions, cracks and changes of material.
- Use proprietary collars or reinforced detailing at pipes, floor wastes and penetrations. Seal thresholds to prevent migration into dry rooms.
- Flood-test before tiling and retain written inspection records.

8.3 Balconies, flower troughs and exposed features

- Waterproof balconies independently of internal floor finishes, including thresholds, outlets, upstands and drip details.
- Use root-resistant waterproofing to flower troughs. Provide protection board, drainage layer, filter geotextile, designed outlets and emergency overflows.
- Provide metal copings or waterproofed precast/cast-in-situ copings to parapets and guard walls, laid to fall with projecting drips on exposed edges.
- Seal railing, louvre, canopy and façade-fixing penetrations with coordinated proprietary details; surface sealant alone is not an acceptable primary waterproofing detail.

9. Painting, Sealants and Associated Finishes

9.1 Painting

- Use complete paint systems from one approved manufacturer, including surface preparation, primers, fillers, undercoats and finishing coats.
- Do not paint damp, uncured, dusty, friable or contaminated substrates. Test moisture and alkalinity where required by the manufacturer.
- Provide uniform colour, sheen and coverage without runs, brush marks, flashing, pinholes or visible substrate defects.
- Use exterior coatings resistant to UV, driving rain, mould, algae and carbonation as appropriate. Use mould-resistant coatings in humid internal locations.
- Prepare and prime ferrous and non-ferrous metals using systems compatible with the metal, environment and finishing coat.

9.2 Sealants and joints

- Use primers, backer rods, bond breakers and elastomeric sealants compatible with adjoining substrates and expected joint movement.
- Provide sanitary-grade fungicidal sealant at sanitary fittings, wet-area corners, worktops and splashbacks.
- Provide UV-resistant exterior sealants to façade, coping, threshold and external movement-joint locations.
- Do not use sealant to conceal incorrectly sized gaps, defective workmanship or missing flashings/waterproofing.

10. Testing, Protection and Handover

- Inspect substrates and concealed work before applying finishes. Obtain hold-point approval where work will be covered.

- Carry out wet-area, balcony, roof and trough waterproofing tests before protection or tiling. Repeat testing after repairs.
- Conduct adhesion, moisture, slip-resistance, coating-thickness or other performance tests where specified or reasonably required for verification.
- Protect finished surfaces throughout the remaining works. Use non-staining protection materials and prohibit damaging traffic or storage.
- Clean completed work using manufacturer-approved methods. Replace cracked, chipped, stained, drummy, uneven or otherwise defective finishes.
- Provide warranties, test records, approved product data, colour schedules, maintenance instructions, spare tiles/materials and as-built details at handover.

11. NRM 2 Measurement Notes

Measure the work in accordance with RICS NRM 2 - Detailed Measurement for Building Works. These notes supplement, but do not replace, the applicable NRM 2 rules and project BOQ preambles.

WORK SECTION	MEASUREMENT NOTE
In-situ concrete	Measure by volume and separate by element, concrete specification and relevant NRM 2 classification.
Reinforcement	Measure by weight and separate by type/grade and relevant classification. Do not quantify final reinforcement without engineer-issued information.
Formwork	Measure contact area and separate by element, profile, finish and relevant classification.
Masonry	Measure walling by area and separate by unit, thickness, mortar, location and performance. Measure lintels, DPCs, reinforcement and associated features separately where required.
Floor finishes	Measure by area and distinguish finish, substrate/backing, bedding/fixing, location and performance. Measure skirtings, trims and movement joints separately as applicable.
Wall finishes	Measure by area and distinguish substrate, preparation, finish system, internal/external location and wet-area requirements.
Ceiling finishes	Measure by area, separating direct-to-soffit finishes from suspended systems and distinguishing type, height and performance.
Waterproofing	Measure by area and separate roofs, floors, walls, tanking, upstands and protection. Measure outlets, flashings and proprietary features separately where applicable.
Roof finishes	Measure by area and separate finish/build-up types. Measure copings, flashings, trims, gutters and outlets separately as required.
Painting	Measure by area and distinguish substrate, internal/external exposure and coating system.
Doors/windows	Enumerate by type and opening size in coordination with the architectural schedule; separately describe glazing, ironmongery, fire/acoustic ratings and finishes as required.


11.1 Description requirements

- State location, substrate, material, size/thickness where relevant, fixing/bedding method and surface treatment.

- Distinguish internal, external, wet-area, slip-resistant, fire-rated, acoustic, heavy-duty and exposed conditions.
- Separate differing wall thicknesses, floor levels, ceiling heights, roof build-ups and finish types.
- Identify assumptions and provisional quantities arising from missing structural or specialist information.
- Do not describe masonry as structural or load-bearing unless confirmed on issued structural drawings.
- Reconcile the final BOQ with coordinated architectural, structural and services drawings before tender or construction issue.

12. Reference and Coordination Notes

- RICS NRM 2 - Detailed Measurement for Building Works.
- CIDA Specifications for Building Works, Volumes I and II, where incorporated into the contract.
- Applicable Sri Lanka Standards and accepted BS/EN standards identified by the project consultants.
- Applicable planning, building, fire, accessibility, health, environmental and local-authority requirements.
- Manufacturer requirements for proprietary tiles, adhesives, grouts, waterproofing, roofing, ceilings, coatings, sealants and specialist systems.

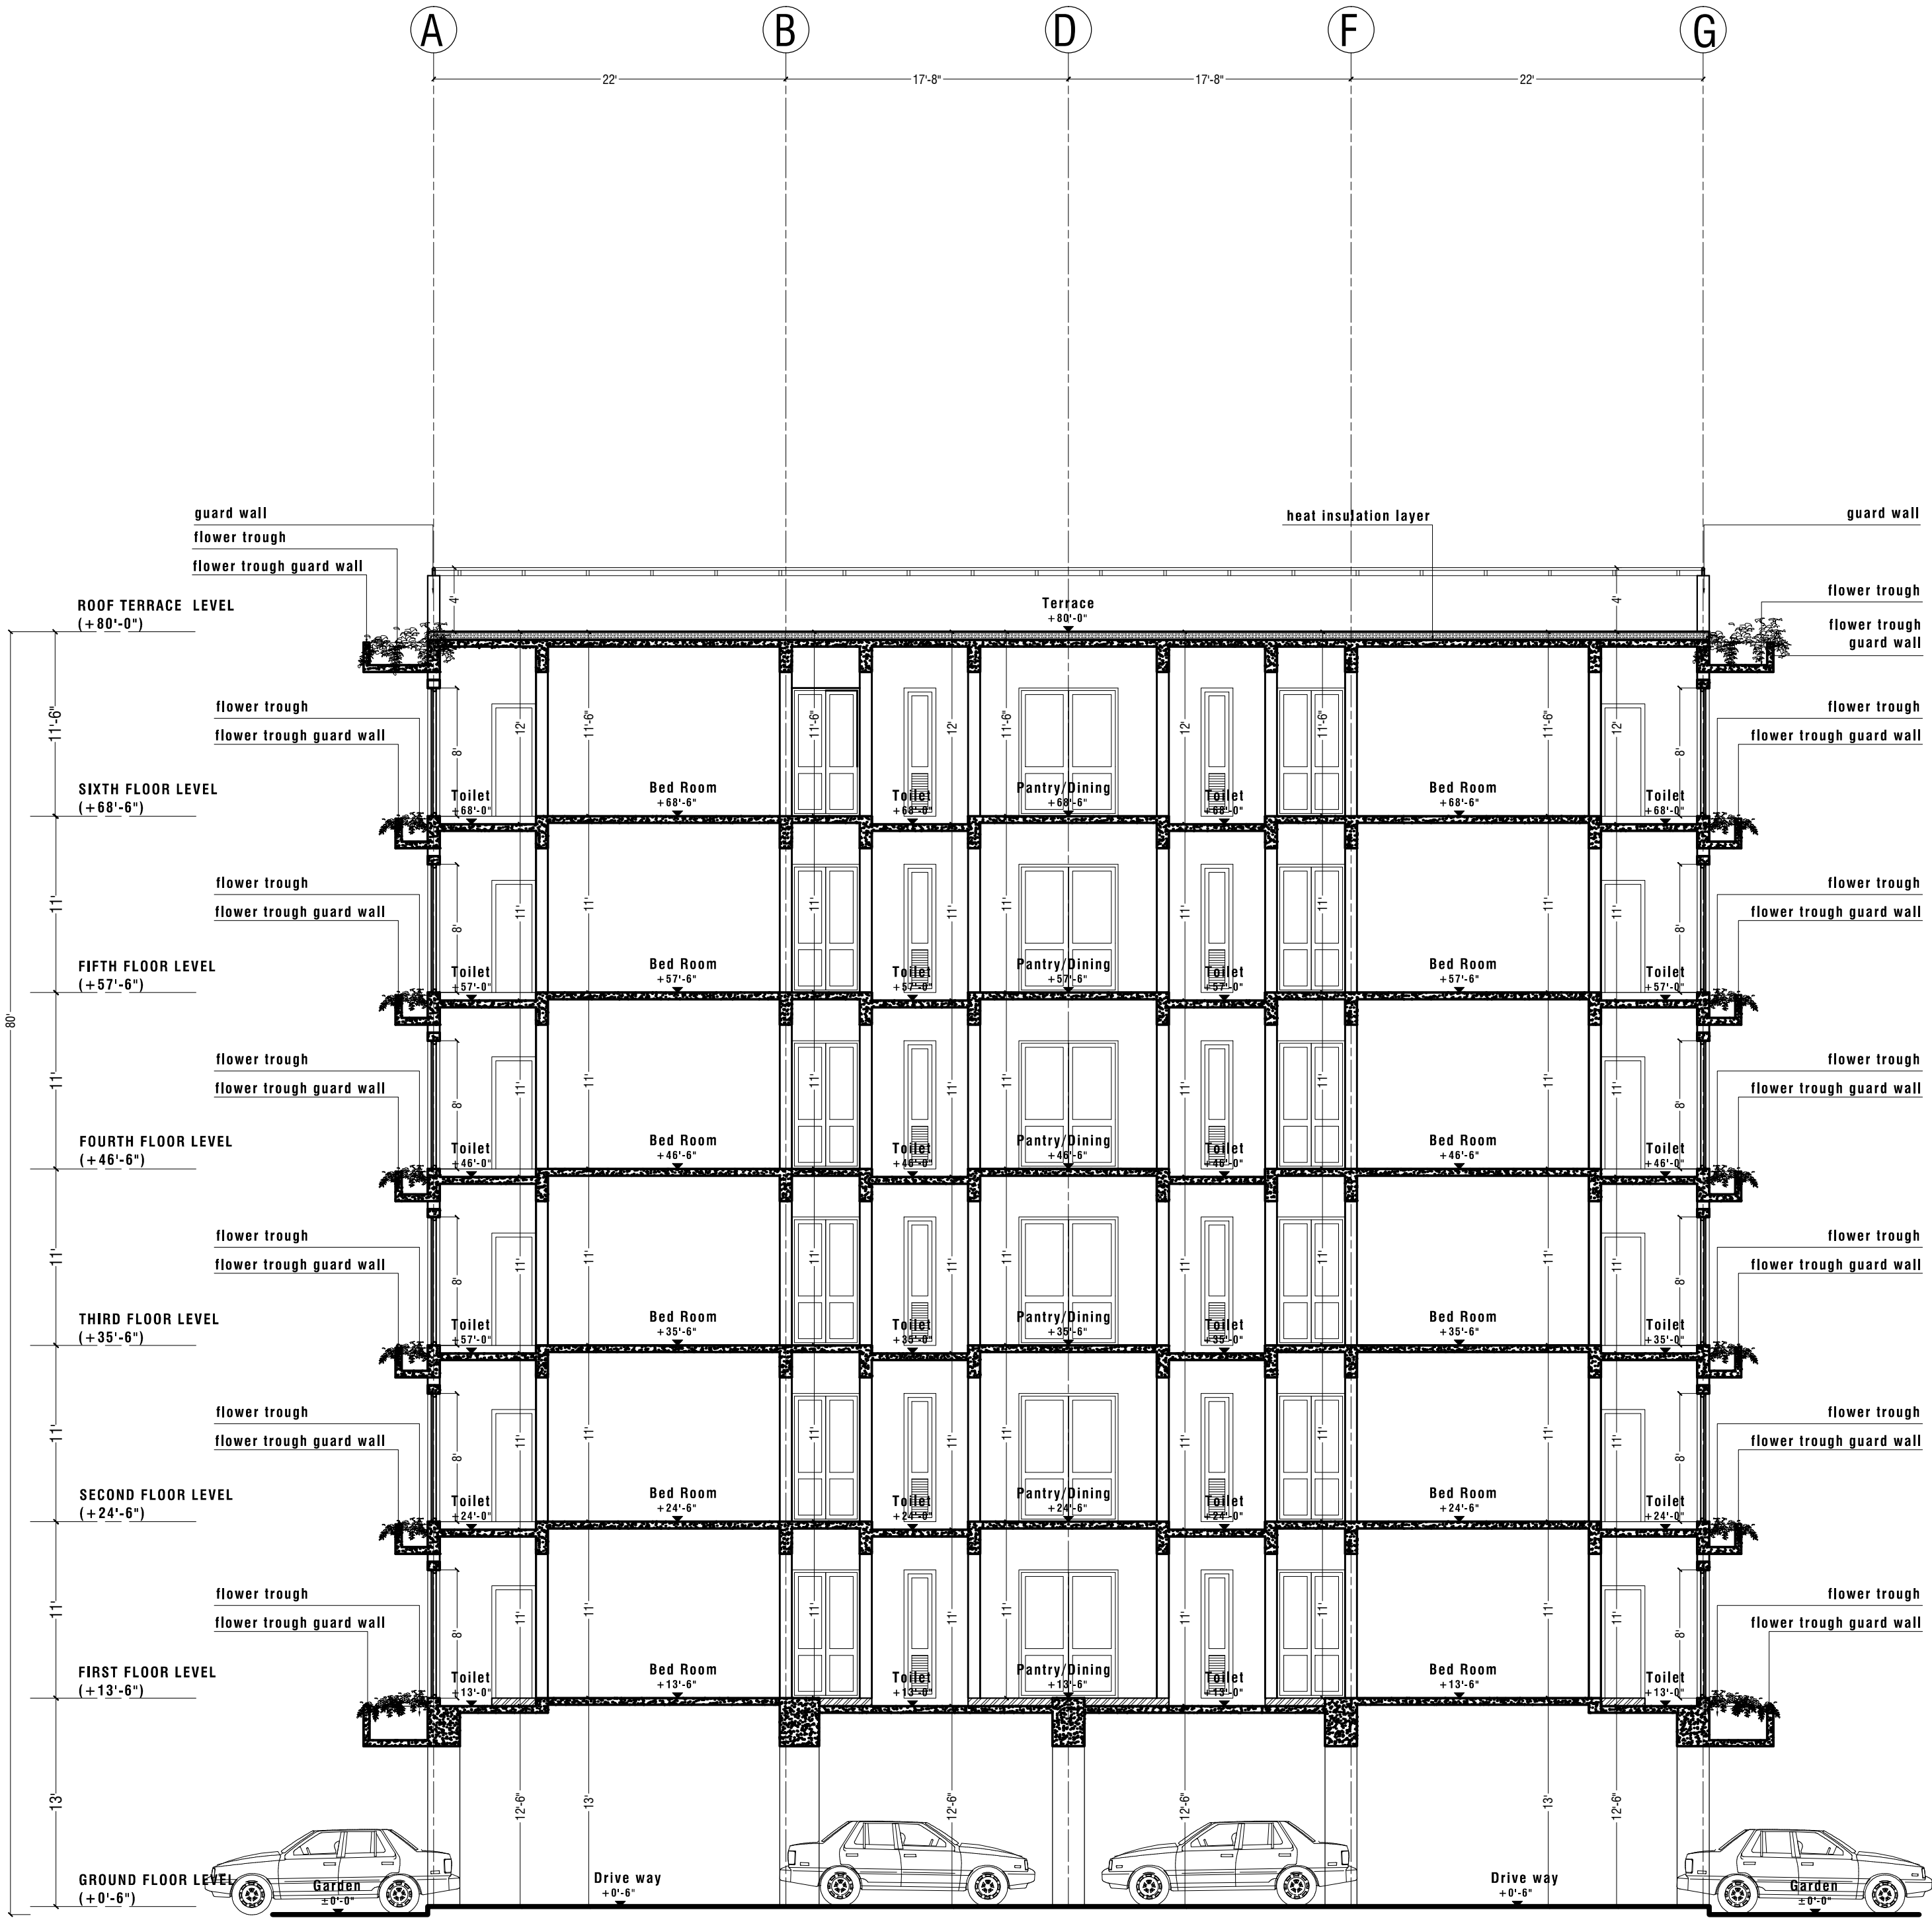

SECTIONAL ELEVATION B-B
SCALE : EIGHT FEET TO AN INCH

ARCHITECT'S SIGNATURE

ENGINEER'S SIGNATURE

APPLICANT'S SIGNATURE

C O U N C I L D R A W I N G - B L O C K 0 2

DRAWING TITLE: PROPOSED APARTMENT COMPLEX AT MATHEGODA.
02 BED ROOM APARTMENT -SECTIONAL ELEVATION B-B

DWG NO:
PRIME LAND/MATHEGODA/COUNCIL/02 BED ROOM APARTMENT -SECTIONAL ELEVATION B-B/AR /07

PAGE NO: 07

PAPER SIZE -A2

DRAWN BY NISHATHA

DATE 2017-08-31

SCALE EIGHT FEET TO AN INCH

CHECKED ANIL KUMARAGE

REVISION

PROJECT-

PROPOSED APARTMENT BUILDING
FOR PRIME HOMES (PVT) LTD.

NO:75, D.S SENANAYAKA ROAD,
COLOMBO 08.


AT LOT NO:
MATHEGODA.

ANIL KUMARAGE, CHARTERED ARCHITECTS, 409/2,3rd Lane, RoBUR:t Gunawardana Mawatha, Battaramulla, Sri Lanka.
Tel- 0714811625, 011-2868803. Email- akarchileam@gmail.com. Fax- 0112868803. All Designs and Drawings are the property of Anil Kumarage, and cannot be copied or used in any way without expressed permission.



APPLICANT'S SIGNATURE

C O U N C I L D R A W I N G - B L O C K 0 2										DRAWN BY NISHATHA										PROJECT - PROPOSED APARTMENT BUILDING FOR PRIME HOMES (PVT) LTD.		
DRAWING TITLE: PROPOSED APARTMENT COMPLEX AT MATHEGODA. 02 BED ROOM APARTMENT -FRONT ELEVATION										DATE 2017-08-31												
										SCALE EIGHT FEET TO AN INCH												
DWG NO: PRIME LAND/MATHEGODA/COUNCIL/02 BED ROOM APARTMENT -FRONT ELEVATION/AR /08										PAGE NO: 08		CHECKED ANIL KUMARAGE										NO:75, D.S SENANAYAKA ROAD, COLOMBO 08.
										PAPER SIZE -A2		REVISION										
ANIL KUMARAGE, CHARTERED ARCHITECTS, 409/2,3rd Lane, RoBUR:1 Gunawardana Mawatha, Battaramulla. Sri Lanka. Tel- 0714811625, 011-2868803. Email- akarchiteam@gmail.com. Fax- 0112868803. All Designs and Drawings are the property of Anil Kumarage, and cannot be copied or used in any way without expressed permission.																						AT LOT NO: MATHEGODA.

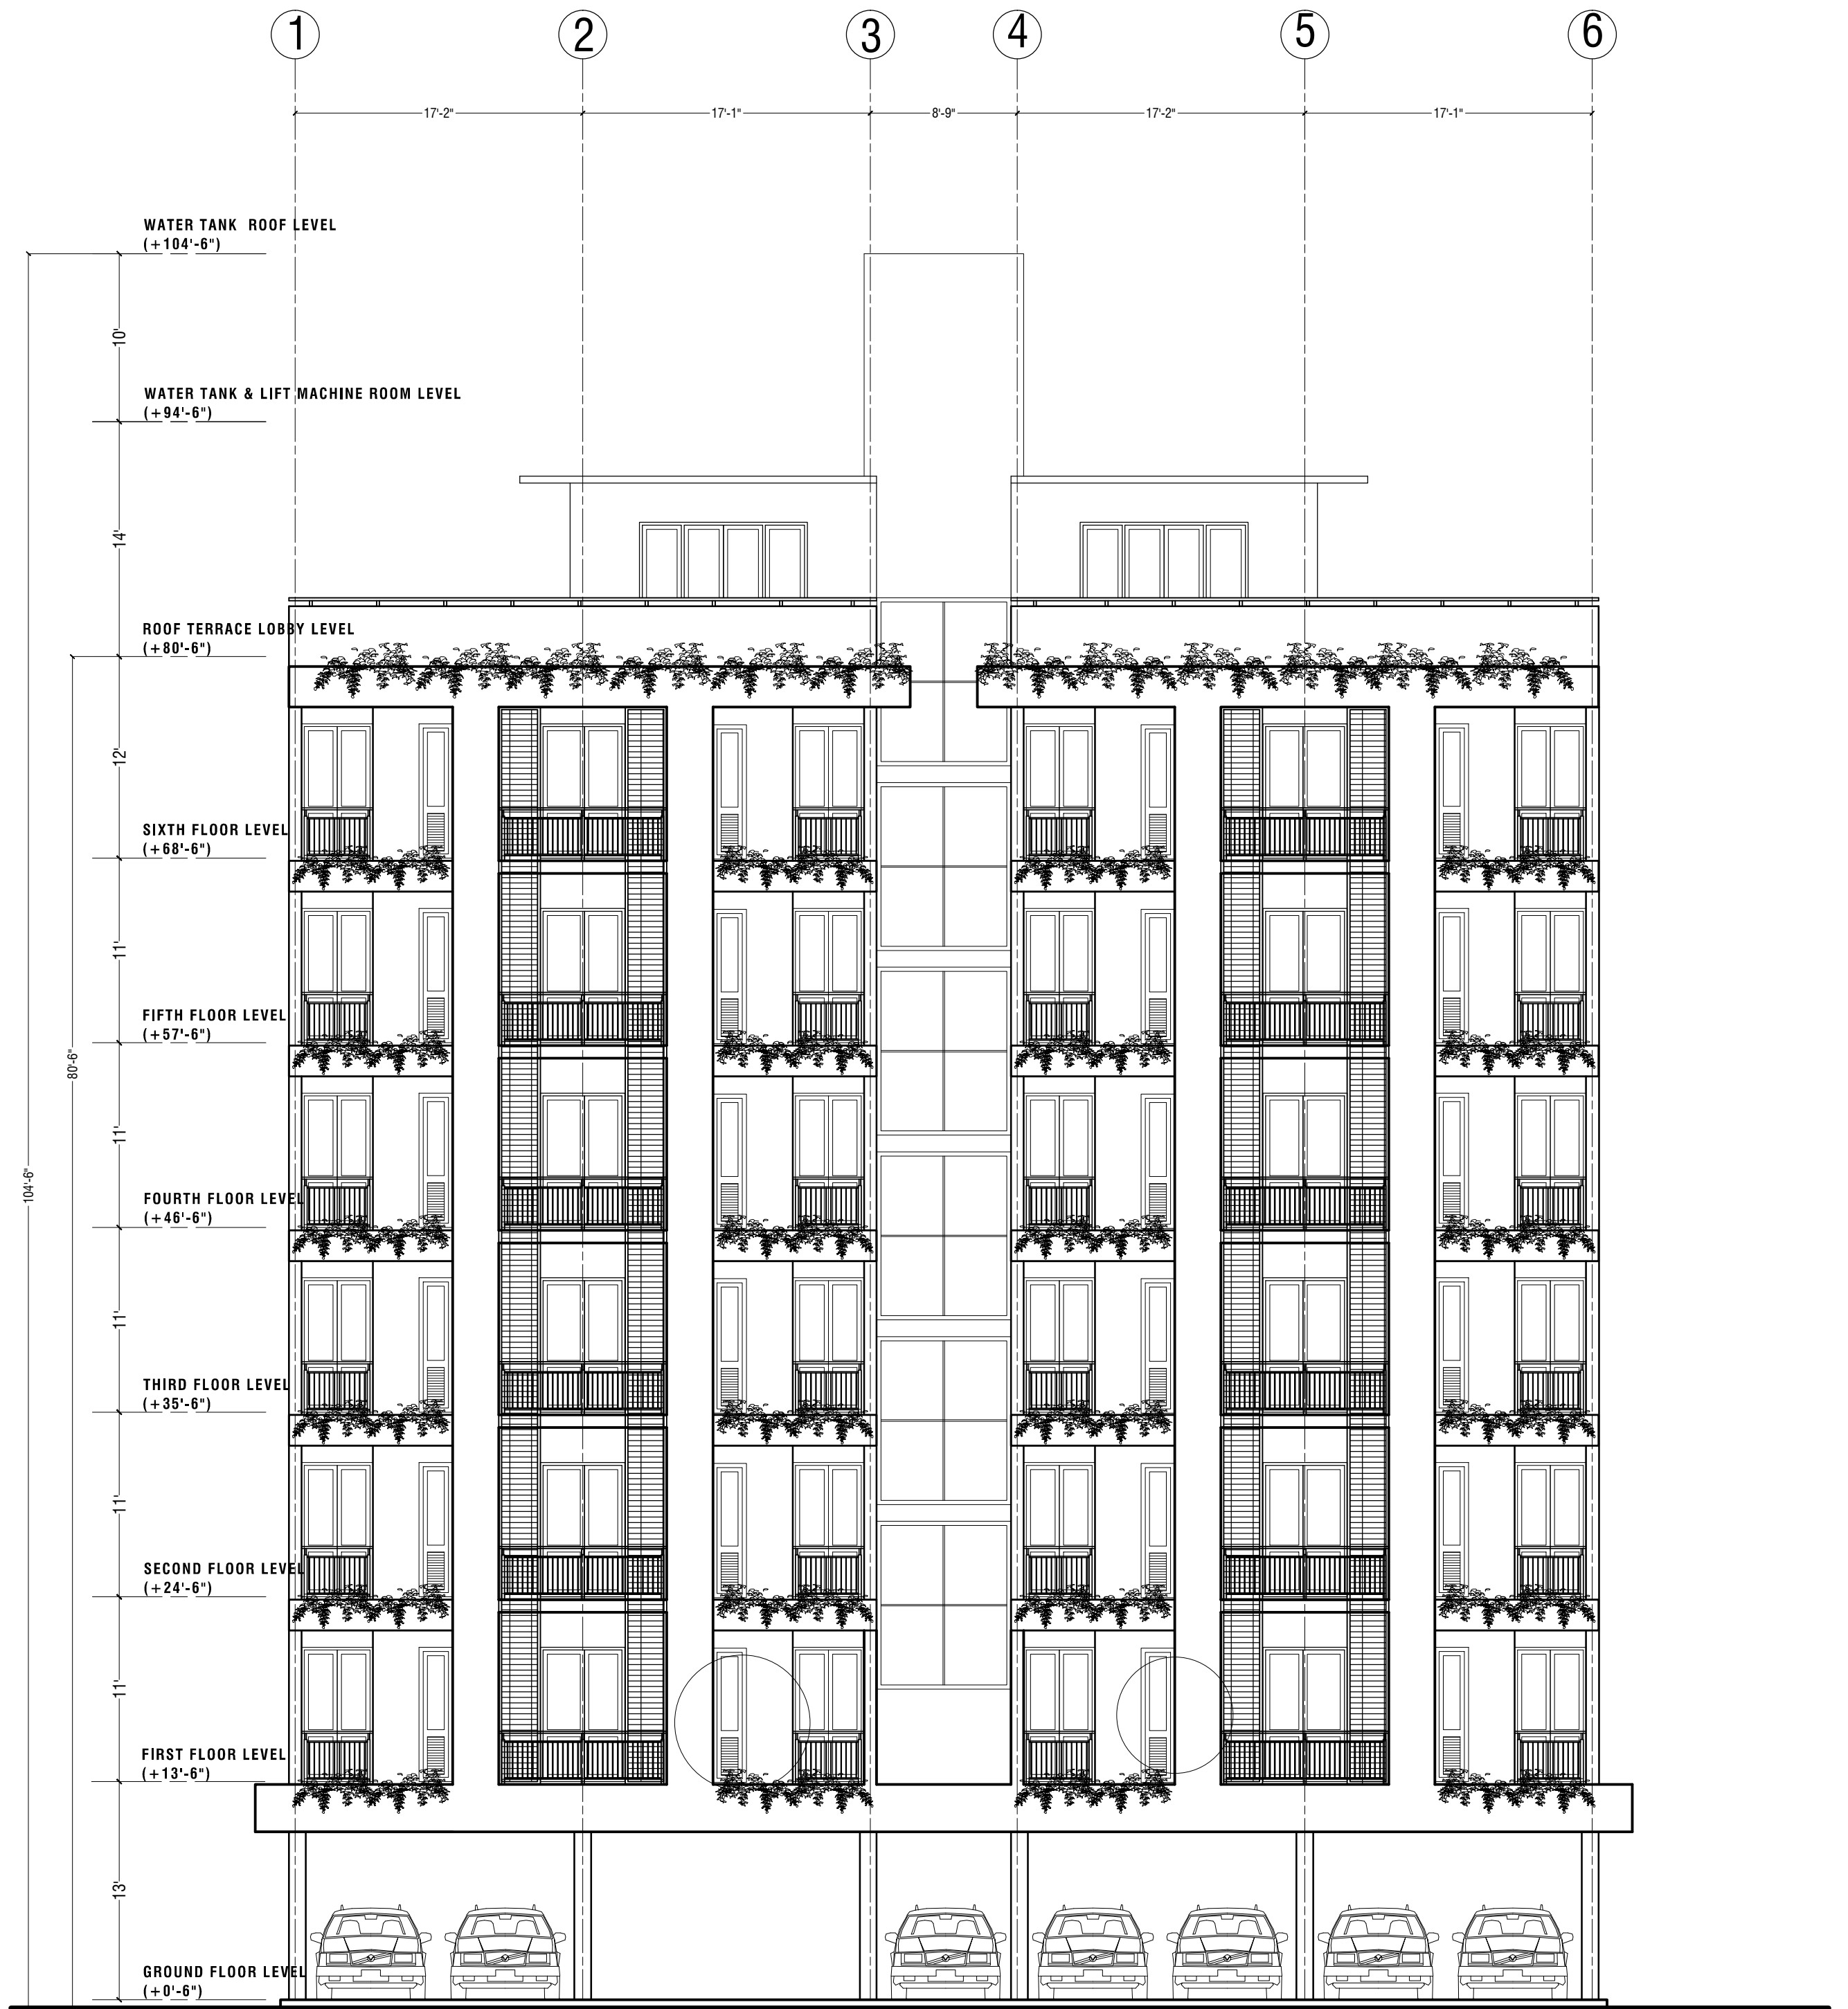

SIDE ELEVATION

SCALE : EIGHT FEET TO AN INCH

ARCHITECT'S SIGNATURE

ENGINEER'S SIGNATURE

APPLICANT'S SIGNATURE

C O U N C I L D R A W I N G - B L O C K 0 2

DRAWING TITLE: PROPOSED APARTMENT COMPLEX AT MATHEGODA.
02 BED ROOM APARTMENT -SIDE ELEVATION

DWG NO:
PRIME LAND/MATHEGODA/COUNCIL/02 BED ROOM APARTMENT -SIDE ELEVATION/AR /09

PAGE NO: 09

PAPER SIZE -A2

DRAWN BY NISHATHA

DATE 2017-08-31

SCALE EIGHT FEET TO AN INCH

CHECKED ANIL KUMARAGE

REVISION

PROJECT-

PROPOSED APARTMENT BUILDING
FOR PRIME HOMES (PVT) LTD.

NO:75, D.S SENANAYAKA ROAD,
COLOMBO 08.

AT LOT NO:
MATHEGODA.

ANIL KUMARAGE, CHARTERED ARCHITECTS, 409/2,3rd Lane, RoBUR:1 Gunawardana Mawatha, Battaramulla, Sri Lanka.
Tel- 0714811625, 011-2868803. Email- akarchileam@gmail.com. Fax- 0112868803. All Designs and Drawings are the property of Anil Kumarage, and cannot be copied or used in any way without expressed permission.

D O O R W I N D O W S C H E D U L E

TYPE	LOCATION	NOS								OPENING SIZE	SILL HEIGHT	LINTEL HEIGHT	DESCRIPTION
		ground	1st	2ND	3RD	4TH	5TH	6TH	TERRACE				
D1	ENTRANCE	-	06	06	06	06	06	06	-	4'-0" x 7'-0"	-	7'-0"	TIMBER PANELED DOOR
D2	BED ROOM	-	12	12	12	12	12	12	-	3'-0" x 7'-0"	-	7'-0"	TIMBER FRAMED SOLID DOOR
D2'	GARBAGE	01	-	-	-	-	-	-		3'-0" x 8'-0"	-	8'-0"	TIMBER FRAMED SOLID DOOR
D3	TOILETS	-	12	12	12	12	12	12	-	2'-9" x 7'-0"	-	7'-0"	TIMBER FRAMED SOLID DOOR
D5	DISABLE TOILET	-	-	-	-	-	-	-	-	3'-3" x 8'-0"	-	8'-0"	TIMBER FRAMED SOLID DOOR
D6	DUCT	-	14	14	14	14	14	14	02	2'-0" x 6'-0"	1'-0"	7'-0"	ALUMINUM FRAMED COMPOSITE PANEL DOOR
D7	DUCT	01	02	02	02	02	02	02	02	4'-0" x 6'-0"	1'-0"	7'-0"	ALUMINUM FRAMED COMPOSITE PANEL DOOR
D8	DUCT	01	-	-	-	-	-	-	-	2'-10" x 6'-0"	1'-0"	7'-0"	ALUMINUM FRAMED COMPOSITE PANEL DOOR
FG	STAIRCASE	-	01	01	01	01	01	01	-	8'-0" x 8'-0"	-	8'-0"	ALUMINUM FRAMED GLAZED WINDOW
FG1	STAIRCASE LOBBY	-	02	02	02	02	02	02	-	4'-0" x 8'-0"	-	8'-0"	ALUMINUM FRAMED GLAZED WINDOW
SL	LOBBY	-	-	-	-	-	-	-	02	6'-0" x 8'-0"	-	8'-0"	ALUMINUM FRAMED SLIDING WINDOW
SL1	LIVING/DINING & PANTRY	-	02	02	02	02	02	02	-	6'-2" x 8'-0"	-	8'-0"	ALUMINUM FRAMED SLIDING WINDOW
SL2	GYM/CONDOMINIUM ROOM	-	-	-	-	-	-	-	08	10'-0" x 8'-0"	-	8'-0"	ALUMINUM FRAMED SLIDING WINDOW
FW1	LIVING/DINING & PANTRY	-	04	04	04	04	04	04	-	5'-0" x 8'-0"	-	8'-0"	ALUMINUM FRAMED FRENCH WINDOW
FW2	BED ROOM	-	12	12	12	12	12	12	-	4'-3" x 8'-0"	-	8'-0"	ALUMINUM FRAMED FRENCH WINDOW
LW	TOILET	-	12	12	12	12	12	12	-	2'-0" x 8'-0"	-	8'-0"	ALUMINUM FRAMED LOWERED WINDOW
LW1	WATER TANK	-	-	-	-	-	-	-	01	10'-3" x 7'-0"	-	7'-0"	ALUMINUM FRAMED LOUVERED WINDOW
GD	PANEL ROOM	01	-	-	-	-	-	-	-	4'-0" x 8'-0"	-	8'-0"	G.I. GATE
RD	TRANSFORMER	-	-	-	-	-	-	-	-	8'-0" x 8'-0"	-	8'-0"	ROLLER DOOR

UNIT FLOOR AREA'S

FIRST FLOOR		
UNIT 01 (TYPE A)		805 Sq. ft.
UNIT 02 (TYPE B)		847 Sq. ft.
UNIT 03 (TYPE C)		805 Sq. ft.
UNIT 04 (TYPE D)		805 Sq. ft.
UNIT 05 (TYPE E)		847 Sq. ft.
UNIT 06 (TYPE F)		805 Sq. ft.


SECOND FLOOR		
UNIT 07 (TYPE A)		805 Sq. ft.
UNIT 08 (TYPE B)		847 Sq. ft.
UNIT 09 (TYPE C)		805 Sq. ft.
UNIT 10 (TYPE D)		805 Sq. ft.
UNIT 11 (TYPE E)		847 Sq. ft.
UNIT 12 (TYPE F)		805 Sq. ft.

THIRD FLOOR		
UNIT 13 (TYPE A)		805 Sq. ft.
UNIT 14 (TYPE B)		847 Sq. ft.
UNIT 15 (TYPE C)		805 Sq. ft.
UNIT 16 (TYPE D)		805 Sq. ft.
UNIT 17 (TYPE E)		847 Sq. ft.
UNIT 18 (TYPE F)		805 Sq. ft.


FOURTH FLOOR		
UNIT 19 (TYPE A)		805 Sq. ft.
UNIT 20 (TYPE B)		847 Sq. ft.
UNIT 21 (TYPE C)		805 Sq. ft.
UNIT 22 (TYPE D)		805 Sq. ft.
UNIT 23 (TYPE E)		847 Sq. ft.
UNIT 24 (TYPE F)		805 Sq. ft.

SIXTH FLOOR		
UNIT 31 (TYPE A)		805 Sq. ft.
UNIT 32 (TYPE B)		847 Sq. ft.
UNIT 33 (TYPE C)		805 Sq. ft.
UNIT 34 (TYPE D)		805 Sq. ft.
UNIT 35 (TYPE E)		847 Sq. ft.
UNIT 36 (TYPE F)		805 Sq. ft.






FIFTH FLOOR		
UNIT 25 (TYPE A)		805 Sq. ft.
UNIT 26 (TYPE B)		847 Sq. ft.
UNIT 27 (TYPE C)		805 Sq. ft.
UNIT 28 (TYPE D)		805 Sq. ft.
UNIT 29 (TYPE E)		847 Sq. ft.
UNIT 30 (TYPE F)		805 Sq. ft.

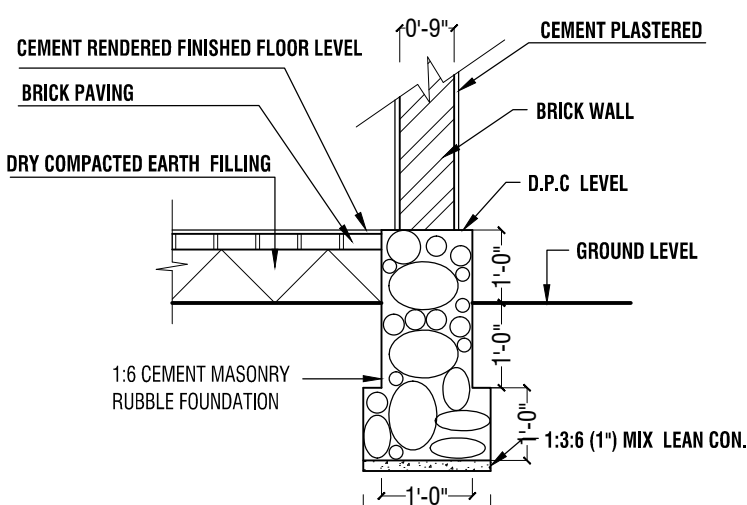

INTERNAL WALL FOUNDATION
SCALE : TWO FEET TO AN INCH

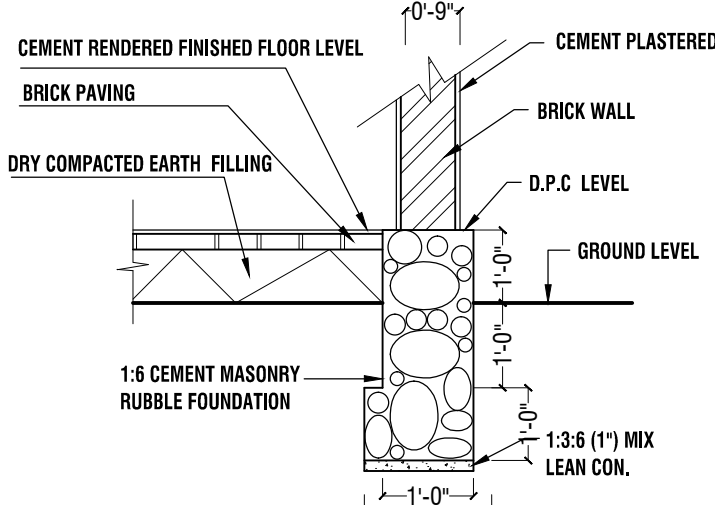

BLIND WALL FOUNDATION
SCALE : TWO FEET TO AN INCH

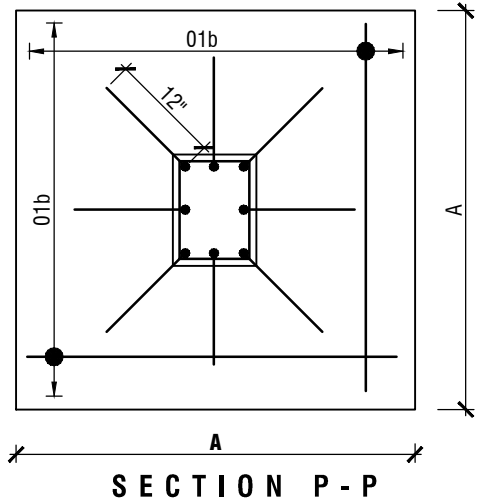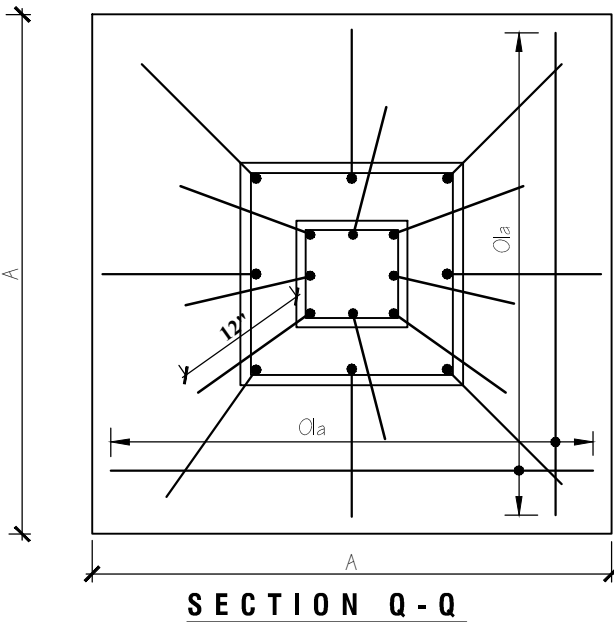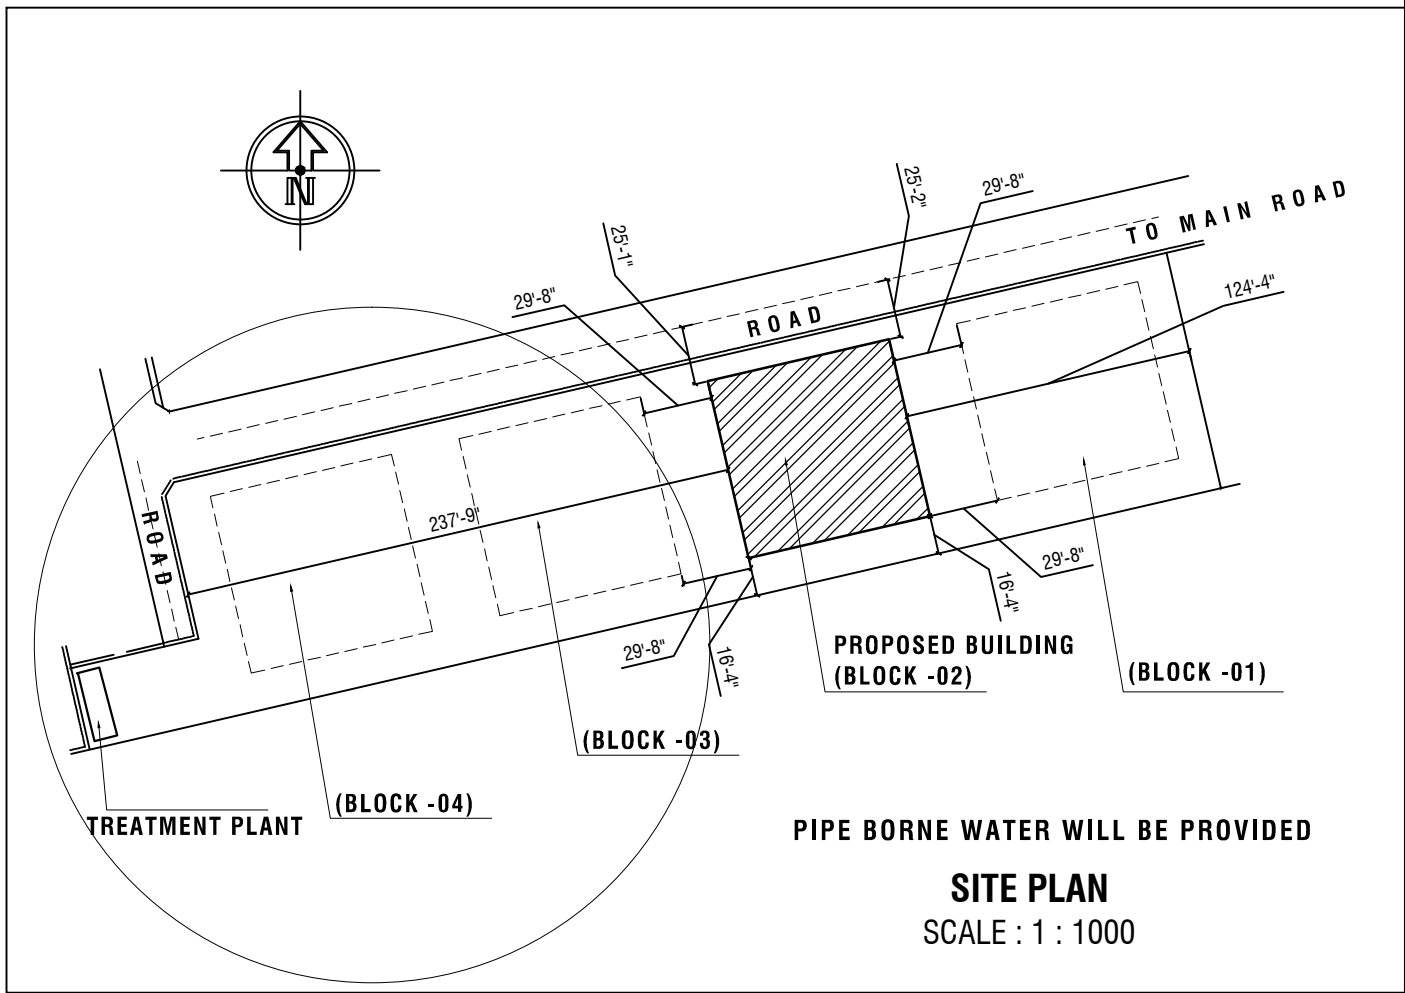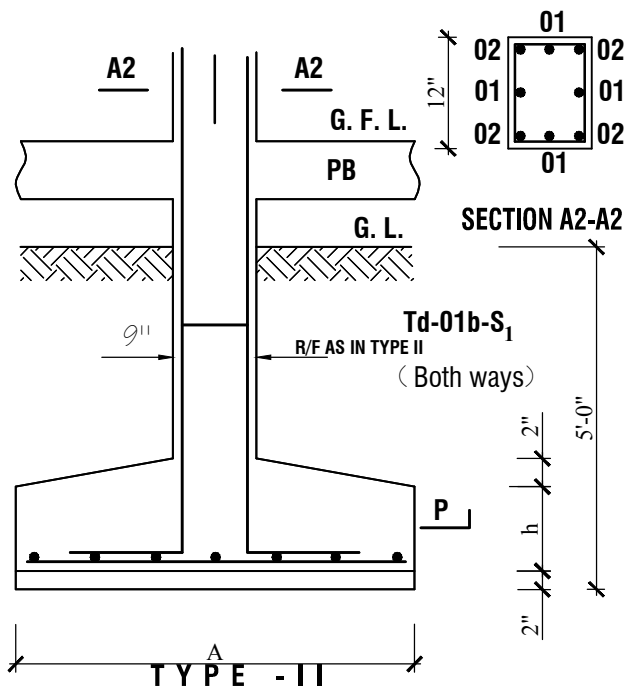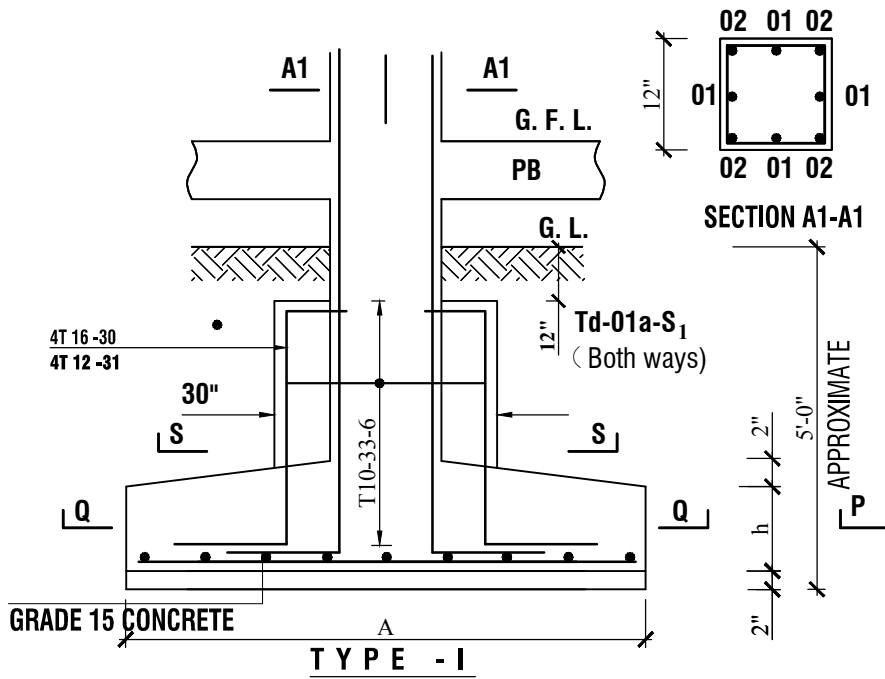

DETAILS OF COLUMNS & FOOTINGS
SCALE : NOT TO SCALE

ARCHITECT'S SIGNATURE

ENGINEER'S SIGNATURE

APPLICANT'S SIGNATURE

C O U N C I L D R A W I N G - B L O C K 0 2

DRAWING TITLE: PROPOSED APARTMENT COMPLEX AT MATHEGODA.

02 BED ROOM APARTMENT -DOOR WINDOW SCHEDULE/UNIT FLOOR AREA'S/ FOUNDATION DETAIL/SITE PLAN

DWG NO:
PRIME LAND/MATHEGODA/COUNCIL/02 BED ROOM APARTMENT -SCHEDULE,LWOOR AREA'S,FOUNDATION & SITE PLAN/AR /10

PAGE NO:10

PAPER SIZE -A2

DRAWN BY NISHATHA

DATE 2017-08-31

SCALE EIGHT FEET TO AN INCH

CHECKED ANIL KUMARAGE

REVISION


PROJECT-

PROPOSED APARTMENT BUILDING
FOR PRIME HOMES (PVT) LTD.

NO:75, D.S SENANAYAKA ROAD,
COLOMBO 08.

AT LOT NO:
MATHEGODA.

ANIL KUMARAGE, CHARTERED ARCHITECTS, 409/2,3rd Lane, RoBUR:t Gunawardana Mawatha, Battaramulla. Sri Lanka.
Tel- 0714811625, 011-2868803. Email- akarchileam@gmail.com. Fax- 0112868803. All Designs and Drawings are the property of Anil Kumarage, and cannot be copied or used in any way without expressed permission.

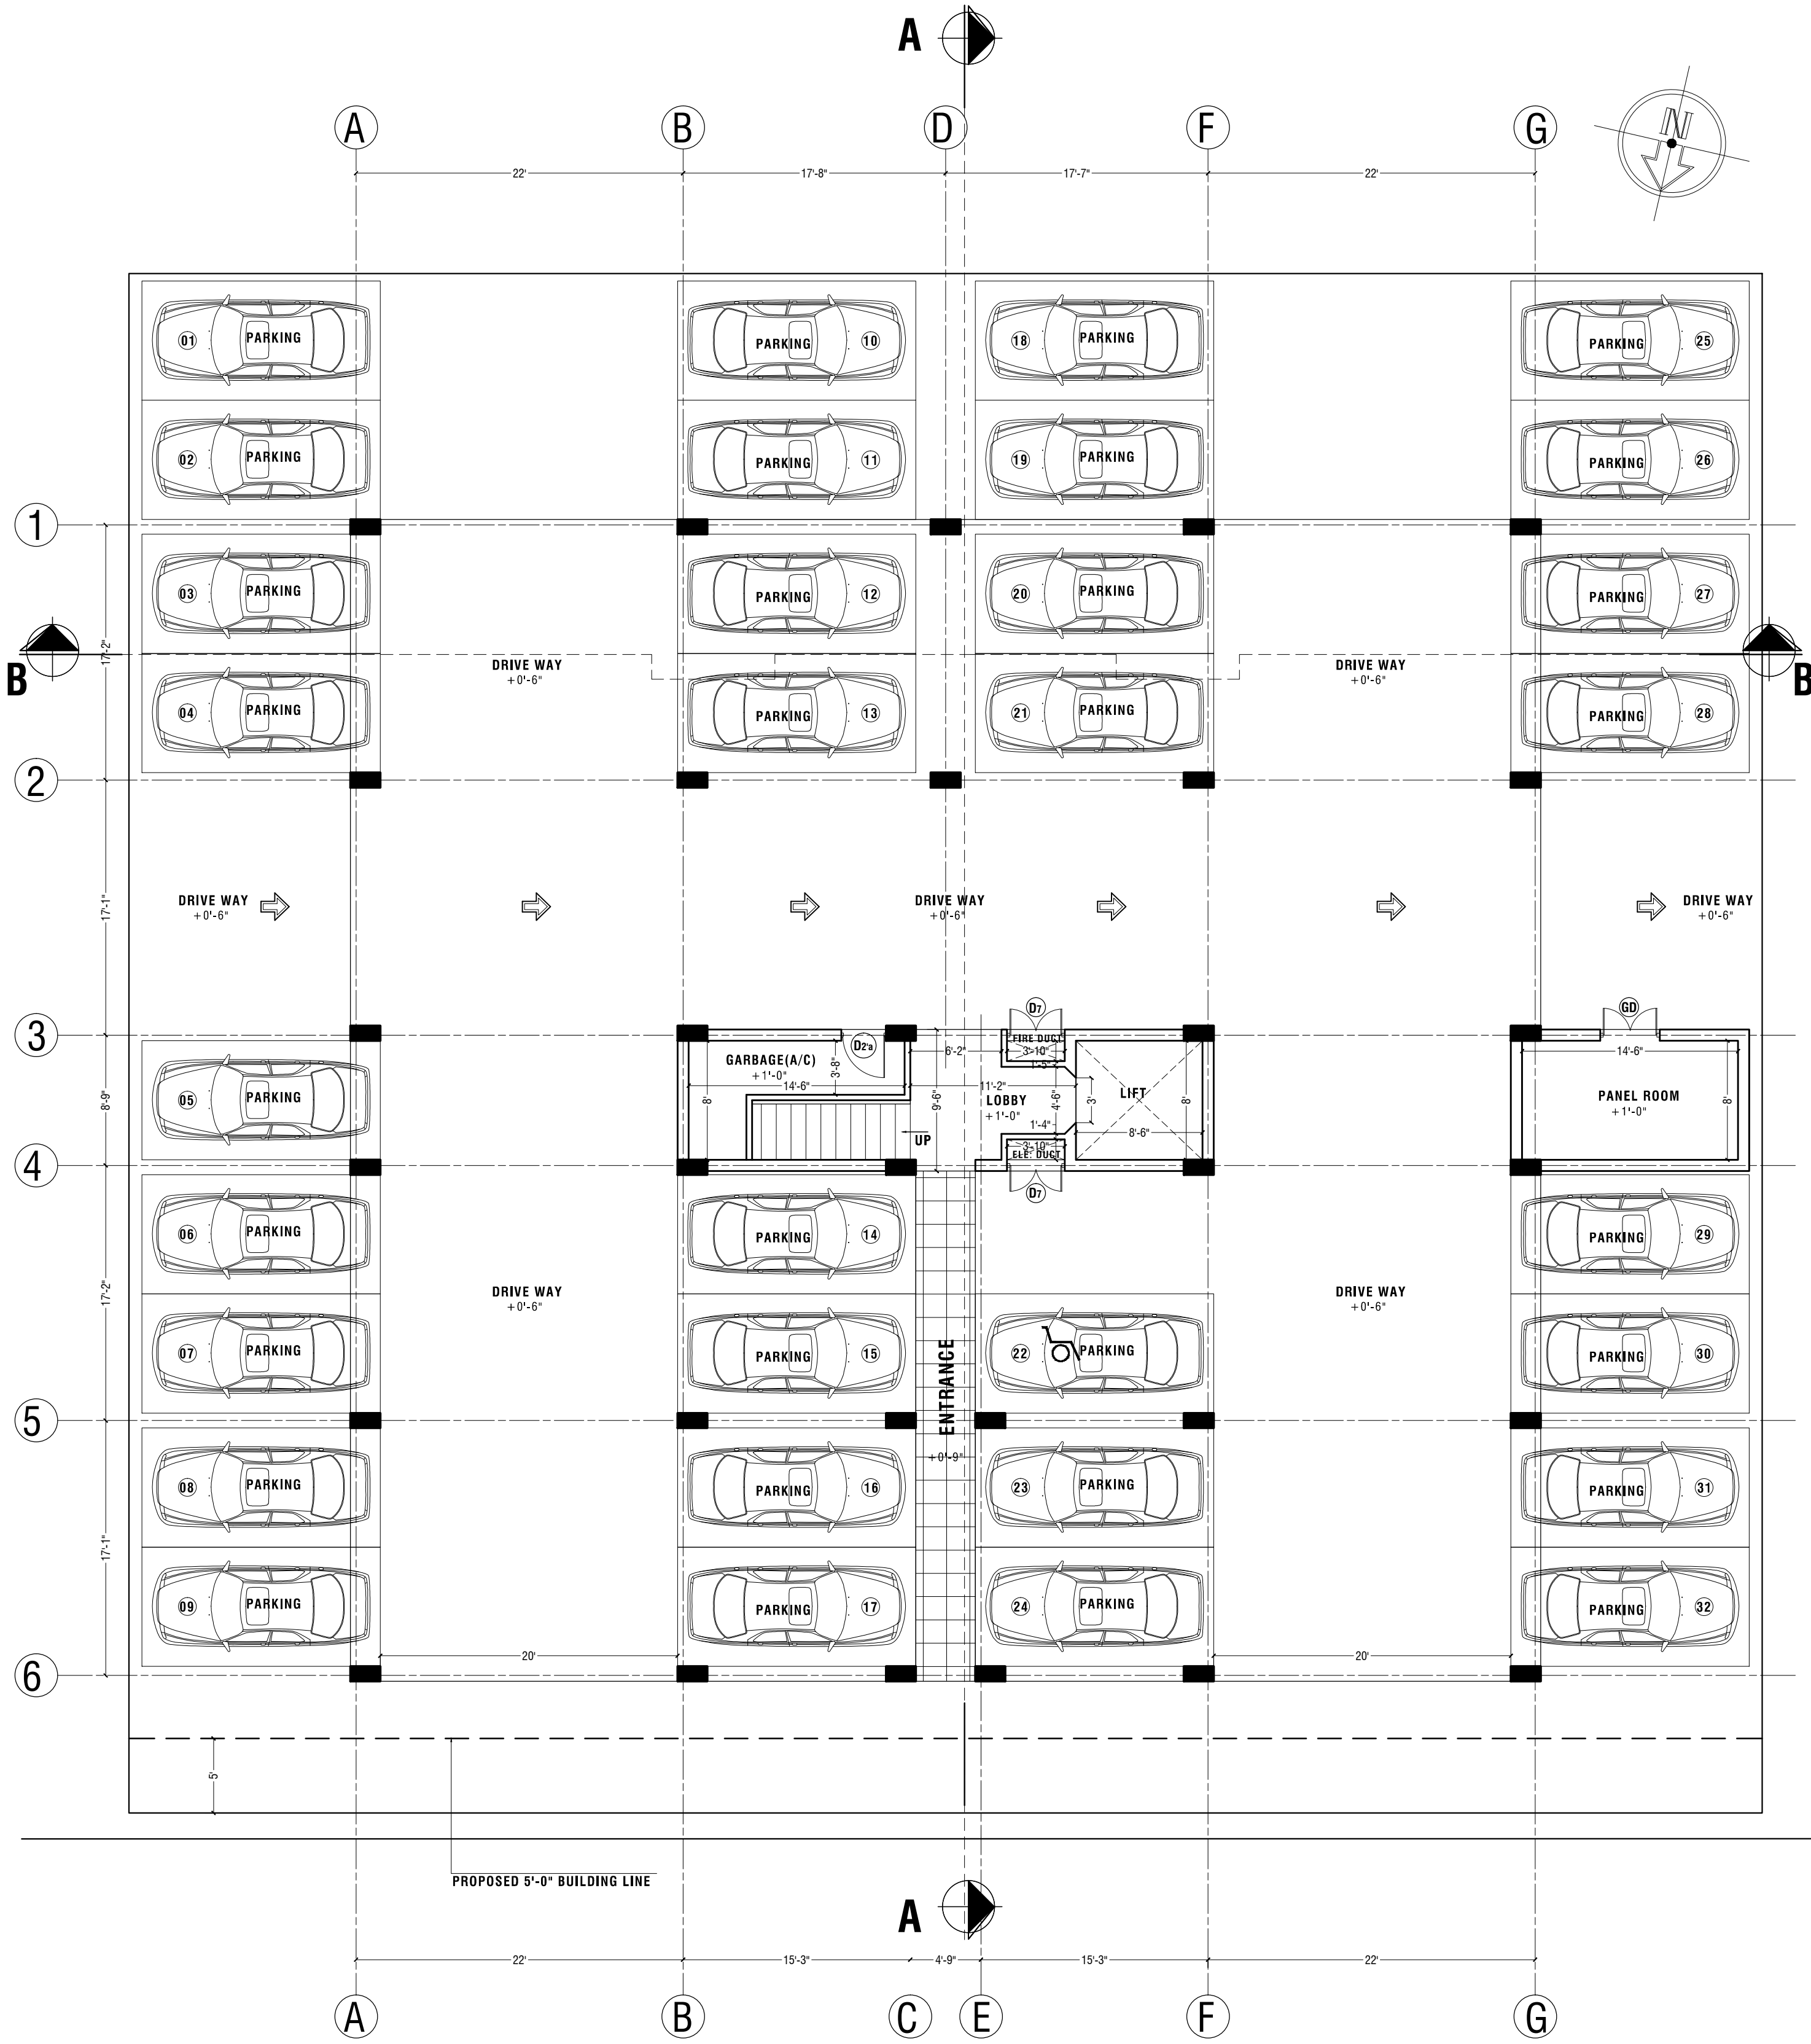

BLOCK-02,03&04(02 BED ROOM)
GROUND FLOOR PLAN
SCALE : EIGHT FEET TO AN INCH
FLOOR AREA :6233 SQ.FT

ARCHITECT'S SIGNATURE ENGINEER'S SIGNATURE APPLICANT'S SIGNATURE

C O U N C I L D R A W I N G - B L O C K 0 2					DRAWN BY NISHATHA					PROJECT- PROPOSED APARTMENT BUILDING FOR PRIME HOMES (PVT) LTD. NO:75, D.S SENANAYAKA ROAD, COLOMBO 08. AT LOT NO: MATHEGODA.									
DRAWING TITLE: PROPOSED APARTMENT COMPLEX AT MATHEGODA. 02 BED ROOM APARTMENT -GROUND FLOOR PLAN					DATE 2017-08-31														
					SCALE EIGHT FEET TO AN INCH														
DWG NO: PRIME LAND/MATHEGODA/COUNCIL/02 BED ROOM APARTMENT -TYPICAL FLOOR PLAN/AR /01					PAGE NO: 01					CHECKED ANIL KUMARAGE									
					PAPER SIZE -A2					REVISION									
ANIL KUMARAGE, CHARTERED ARCHITECTS, 409/2,3rd Lane, RoBUR:t Gunawardana Mawatha, Battaramulla. Sri Lanka. Tel- 0714811625, 011-2868803. Email- akarchiteam@gmail.com. Fax- 0112868803. All Designs and Drawings are the property of Anil Kumarage, and cannot be copied or used in any way without expressed permission.																			



FIRST FLOOR PLAN
SCALE : EIGHT FEET TO AN INCH
FLOOR AREA : 5 560 SQ.FT

ARCHITECT'S SIGNATURE

ENGINEER'S SIGNATURE

APPLICANT'S SIGNATURE

C O U N C I L D R A W I N G - B L O C K 0 2

DRAWING TITLE: PROPOSED APARTMENT COMPLEX AT MATHEGODA.
02 BED ROOM APARTMENT -FIRST FLOOR PLAN

DWG NO:
PRIME LAND/MATHEGODA/COUNCIL/02 BED ROOM APARTMENT -FIRST FLOOR PLAN/AR /02

PAGE NO: 02

PAPER SIZE -A2

DRAWN BY NISHATHA

DATE 2017-08-31

SCALE EIGHT FEET TO AN INCH

CHECKED ANIL KUMARAGE

REVISION


PROJECT-

PROPOSED APARTMENT BUILDING
FOR PRIME HOMES (PVT) LTD.

NO:75, D.S SENANAYAKA ROAD,
COLOMBO 08.

AT LOT NO:
MATHEGODA.

ANIL KUMARAGE, CHARTERED ARCHITECTS, 409/2,3rd Lane, RoBUR:t Gunawardana Mawatha, Battaramulla, Sri Lanka.
Tel- 0714811625, 011-2868803. Email- akarchileam@gmail.com. Fax- 0112868803. All Designs and Drawings are the property of Anil Kumarage, and cannot be copied or used in any way without expressed permission.

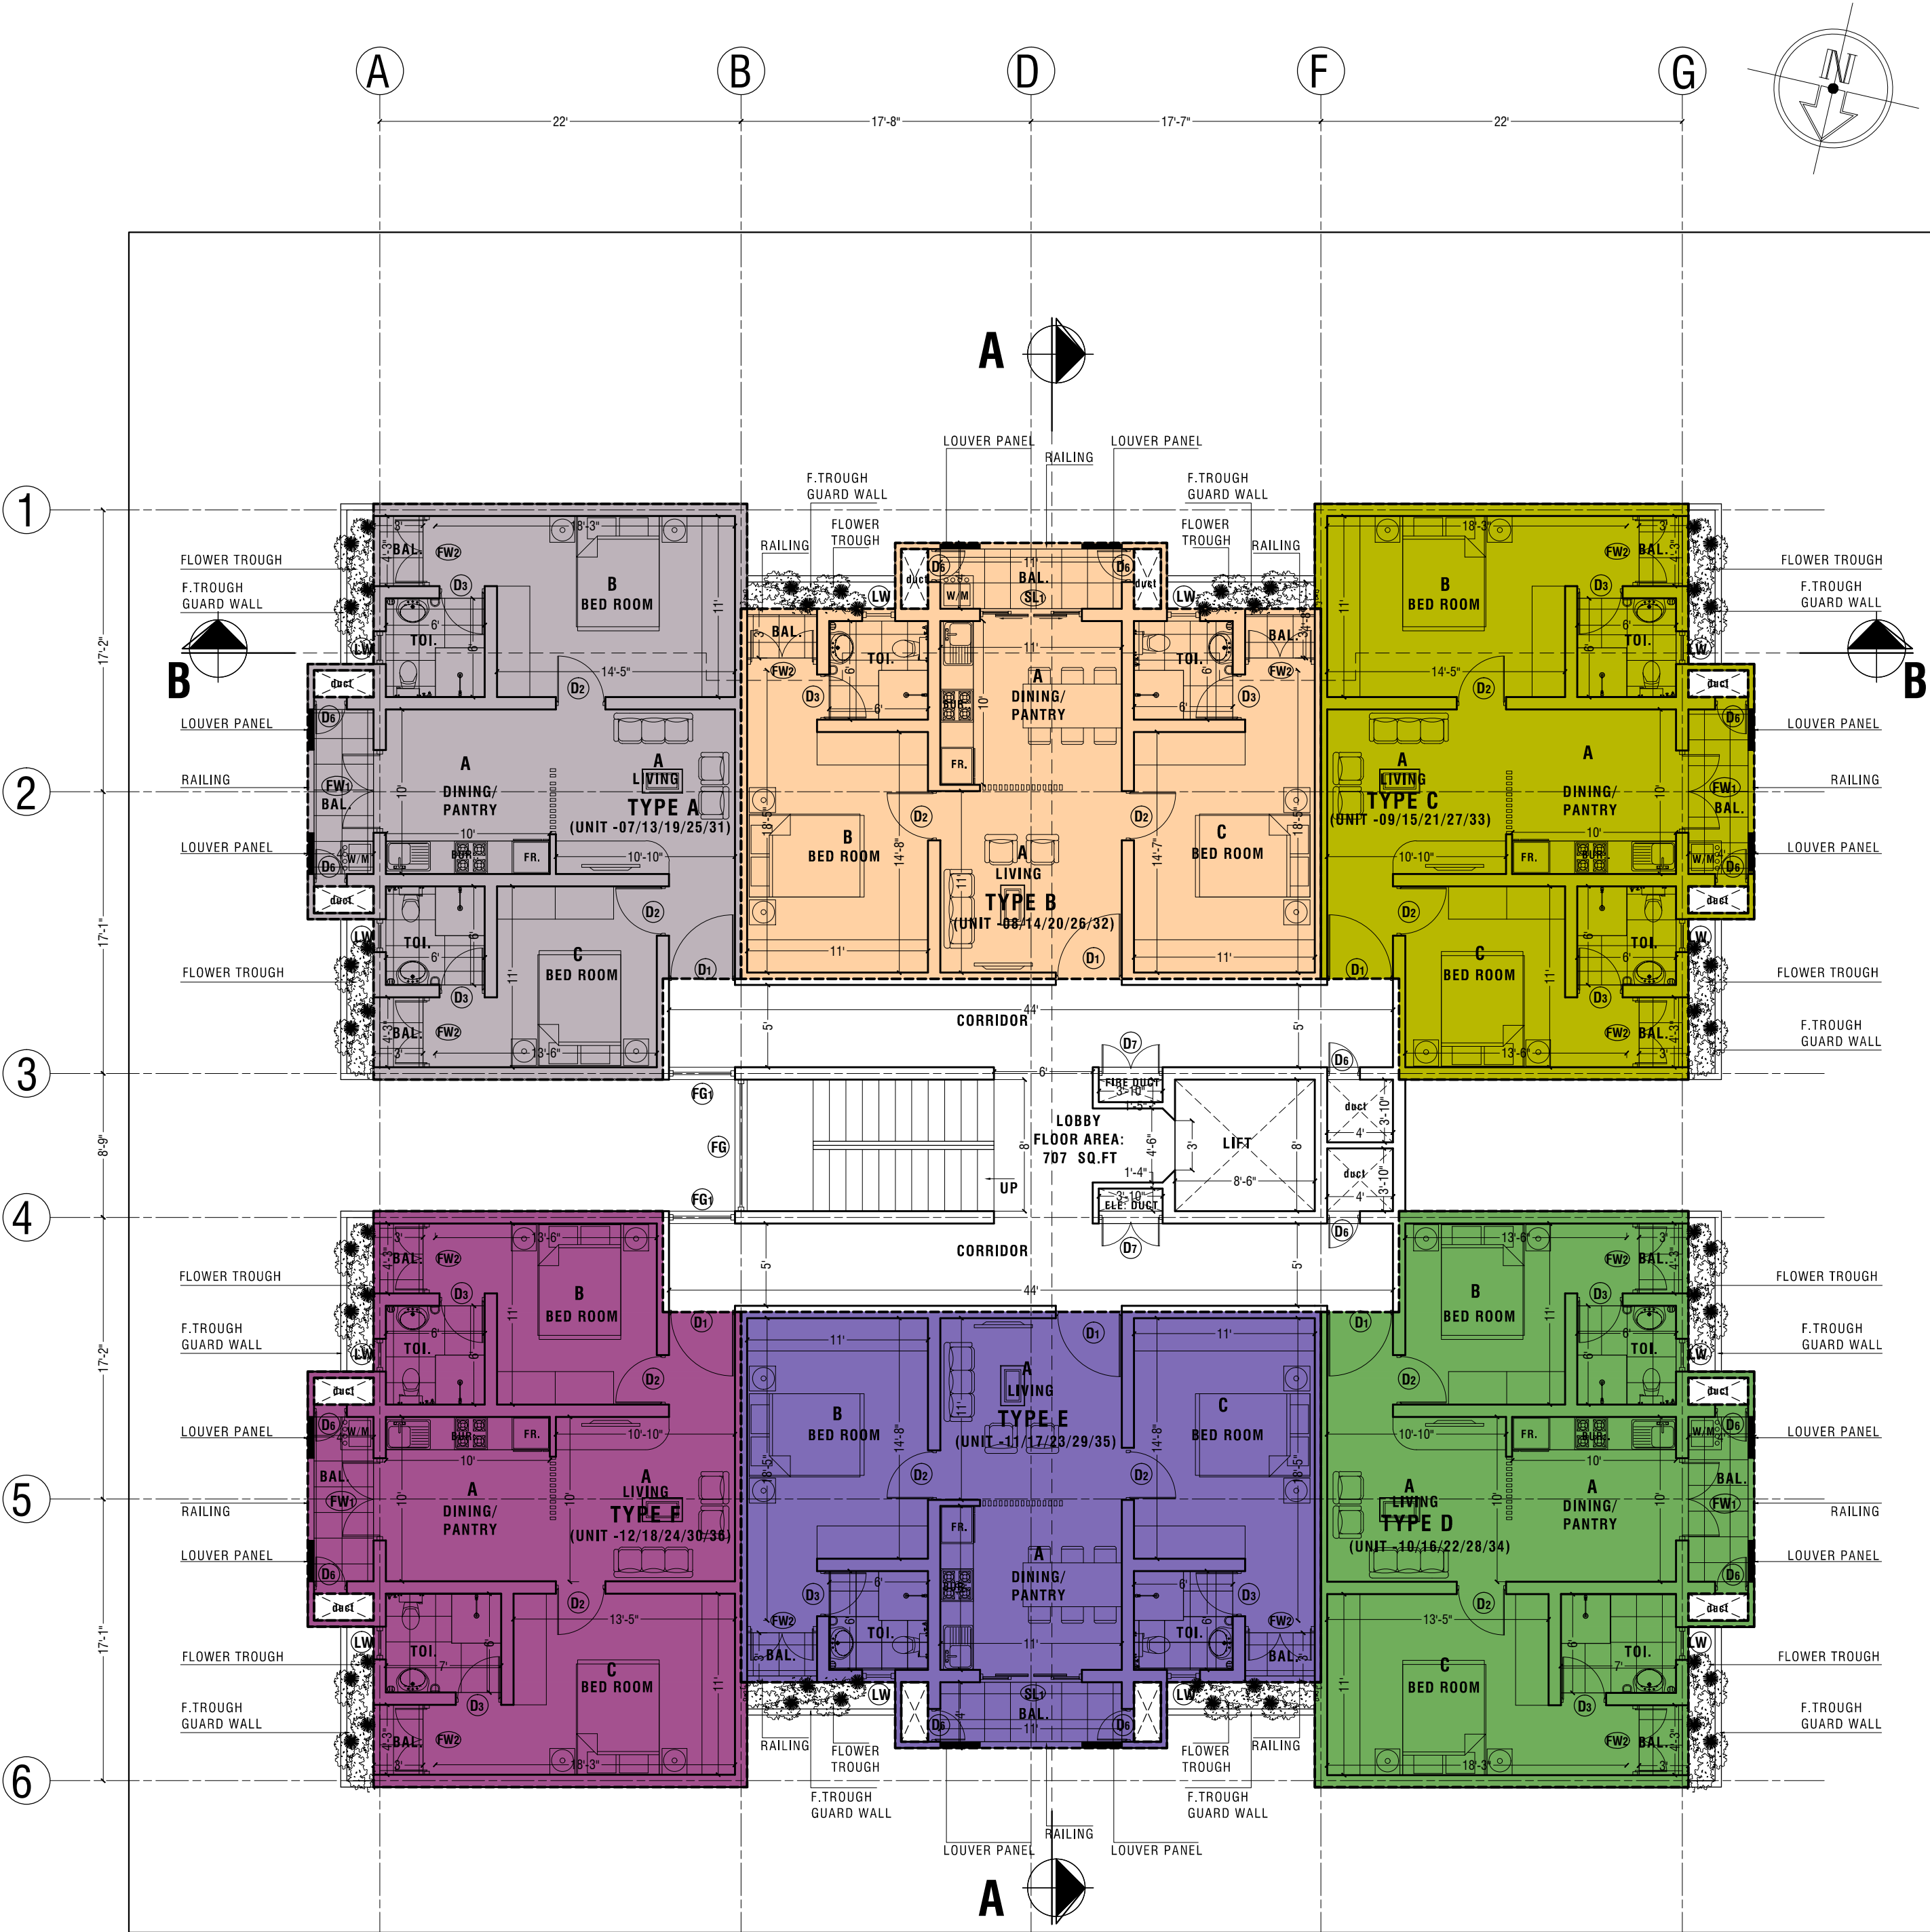

TYPICAL FLOOR PLAN
(0 2 N D , 3 R D , 4 T H , 5 T H & 6 T H)
SCALE : EIGHT FEET TO AN INCH
FLOOR AREA : 5 620 SQ.FT X05=28 100 SQ.FT

ARCHITECT'S SIGNATURE

ENGINEER'S SIGNATURE

APPLICANT'S SIGNATURE

C O U N C I L D R A W I N G - B L O C K 0 2

DRAWING TITLE: PROPOSED APARTMENT COMPLEX AT MATHEGODA.
02 BED ROOM APARTMENT -TYPICAL FLOOR PLAN

DWG NO:
PRIME LAND/MATHEGODA/COUNCIL/02 BED ROOM APARTMENT -TYPICAL FLOOR PLAN/AR /03

PAGE NO: 03

PAPER SIZE -A2

DRAWN BY NISHATHA

DATE 2017-08-31

SCALE EIGHT FEET TO AN INCH

CHECKED ANIL KUMARAGE

REVISION


PROJECT-

PROPOSED APARTMENT BUILDING
FOR PRIME HOMES (PVT) LTD.

NO:75, D.S SENANAYAKA ROAD,
COLOMBO 08.

AT LOT NO:
MATHEGODA.

ANIL KUMARAGE, CHARTERED ARCHITECTS, 409/2,3rd Lane, RoBUR:t Gunawardana Mawatha, Battaramulla, Sri Lanka.
Tel- 0714811625, 011-2868803. Email- akarchileam@gmail.com. Fax- 0112868803. All Designs and Drawings are the property of Anil Kumarage, and cannot be copied or used in any way without expressed permission.

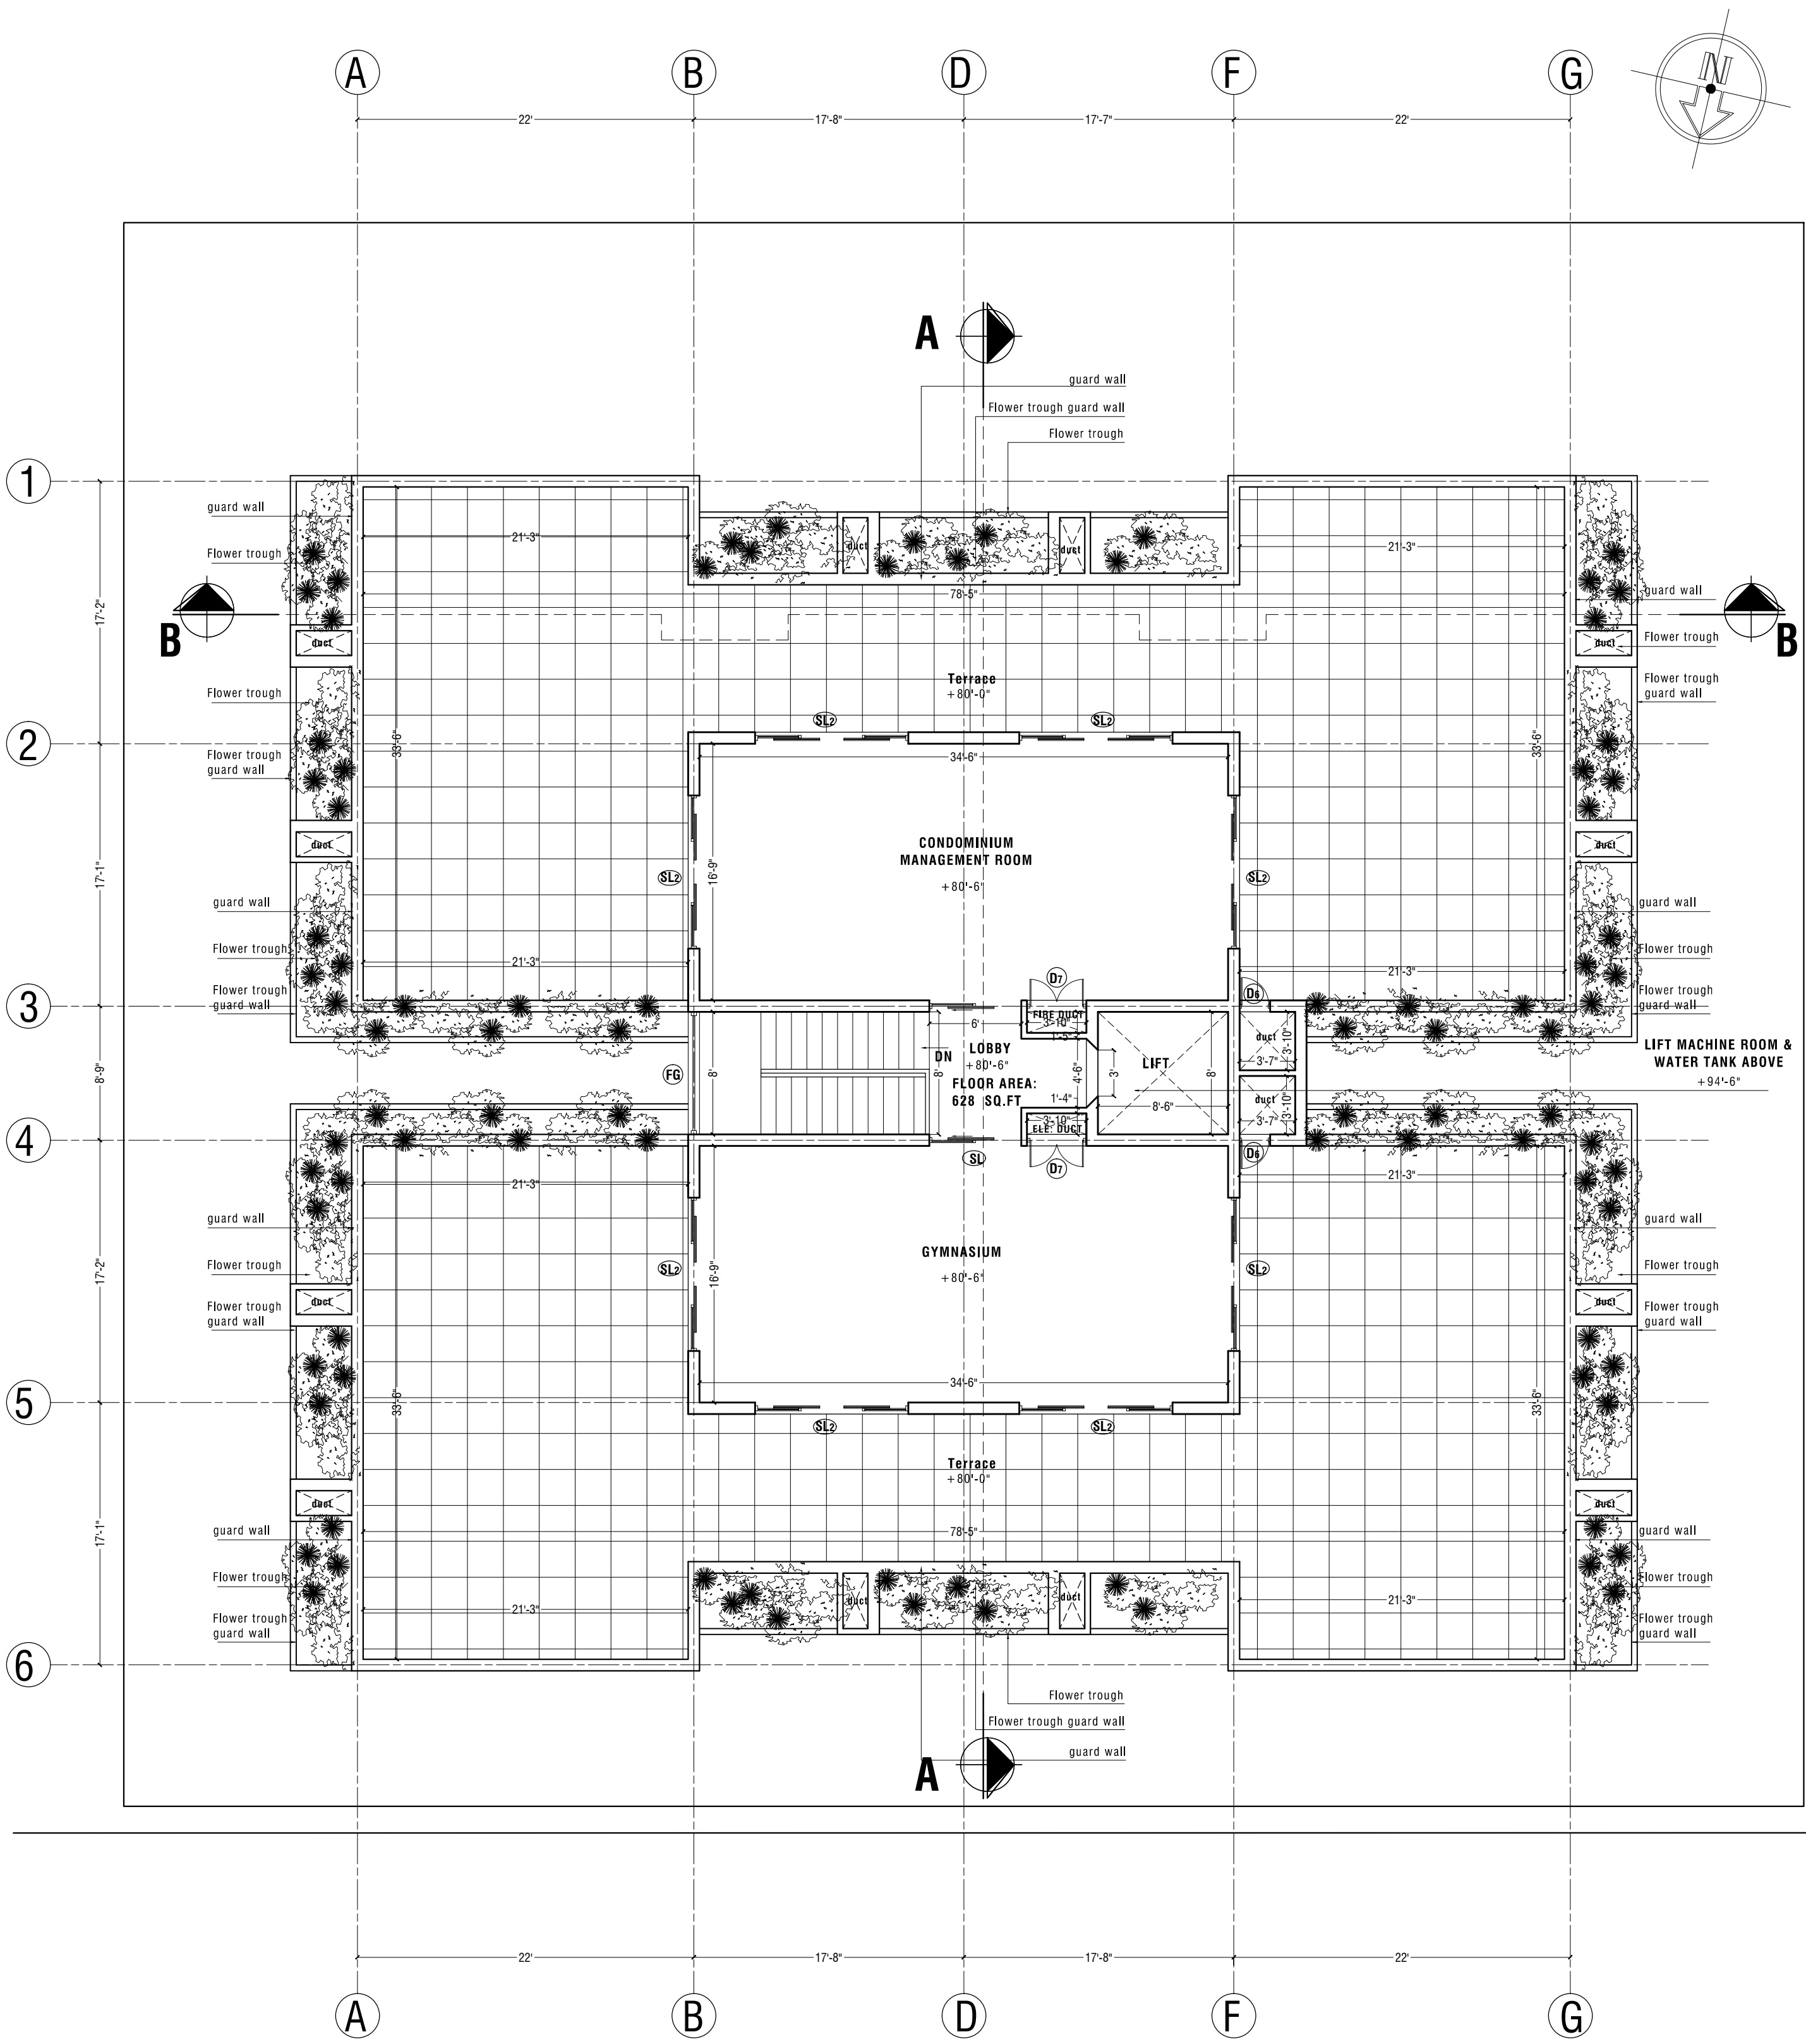


ROOF TERRACE PLAN
SCALE : EIGHT FEET TO AN INCH
FLOOR AREA : 1 491 SQ.FT
ROOF TERRACE AREA: 3 840 SQ.FT
FLOWER TROUGH AREA: 996 SQ.FT

ARCHITECT'S SIGNATURE

ENGINEER'S SIGNATURE

APPLICANT'S SIGNATURE

C O U N C I L D R A W I N G - B L O C K 0 2					DRAWN BY NISHATHA					PROJECT- PROPOSED APARTMENT BUILDING FOR PRIME HOMES (PVT) LTD. NO:75, D.S SENANAYAKA ROAD, COLOMBO 08. AT LOT NO: MATHEGODA.					
DRAWING TITLE: PROPOSED APARTMENT COMPLEX AT MATHEGODA.					DATE 2017-08-31										
02 BED ROOM APARTMENT -ROOF TERRACE PLAN					SCALE EIGHT FEET TO AN INCH										
DWG NO: PRIME LAND/MATHEGODA/COUNCIL/02 BED ROOM APARTMENT -ROOF TERRACE PLAN/AR /04					PAGE NO: 04	CHECKED ANIL KUMARAGE									
					PAPER SIZE -A2	REVISION									
ANIL KUMARAGE, CHARTERED ARCHITECTS, 409/2,3rd Lane, RoBUR:t Gunawardana Mawatha, Battaramulla, Sri Lanka. Tel- 0714811625, 011-2868803. Email- akarchiteam@gmail.com. Fax- 0112868803. All Designs and Drawings are the property of Anil Kumarage, and cannot be copied or used in any way without expressed permission.															

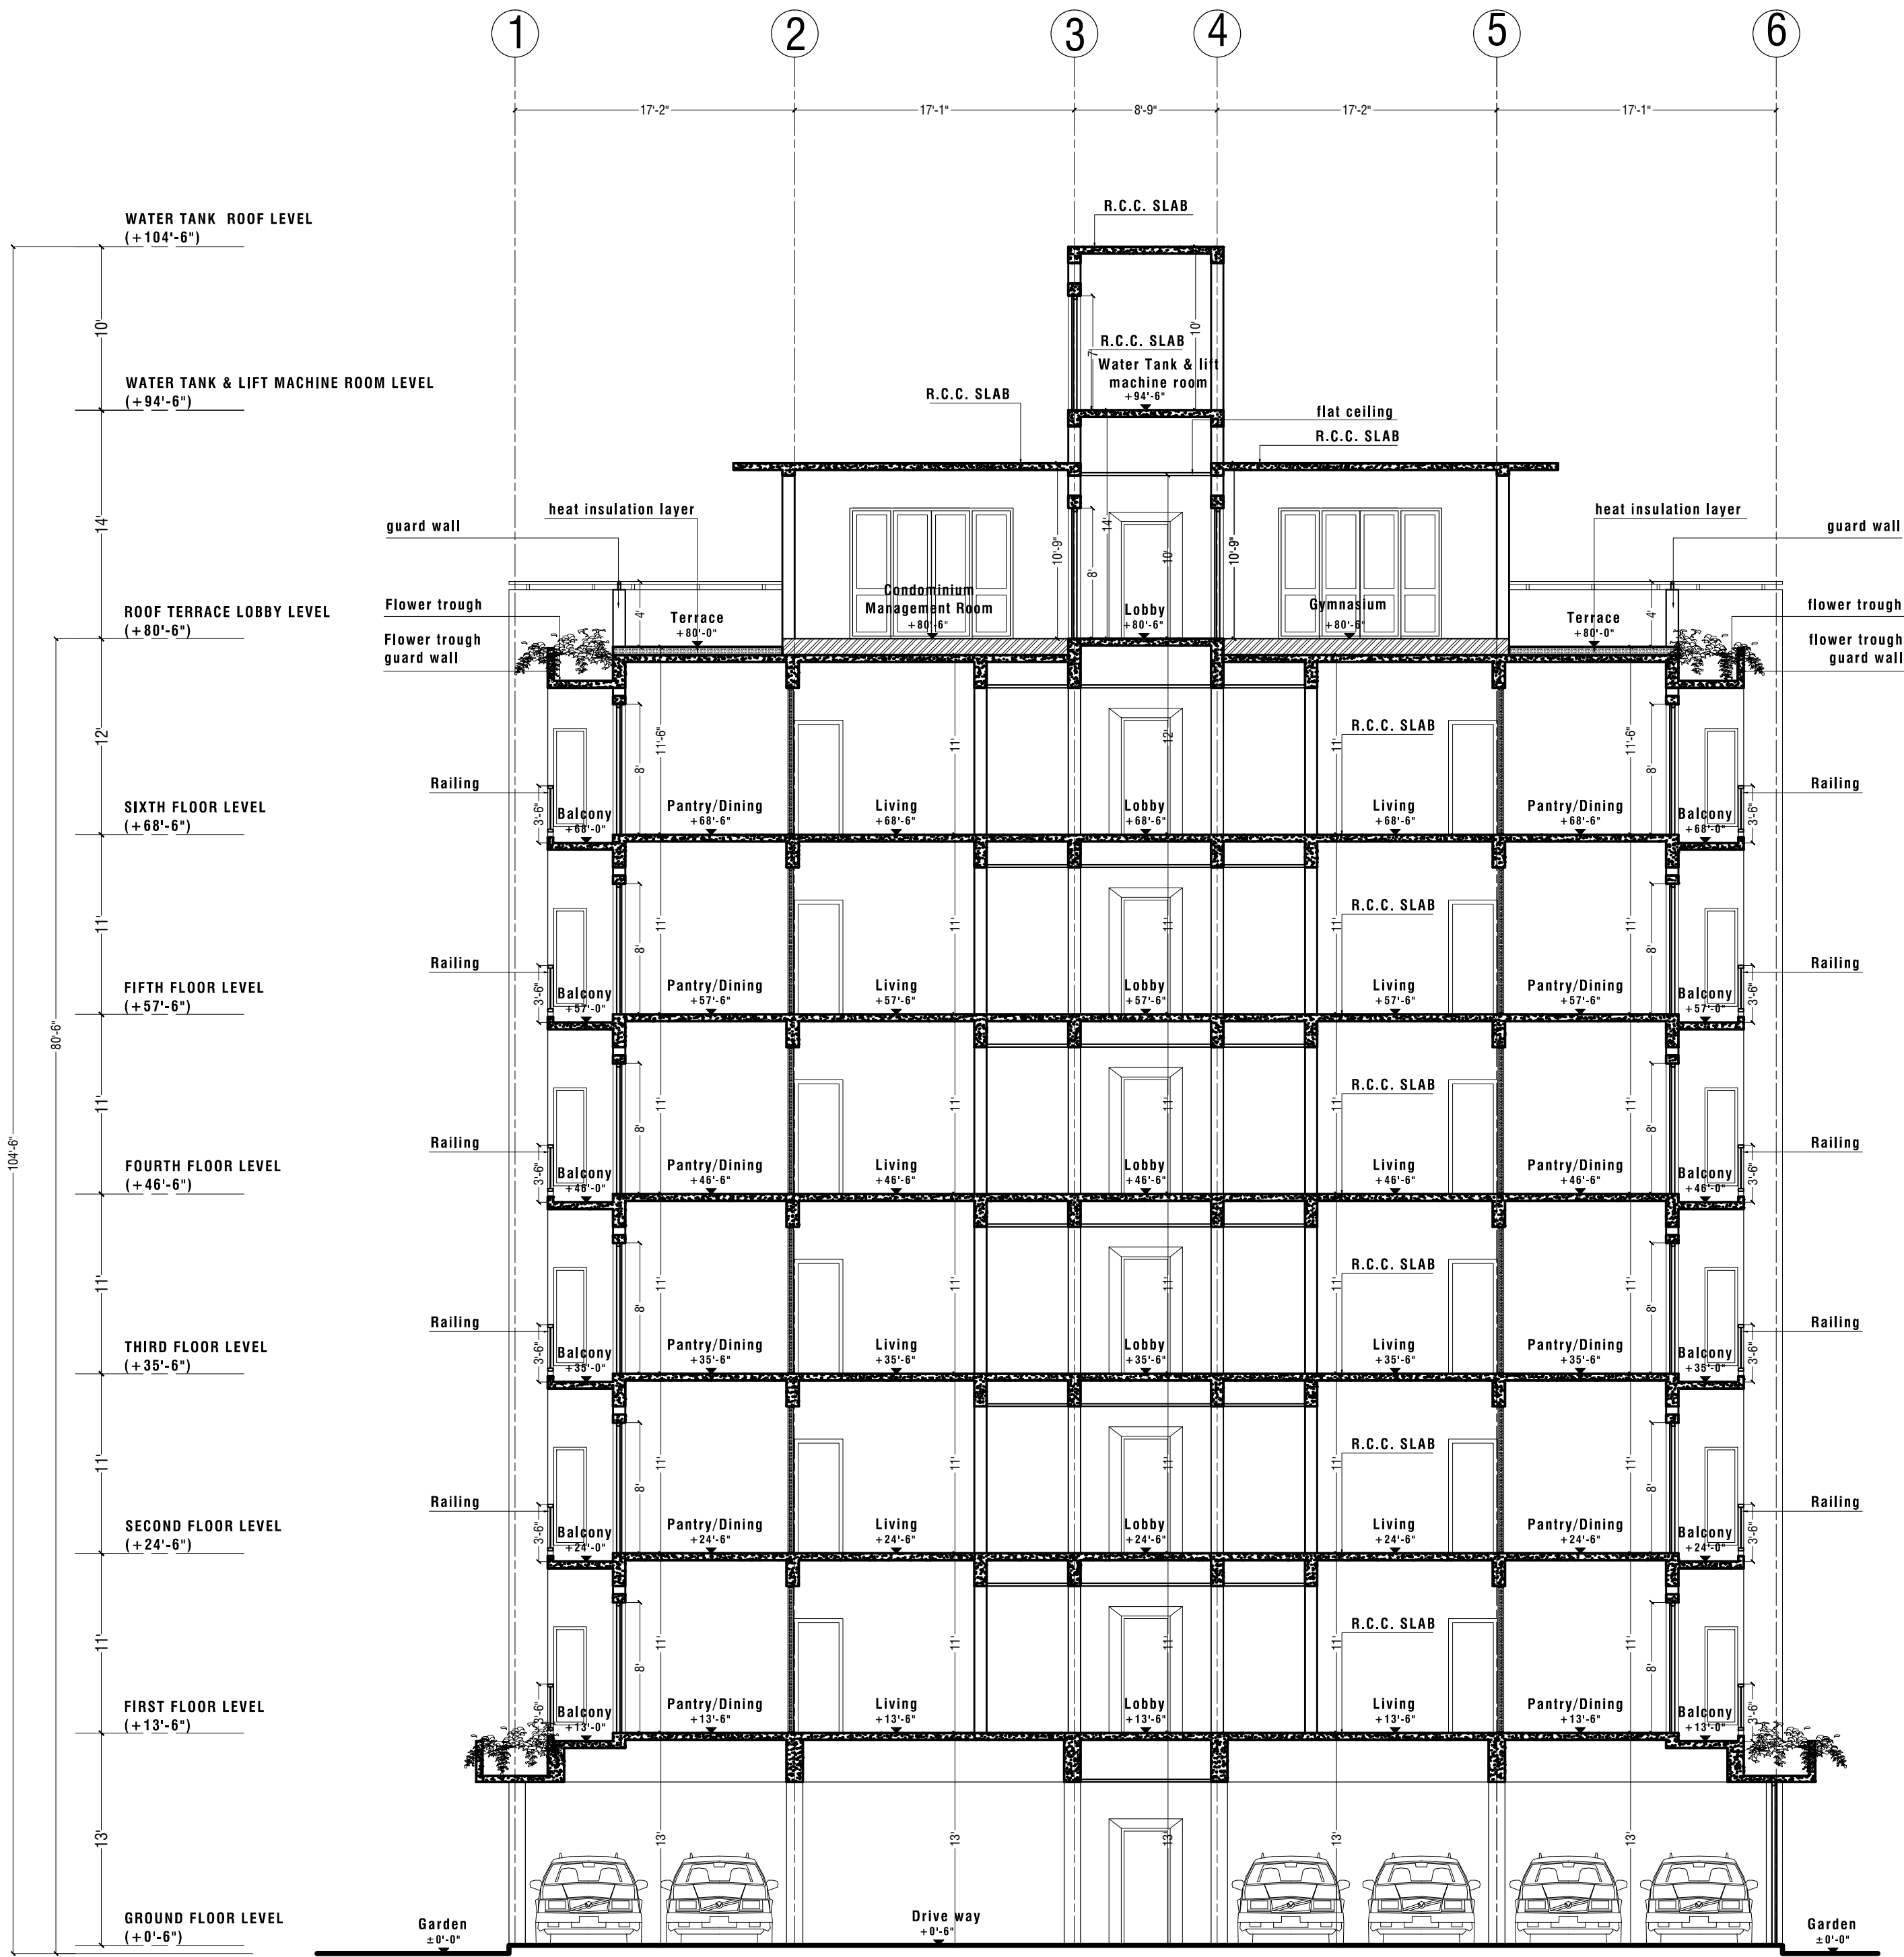

SECTIONAL ELEVATION A-A

SCALE : EIGHT FEET TO AN INCH

ARCHITECT'S SIGNATURE

ENGINEER'S SIGNATURE

APPLICANT'S SIGNATURE

C O U N C I L D R A W I N G - B L O C K 0 2

DRAWING TITLE: PROPOSED APARTMENT COMPLEX AT MATHEGODA.
02 BED ROOM APARTMENT -SECTIONAL ELEVATION A-A

DWG NO:
PRIME LAND/MATHEGODA/COUNCIL/02 BED ROOM APARTMENT -SECTIONAL ELEVATION A-A/AR/06

PAGE NO: 06

PAPER SIZE -A2

DRAWN BY NISHATHA

DATE 2017-08-31

SCALE EIGHT FEET TO AN INCH

CHECKED ANIL KUMARAGE

REVISION


PROJECT-

PROPOSED APARTMENT BUILDING
FOR PRIME HOMES (PVT) LTD.

NO:75, D.S SENANAYAKA ROAD,
COLOMBO 08.

AT LOT NO:
MATHEGODA.

ANIL KUMARAGE, CHARTERED ARCHITECTS, 409/2,3rd Lane, RoBUR:t Gunawardana Mawatha, Battaramulla, Sri Lanka.
Tel- 0714811625, 011-2868803. Email- akarchileam@gmail.com. Fax- 0112868803. All Designs and Drawings are the property of Anil Kumarage, and cannot be copied or used in any way without expressed permission.

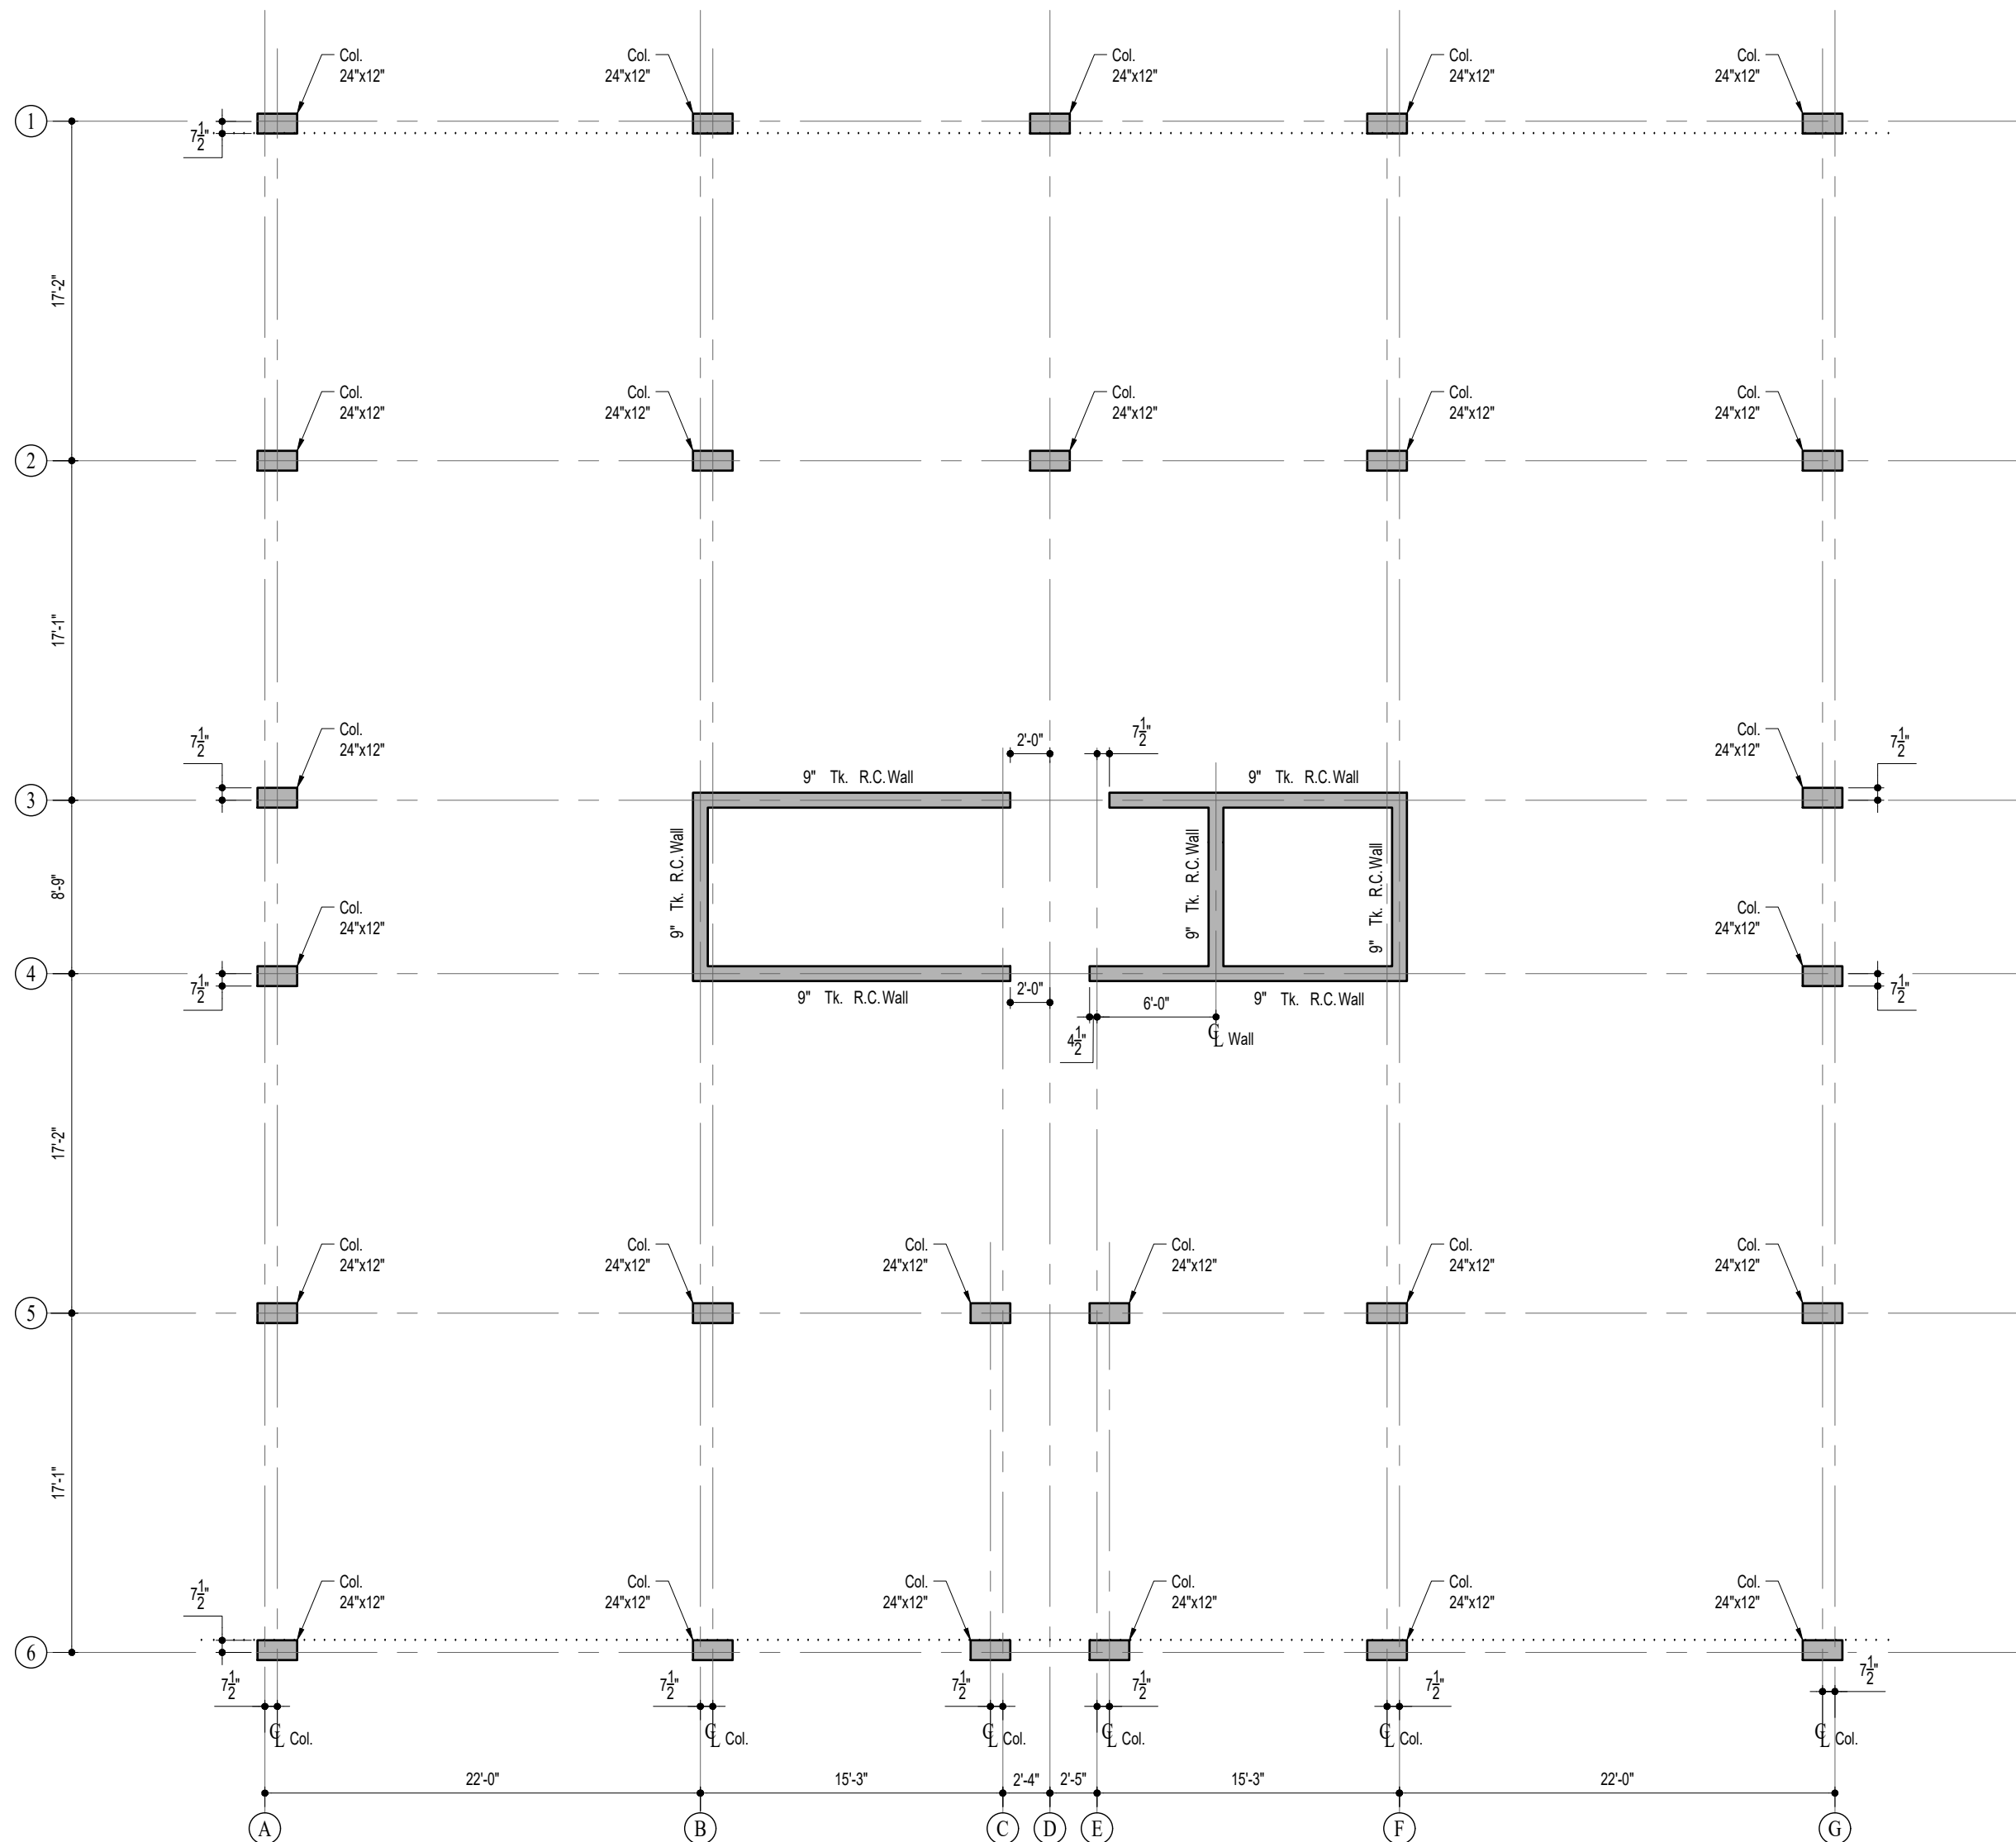



GENERAL ARRANGEMENT OF COLUMNS & WALLS
UPTO 1st FLOOR
Scale: 1/8" = 1' 0"

- NOTES :-**
- FOR GENERAL NOTES REFER DRAWING 16003-S01
 - FOR TYPICAL DETAILS REFER DRAWINGS 16003-S02.1, 16003-S02.2 AND 16003-S02.3.
 - THIS DRAWING IS TO BE READ IN CONJUNCTION WITH ALL RELEVANT ARCHITECTURAL AND ENGINEERING DRAWINGS AND SPECIFICATIONS.
 - NO CONCRETE IS TO BE POURED UNTIL THE REINFORCEMENT HAS BEEN INSPECTED AND APPROVED BY THE ENGINEER.

- UNLESS OTHERWISE SPECIFIED :-**
- COLUMNS ARE SYMMETRICAL ABOUT GIRD/CENTRE LINES.





- CONCRETE GRADE :-**
- COLUMNS - AS PER COLUMN R/F DRAWING

CLIENT PRIME LANDS RESIDENCIES (PVT) LTD, NO. 75, D.S. SENANAYAKE MAWATHA COLOMBO 08.	CONSULTANT  CIVIL AND STRUCTURAL ENGINEERING CONSULTANTS(PVT)LTD. 64, BARNES PLACE, COLOMBO-07, SRI LANKA. T +94 112 683 979 F +94 718 802 859 E mail - contact@csec.lk Web - www.csec.lk	KEY PLAN	REVISION	DESCRIPTION	DATE	BY	PROJECT PROPOSED APARTMENT COMPLEX AT MATHEGODA - 03 BED ROOM APARTMENT		DRAWING TITLE GENERAL ARRANGEMENT OF COLUMNS (UPTO 1st FLOOR)			
							DESIGNED : Eng. Dilina Hettiarachchi	DESIGN CHECKED : SH	DATE 14-08-2017	SHEET No	SCALE AS GIVEN	SHEET SIZE A2
							DRAWN : 	DRAFTING CHECKED : TE	PROJECT No 17057	17057-SXX	REVISION R0	ISSUE 1
							APPROVED : Eng. SHROMAL FERNANDO	FILE NAME, PATH AND OTHER INFO.				


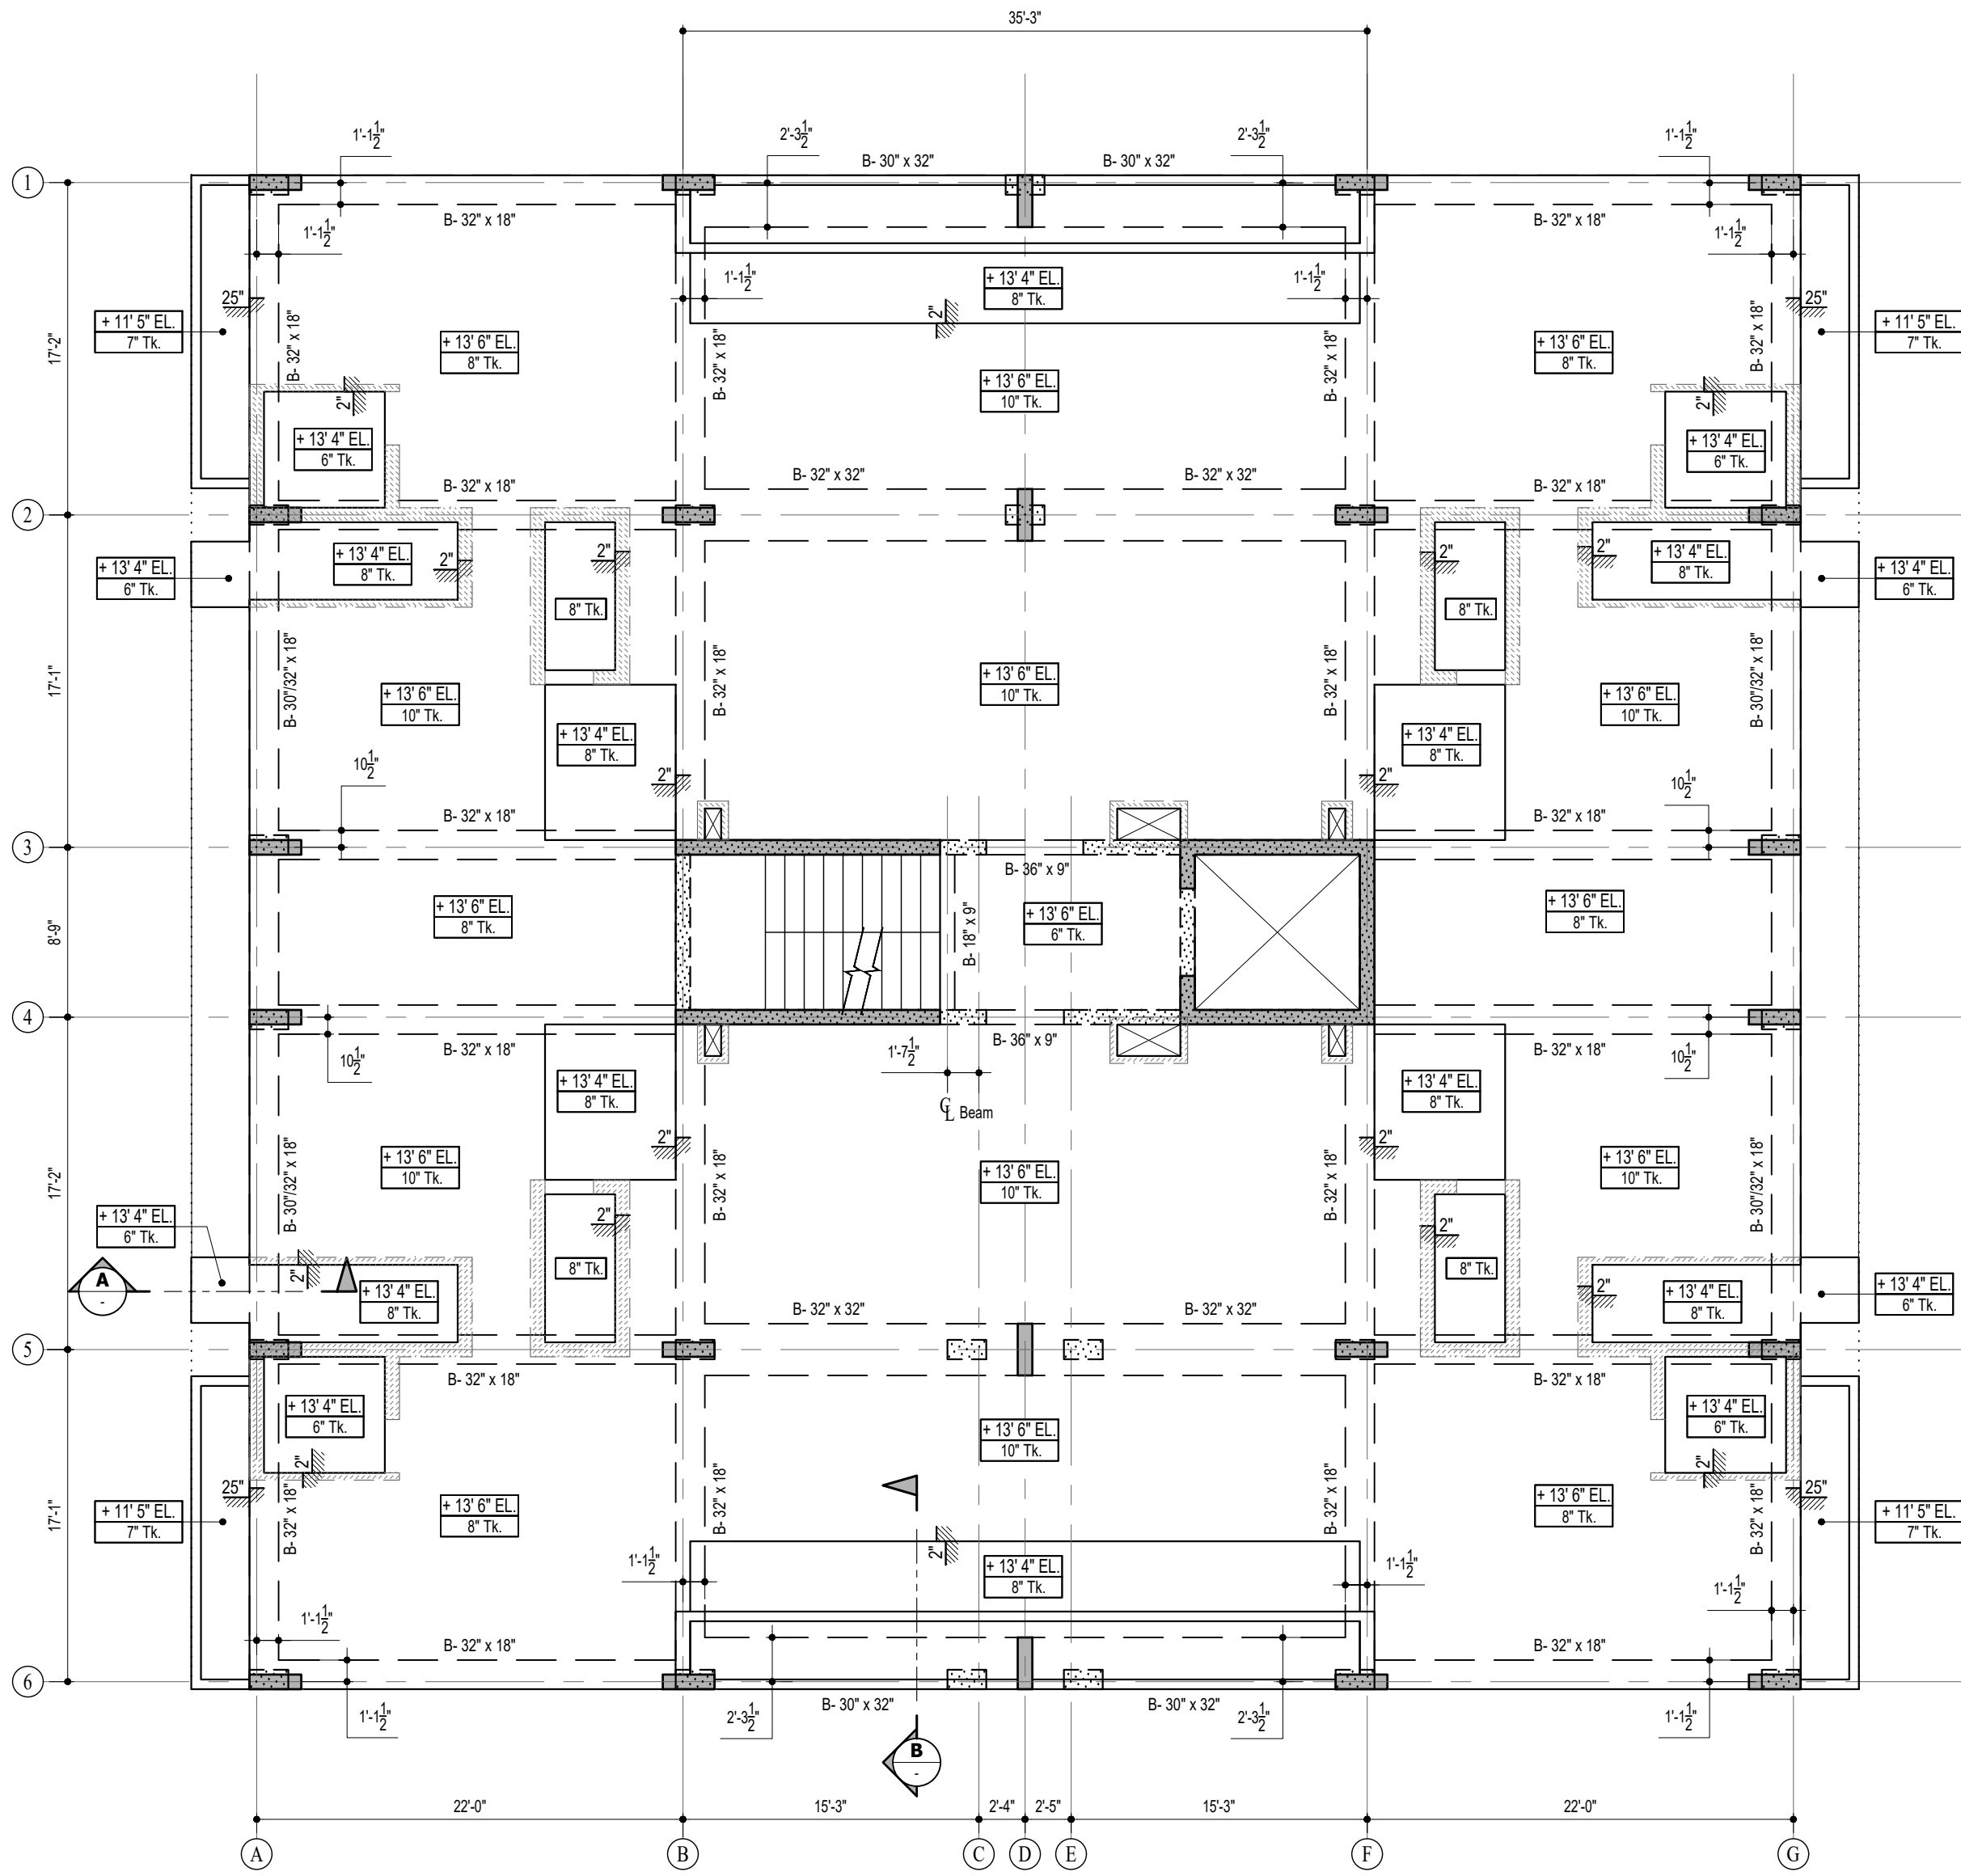


**GENERAL ARRANGEMENT OF 1st FLOOR
TRANSFER FLOOR**
Scale: 1/8" = 1' 0"

8" HIGH KERB AS PER
WALL THICKNESS (4" MIN.)

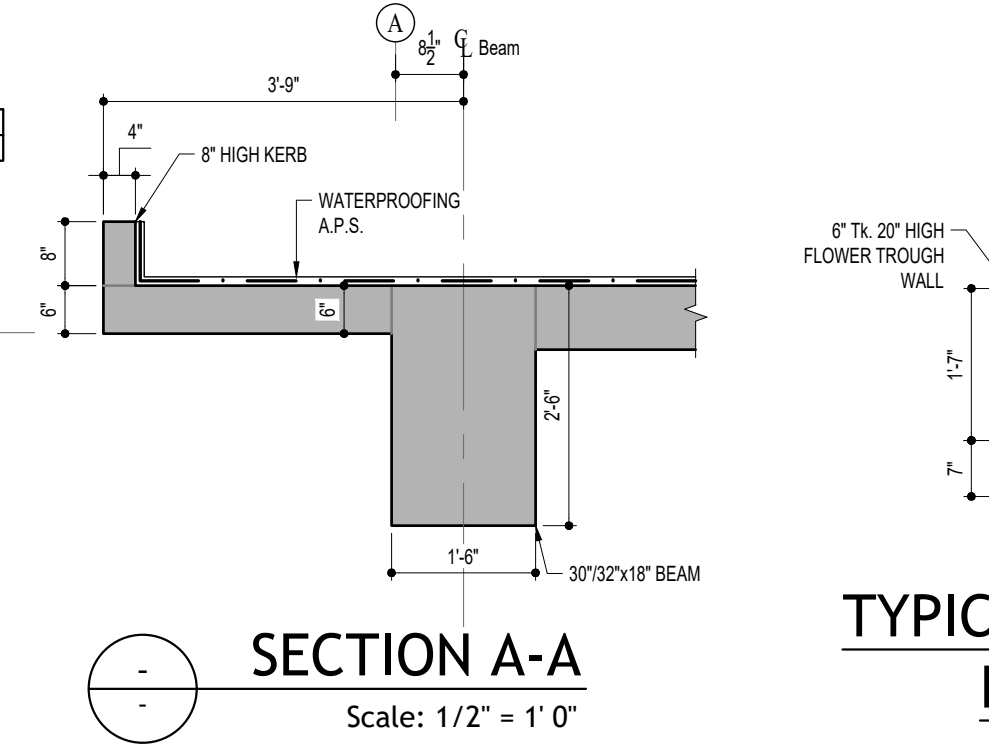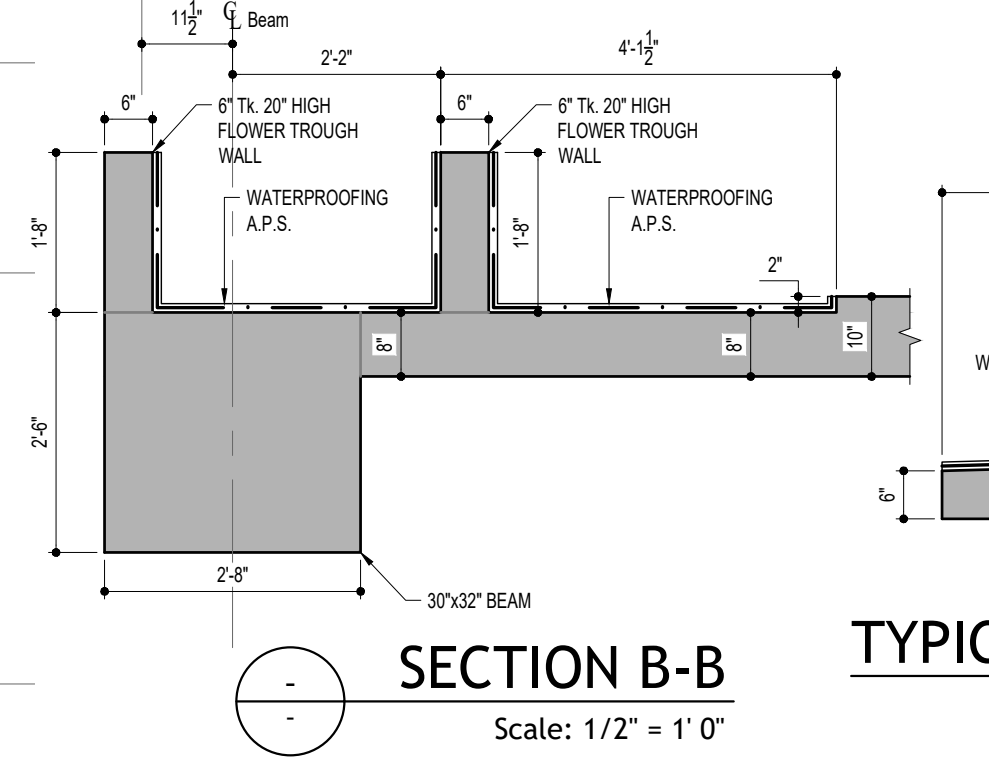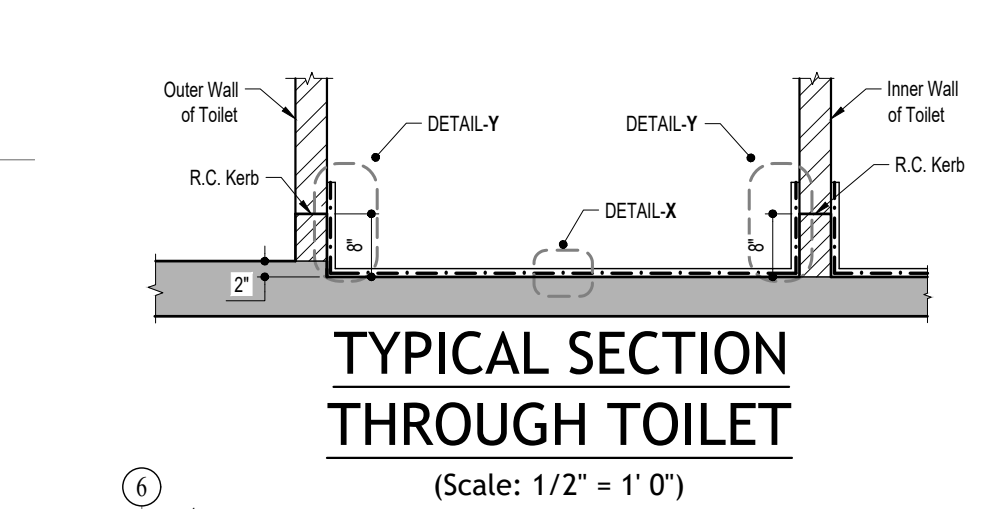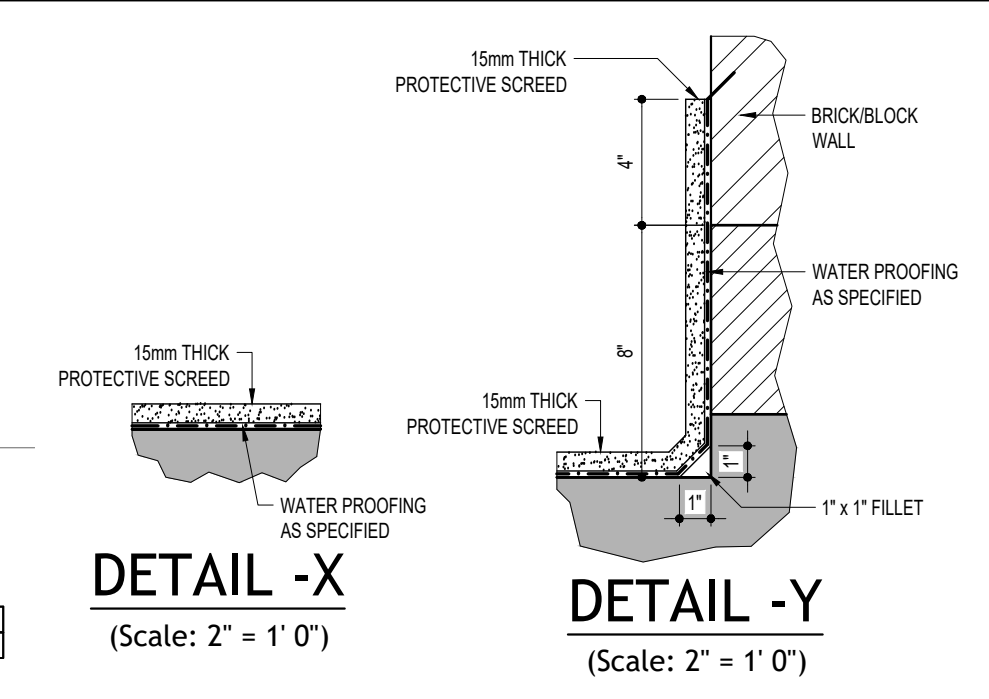

- NOTES :-**
- FOR GENERAL NOTES REFER DRAWING 16003-S01
 - FOR TYPICAL DETAILS REFER DRAWINGS 16003-S02.1, 16003-S02.2 AND 16003-S02.3.
 - THIS DRAWING IS TO BE READ IN CONJUNCTION WITH ALL RELEVANT ARCHITECTURAL AND ENGINEERING DRAWINGS AND SPECIFICATIONS.
 - NO CONCRETE IS TO BE POURED UNTIL THE REINFORCEMENT HAS BEEN INSPECTED AND APPROVED BY THE ENGINEER.
 - WATER PROOFING AS SPECIFIED TO BE APPLIED ON ALL WATER RETAINING AND EXCLUDING SURFACES.
 - SLAB OPENINGS' SIZE AND POSITION TO BE CHECKED WITH ARCHITECTURAL AND M&E DRAWINGS.
 - FOR COLUMN SIZES REFER COLUMN LAYOUT(16003-Sxx)
- UNLESS OTHERWISE SPECIFIED :-**
- KERB HEIGHT AT THE TOILET DOORS TO ARCHITECT'S DETAIL.
 - WALLS AROUND DUCTS TO BE AS PER ARCHITECTURAL DRAWINGS.
 - ALL TOILETS/BALCONIES/TERRACE FLOORS SHALL BE SLOPED TO THE GULLIES AND SMOOTHLY FINISHED TO RECEIVE THE WATERPROOFING.
 - BEAMS ARE SYMMETRICAL ABOUT GIRD/CENTRE LINES.

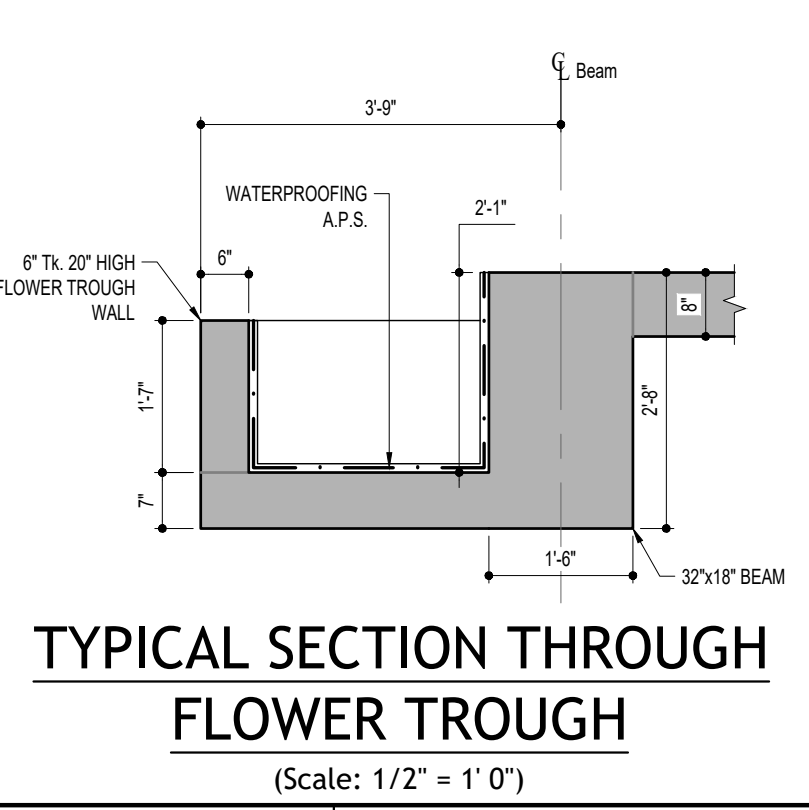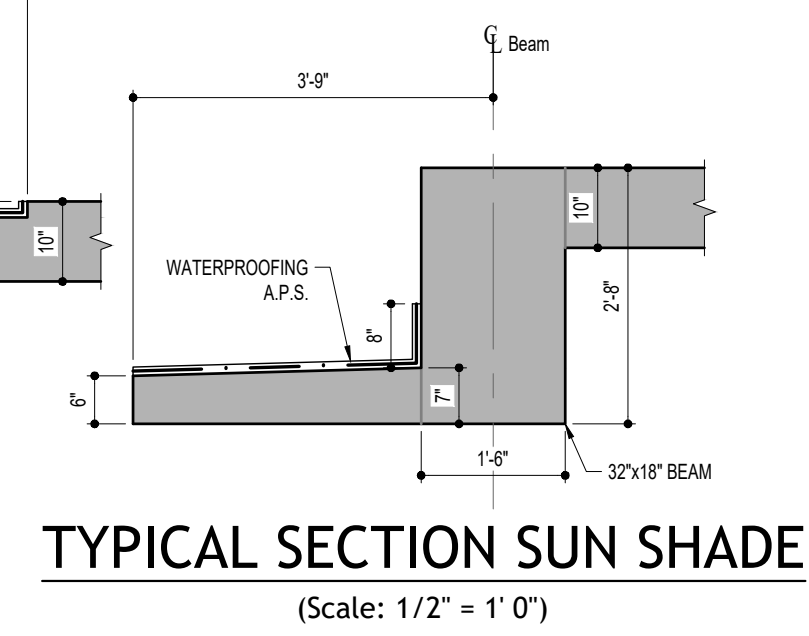

CLIENT PRIME LANDS RESIDENCIES (PVT) LTD, NO. 75, D.S. SENANAYAKE MAWATHA COLOMBO 08.	CONSULTANT  CIVIL AND STRUCTURAL ENGINEERING CONSULTANTS(PVT)LTD. 64, BARNES PLACE, COLOMBO-07, SRI LANKA. T +94 112 683 979 F +94 718 802 859 E mail - contact@csec.lk Web - www.csec.lk	KEY PLAN	REVISION	DESCRIPTION	DATE	BY	PROJECT	DRAWING TITLE				
							PROPOSED APARTMENT COMPLEX AT	GENERAL ARRANGEMENT OF 1st FLOOR				
							MATHEGODA -	(TRANSFER FLOOR)				
							03 BED ROOM APARTMENT					
							DESIGNED : Eng. Dilina Hettiarachchi	DESIGN CHECKED : SH	DATE	SHEET No	SCALE	SHEET SIZE
							DRAWN : 	DRAFTING CHECKED : TE	14-08-2017	17057-SXX	AS GIVEN	A2
							PROJECT No	FILE NAME, PATH AND OTHER INFO.			REVISION	ISSUE
							APPROVED : Eng. SHIROMAL FERNANDO		17057		R0	1

NOTES :-


- FOR GENERAL NOTES REFER DRAWING 16003-S01
- FOR TYPICAL DETAILS REFER DRAWINGS 16003-S02.1, 16003-S02.2 AND 16003-S02.3.
- THIS DRAWING IS TO BE READ IN CONJUNCTION WITH ALL RELEVANT ARCHITECTURAL AND ENGINEERING DRAWINGS AND SPECIFICATIONS.
- NO CONCRETE IS TO BE POURED UNTIL THE REINFORCEMENT HAS BEEN INSPECTED AND APPROVED BY THE ENGINEER.

UNLESS OTHERWISE SPECIFIED :-

- COLUMNS AND WALLS ARE SYMMETRICAL ABOUT GRID/CENTRE LINES.

CONCRETE GRADE :-

- COLUMNS - AS PER COLUMN R/F DRAWING
- WALLS - AS PER WALL R/F DRAWING

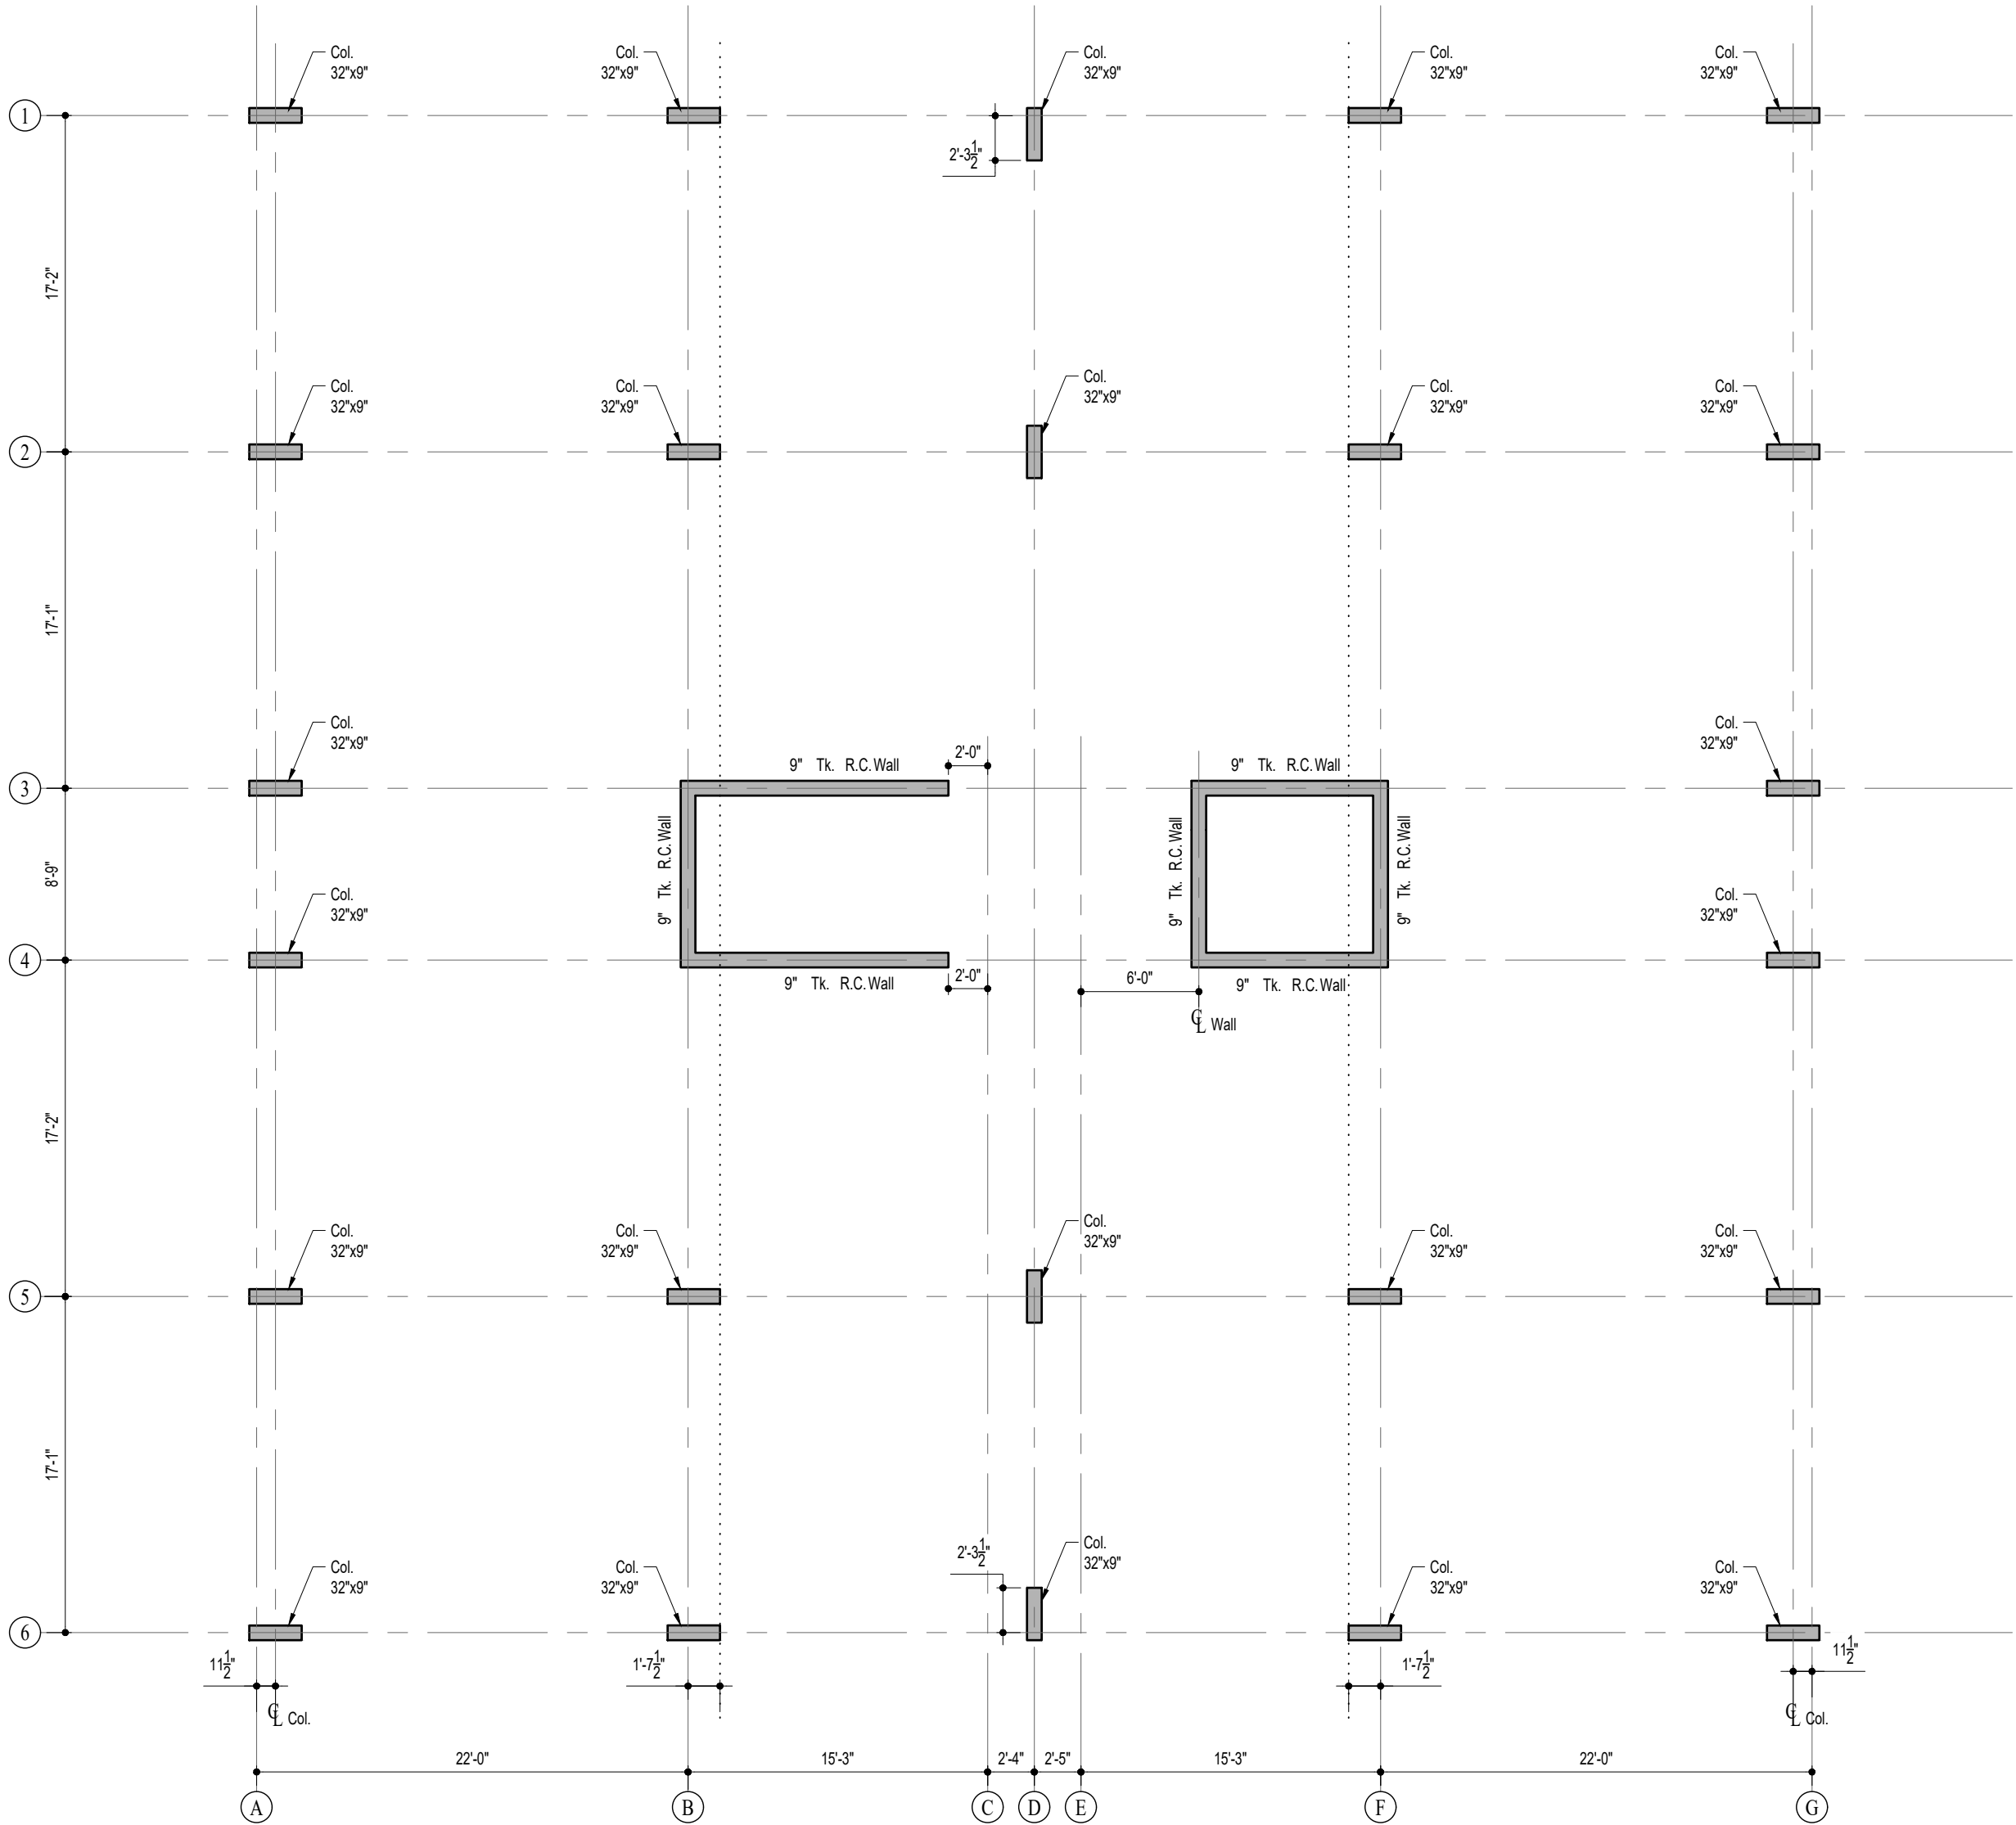

GENERAL ARRANGEMENT OF COLUMNS & WALLS
1st FLOOR UPTO ROOF TERRACE
Scale: 1/8" = 1' 0"

CLIENT
PRIME LANDS RESIDENCIES (PVT) LTD,
NO. 75, D.S. SENANAYAKE MAWATHA
COLOMBO 08.

CONSULTANT
CSEC CIVIL AND STRUCTURAL ENGINEERING
CONSULTANTS(PVT)LTD.
64, BARNES PLACE, COLOMBO-07,
SRI LANKA.
T +94 112 683 979 F +94 718 802 859
E mail - contact@csec.lk Web - www.csec.lk
STRENGTH SERVICEABILITY SAFETY SUSTAINABILITY

KEY PLAN


REVISION	DESCRIPTION	DATE	BY	PROJECT	DRAWING TITLE	DATE	SHEET No	SCALE	SHEET SIZE
				PROPOSED APARTMENT COMPLEX AT MATHEGODA - 03 BED ROOM APARTMENT	GENERAL ARRANGEMENT OF COLUMNS & WALLS (1st FLOOR UPTO ROOF TERRACE)	14-08-2017	17057-SXX	AS GIVEN	A2
				DESIGNED : Eng. Dilina Hettiarachchi	DESIGN CHECKED : SH				
				DRAWN : Suman	DRAFTING CHECKED : TE				
				APPROVED : Eng. SHIROMAL FERNANDO	FILE NAME, PATH AND OTHER INFO.	PROJECT No 17057		REVISION R0	ISSUE 1

NOTES :-


- FOR GENERAL NOTES REFER DRAWING 16003-S01
- FOR TYPICAL DETAILS REFER DRAWINGS 16003-S02.1, 16003-S02.2 AND 16003-S02.3.
- THIS DRAWING IS TO BE READ IN CONJUNCTION WITH ALL RELEVANT ARCHITECTURAL AND ENGINEERING DRAWINGS AND SPECIFICATIONS.
- NO CONCRETE IS TO BE POURED UNTIL THE REINFORCEMENT HAS BEEN INSPECTED AND APPROVED BY THE ENGINEER.
- WATER PROOFING AS SPECIFIED TO BE APPLIED ON ALL WATER RETAINING AND EXCLUDING SURFACES.
- SLAB OPENINGS' SIZE AND POSITION TO BE CHECKED WITH ARCHITECTURAL AND M&E DRAWINGS.
- FOR COLUMN SIZES REFER COLUMN LAYOUT(16003-Sxx)

UNLESS OTHERWISE SPECIFIED :-

- KERB HEIGHT AT THE TOILET DOORS TO ARCHITECT'S DETAIL.
- WALLS AROUND DUCTS TO BE AS PER ARCHITECTURAL DRAWINGS.
- ALL TOILETS/BALCONIES/TERRACE FLOORS SHALL BE SLOPED TO THE GULLIES AND SMOOTHLY FINISHED TO RECEIVE THE WATERPROOFING.
- BEAMS ARE SYMMETRICAL ABOUT GRID/CENTRE LINES.

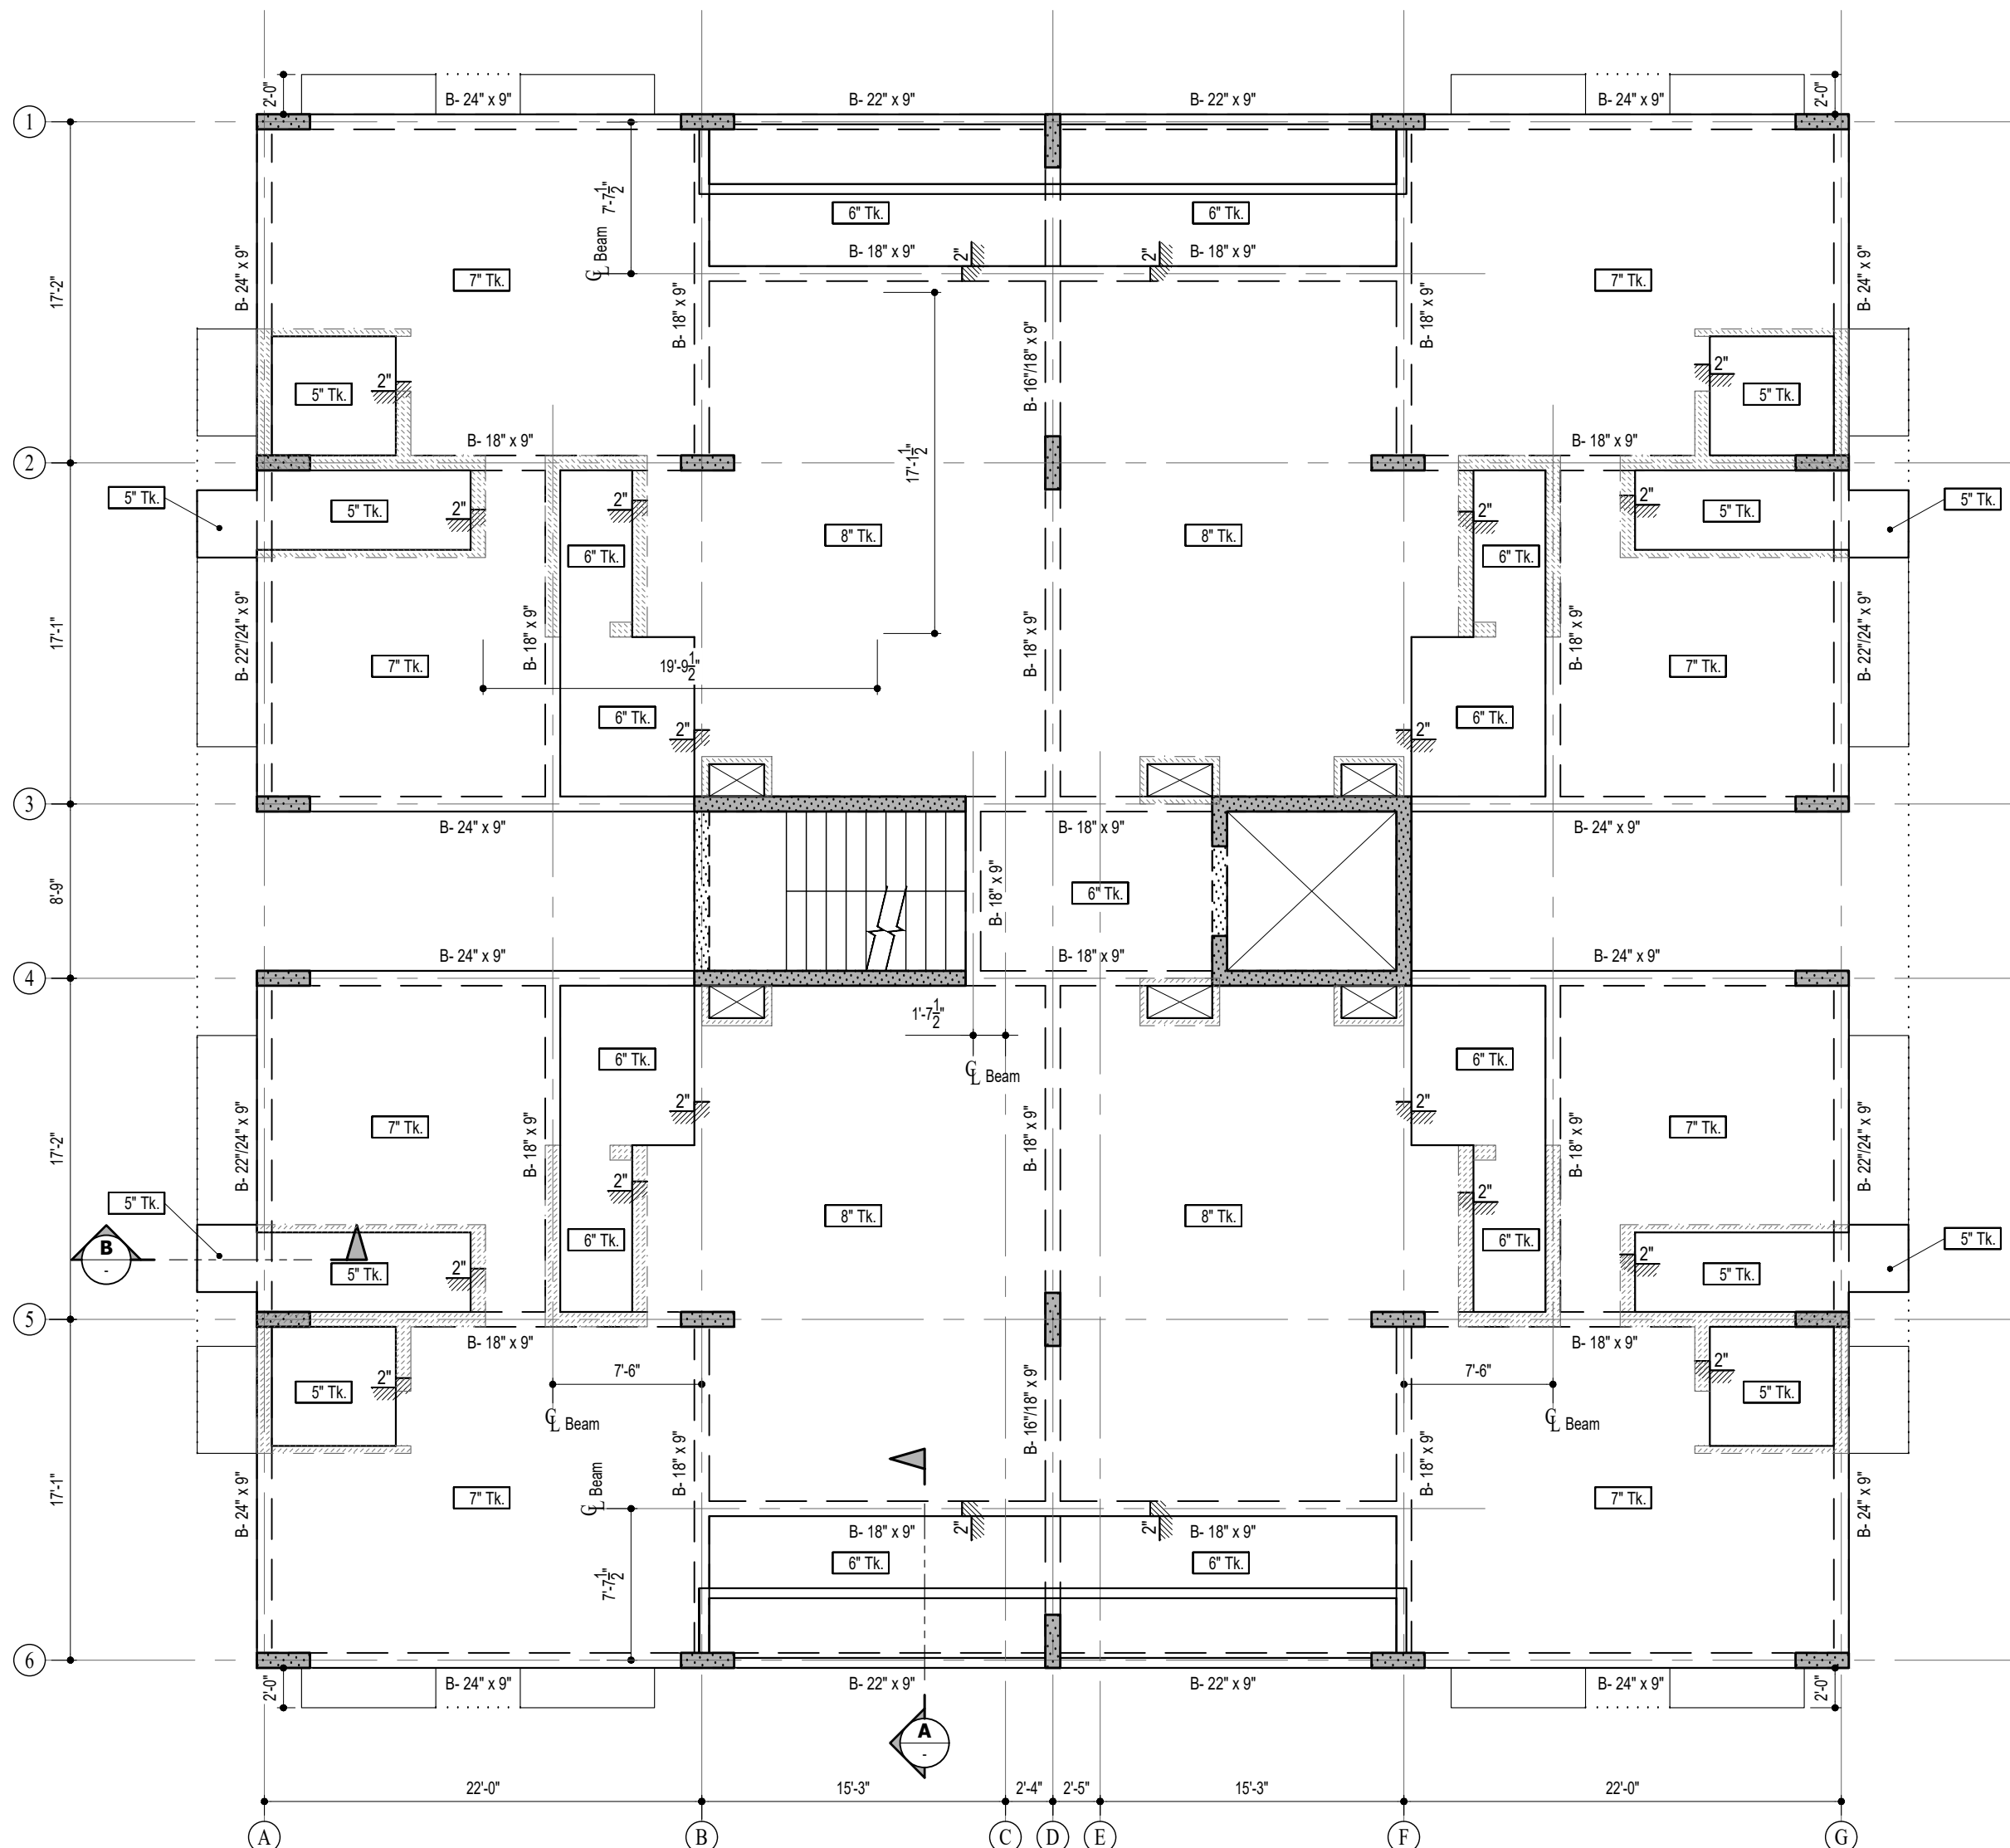


GENERAL ARRANGEMENT OF 2nd FLOOR
TYPICAL UPTO ROOF TERRACE
Scale: 1/8" = 1' 0"

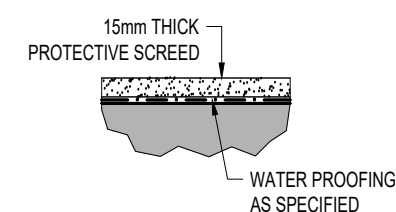


DETAIL -X

(Scale: 2" = 1' 0")

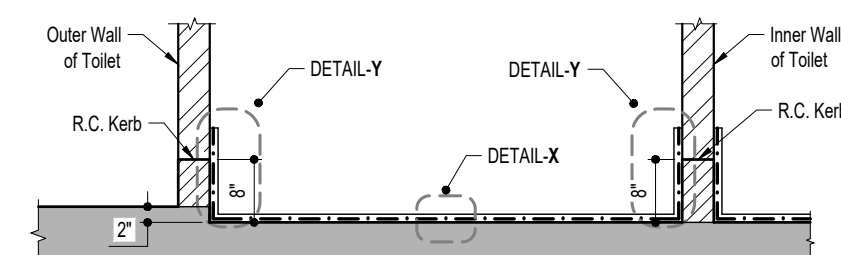


TYPICAL SECTION THROUGH TOILET

(Scale: 1/2" = 1' 0")

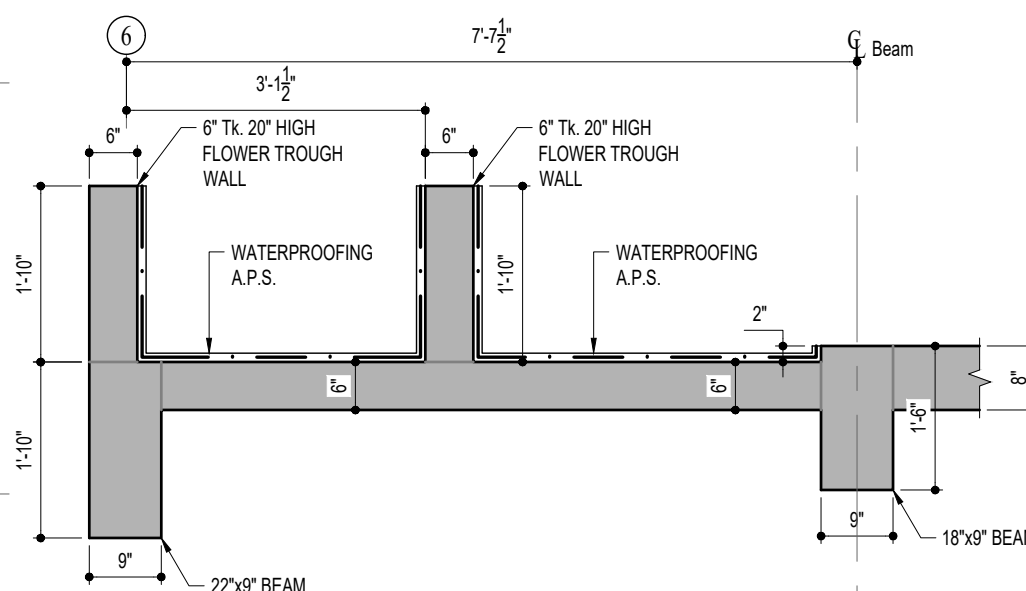


SECTION A-A

Scale: 1/2" = 1' 0"

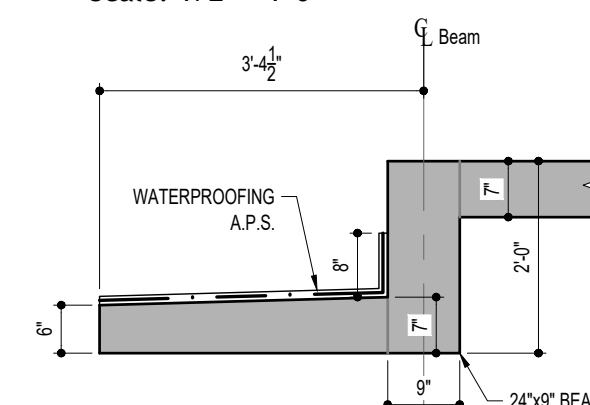


TYPICAL SECTION SUN SHADE

(Scale: 1/2" = 1' 0")

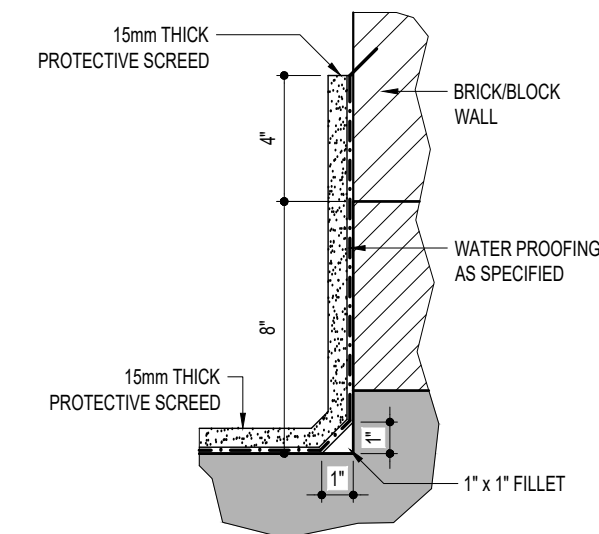

DETAIL -Y

(Scale: 2" = 1' 0")

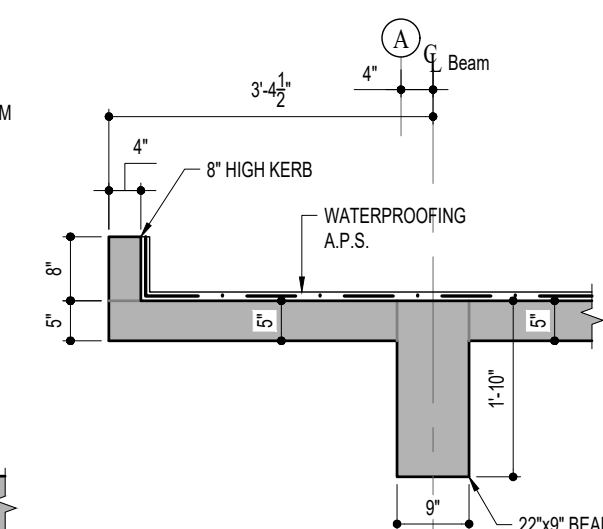

SECTION B-B

Scale: 1/2" = 1' 0"

FLOOR LEVEL	ELEVATION
SECOND FLOOR	+ 24' 6" EL.
THIRD FLOOR	+ 35' 6" EL.
FOURTH FLOOR	+ 46' 6" EL.
FIFTH FLOOR	+ 57' 6" EL.
SIXTH FLOOR	+ 68' 6" EL.

CLIENT
PRIME LANDS RESIDENCIES (PVT) LTD,
NO. 75, D.S. SENANAYAKE MAWATHA
COLOMBO 08.


CONSULTANT
CSE CIVIL AND STRUCTURAL ENGINEERING
CONSULTANTS(PVT)LTD.
64, BARNES PLACE, COLOMBO-07,
SRI LANKA.
T +94 112 683 979 F +94 718 802 859
E mail - contact@csec.lk Web - www.csec.lk

KEY PLAN


REVISION	DESCRIPTION	DATE	BY

PROJECT
PROPOSED APARTMENT COMPLEX AT
MATHEGODA -
03 BED ROOM APARTMENT
DESIGNED : Eng. Dilina Hettiarachchi
DRAWN : **Suman**
APPROVED : Eng. SHROMAL FERNANDO


DRAWING TITLE
GENERAL ARRANGEMENT OF 2nd FLOOR
(TYPICAL UPTO ROOF TERRACE)
DATE
14-08-2017
PROJECT No
17057
SHEET No
17057-SXX
SCALE
AS GIVEN
REVISION
R0
SHEET SIZE
A2
ISSUE
1

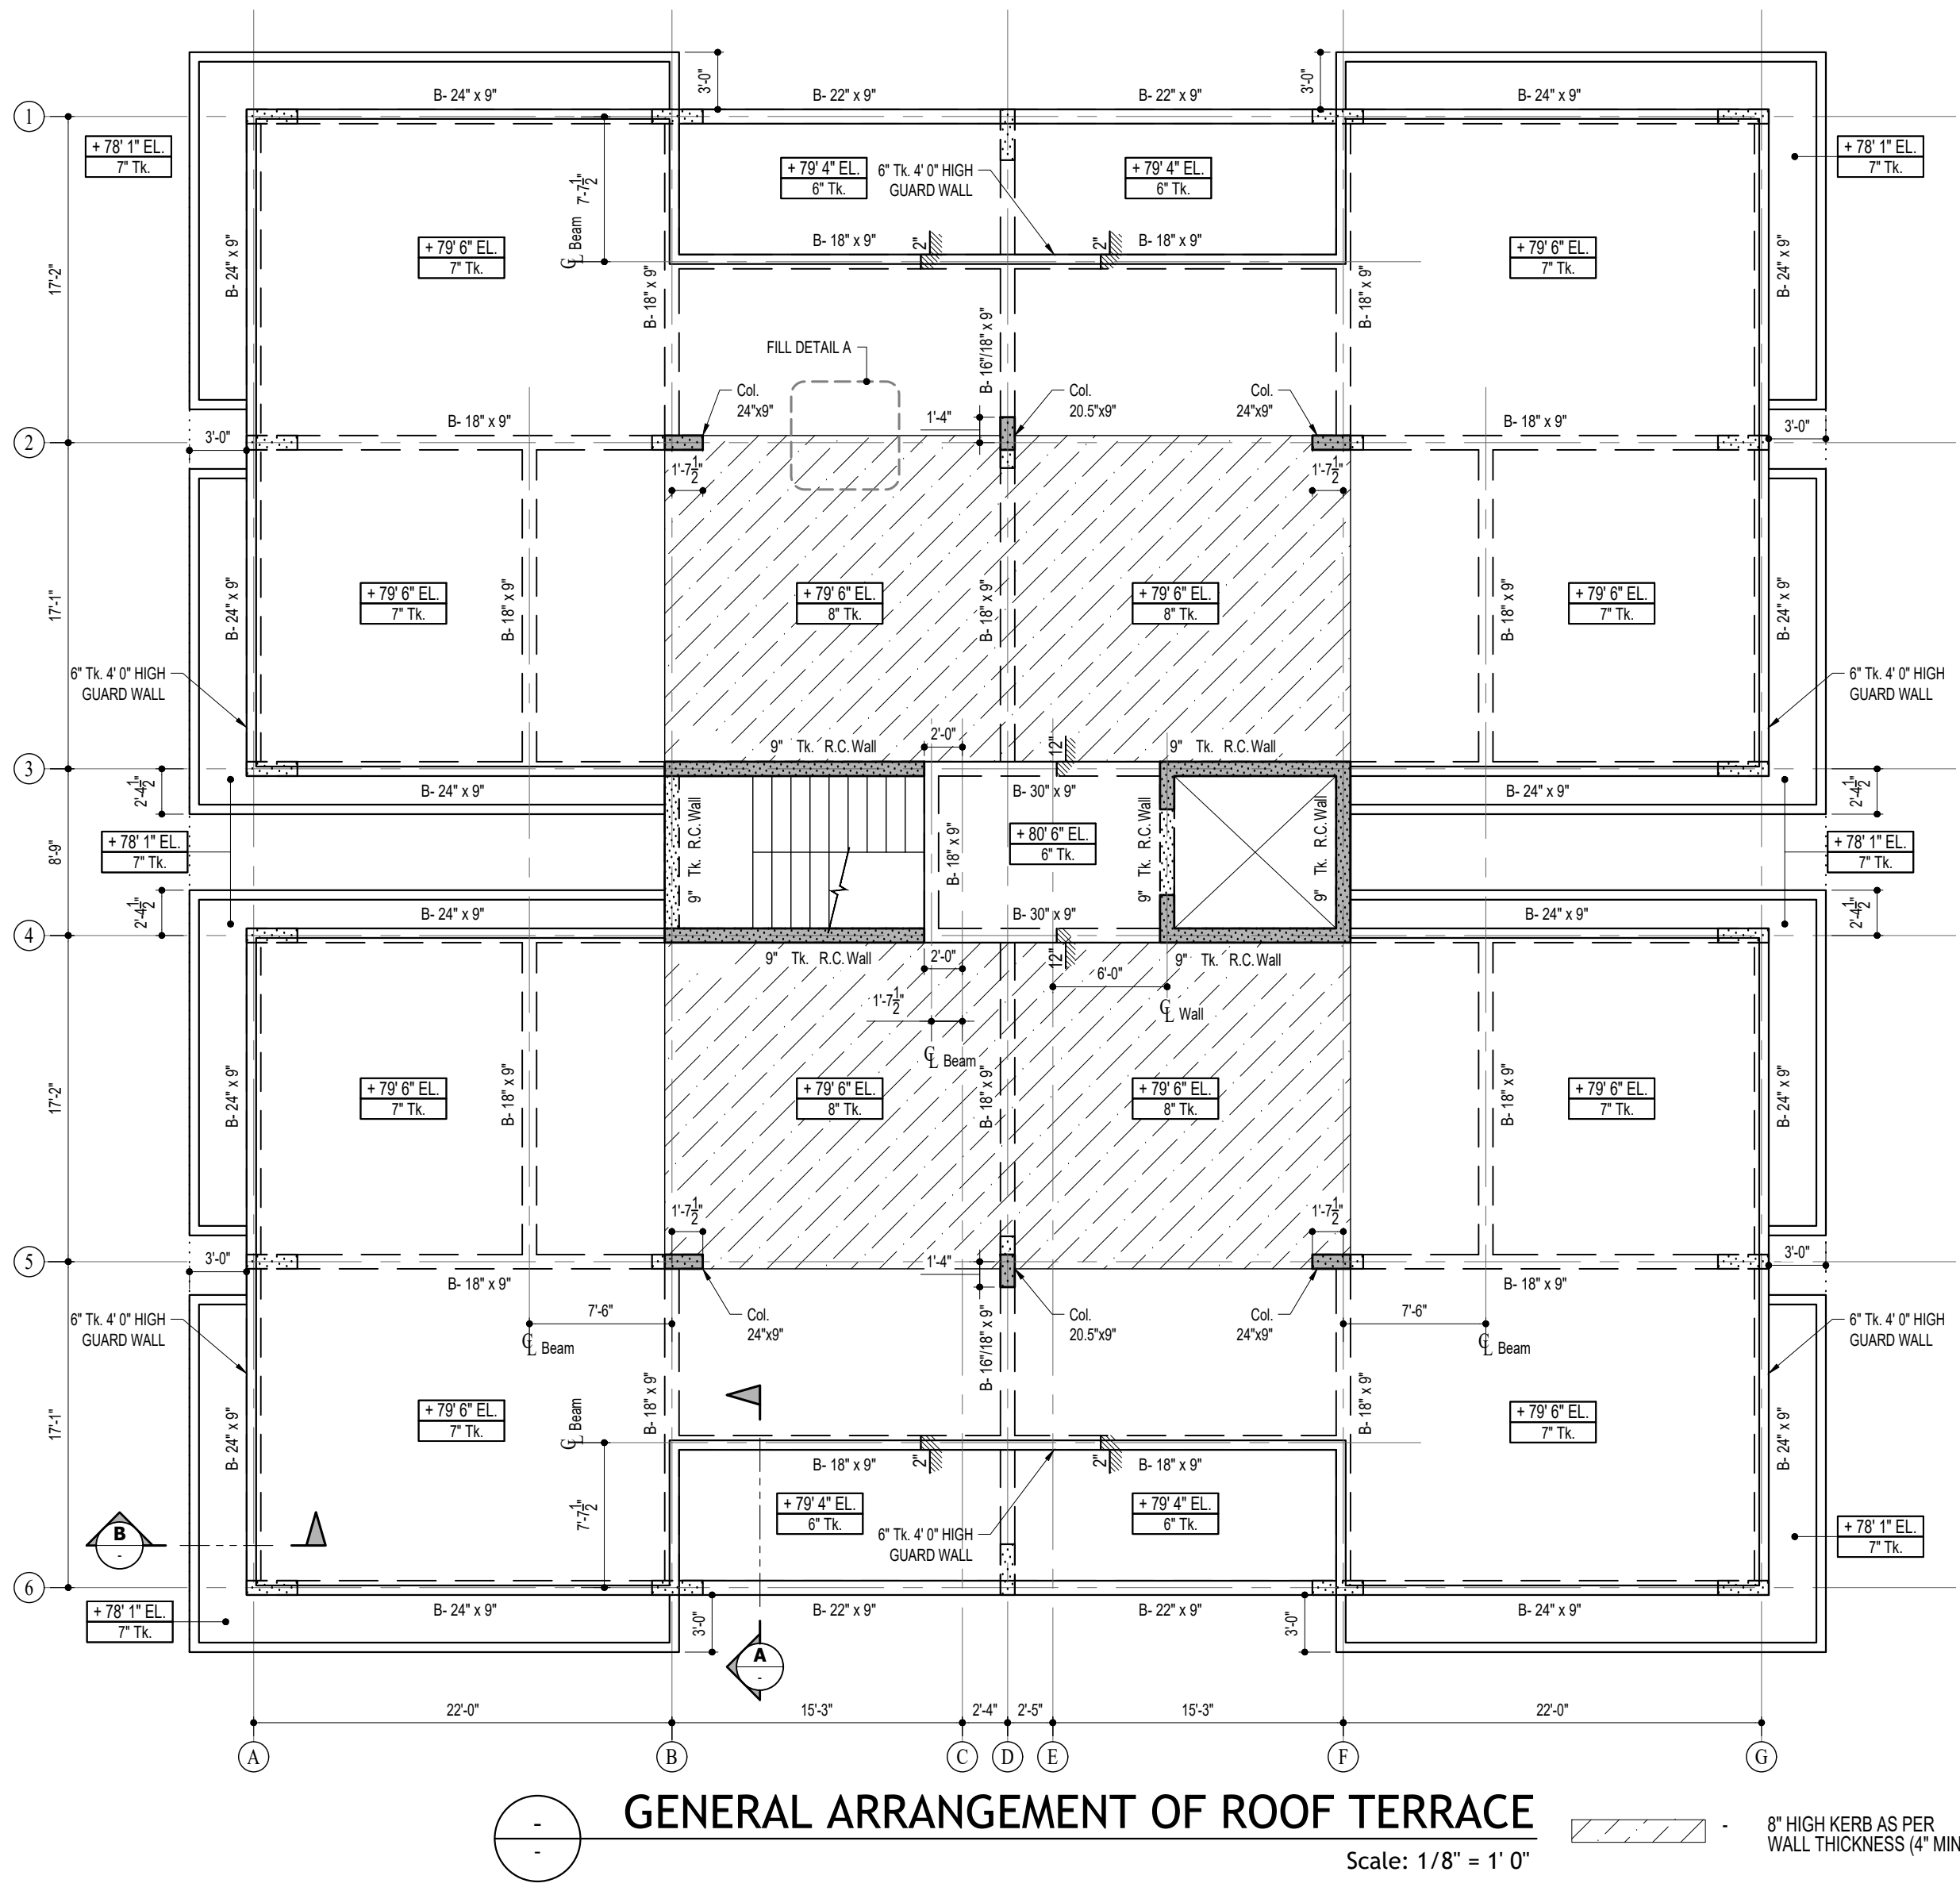


GENERAL ARRANGEMENT OF ROOF TERRACE
Scale: 1/8" = 1' 0"

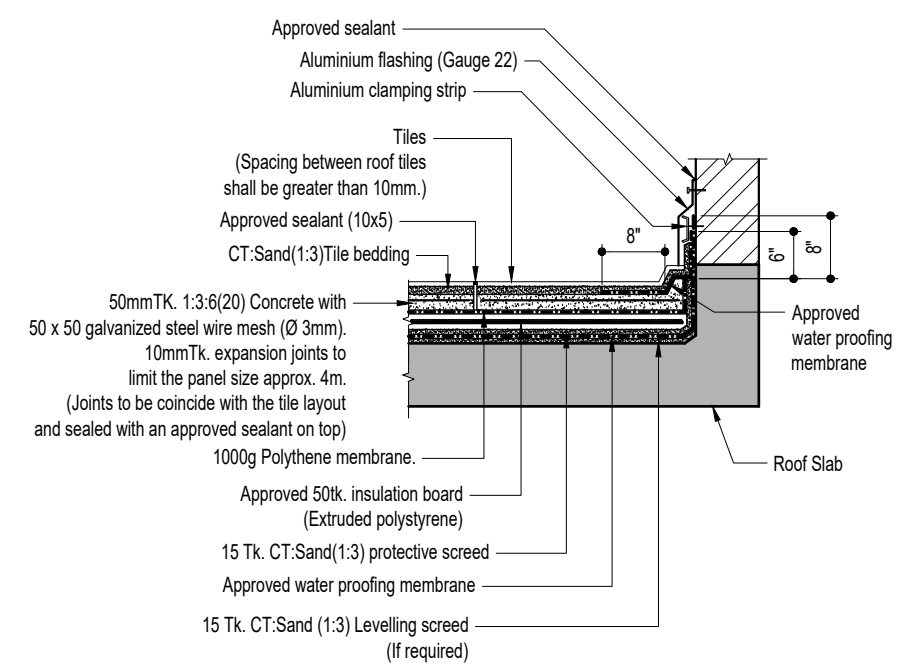


TYPICAL ROOF INSULATION & WATER PROOFING DETAIL
(SCALE: 1'-0" - 1/2")

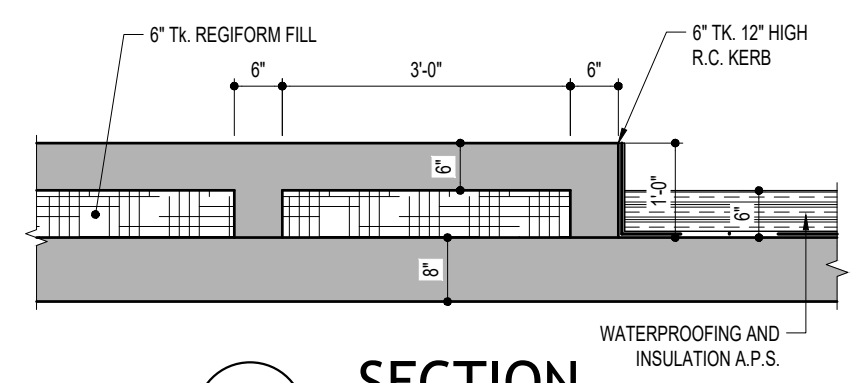

SECTION 1-1
Scale: 1/2" = 1' 0"

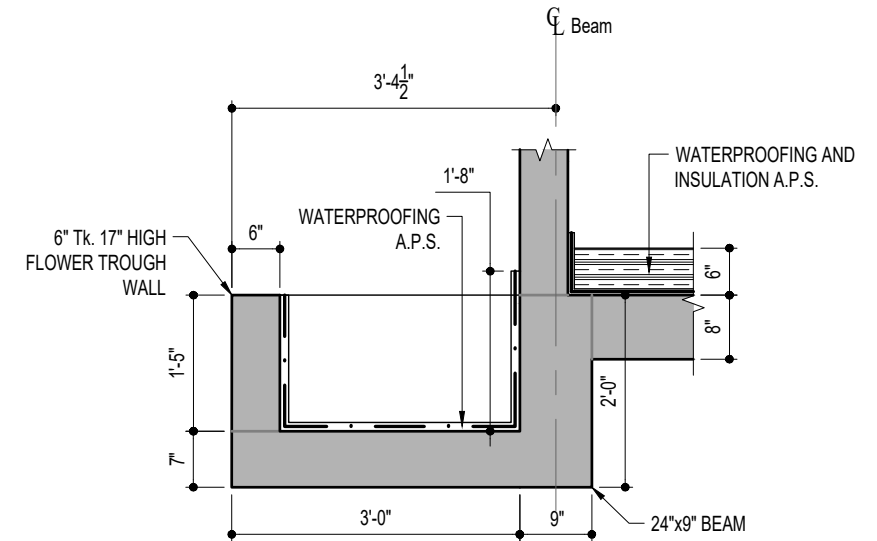

TYPICAL SECTION THROUGH FLOWER TROUGH

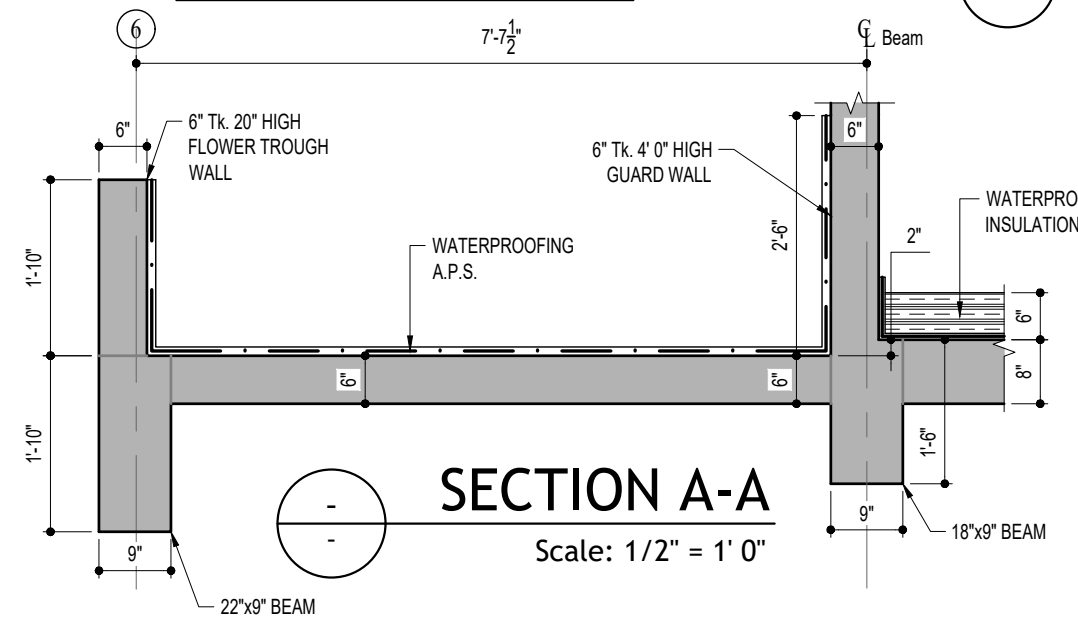

SECTION A-A
Scale: 1/2" = 1' 0"

NOTES :-


- FOR GENERAL NOTES REFER DRAWING 16003-S01
- FOR TYPICAL DETAILS REFER DRAWINGS 16003-S02.1, 16003-S02.2 AND 16003-S02.3.
- THIS DRAWING IS TO BE READ IN CONJUNCTION WITH ALL RELEVANT ARCHITECTURAL AND ENGINEERING DRAWINGS AND SPECIFICATIONS.
- NO CONCRETE IS TO BE POURED UNTIL THE REINFORCEMENT HAS BEEN INSPECTED AND APPROVED BY THE ENGINEER.
- WATER PROOFING AS SPECIFIED TO BE APPLIED ON ALL WATER RETAINING AND EXCLUDING SURFACES.
- SLAB OPENINGS' SIZE AND POSITION TO BE CHECKED WITH ARCHITECTURAL AND M&E DRAWINGS.
- FOR COLUMN SIZES REFER COLUMN LAYOUT(16003-Sxx)

UNLESS OTHERWISE SPECIFIED :-

- GUARD WALLS TO BE 4' 0" HIGH & 6" THICK.
- KERB HEIGHT AT THE TOILET DOORS TO ARCHITECT'S DETAIL.
- WALLS AROUND DUCTS TO BE AS PER ARCHITECTURAL DRAWINGS.
- ALL TOILETS/BALCONIES/TERRACE FLOORS SHALL BE SLOPED TO THE GULLIES AND SMOOTHLY FINISHED TO RECEIVE THE WATERPROOFING.
- BEAMS, COLUMNS AND WALLS ARE SYMMETRICAL ABOUT GRID/CENTRE LINES.

CONCRETE GRADE :-

- COLUMNS - AS PER COLUMN R/F DRAWING
- WALLS - AS PER WALL R/F DRAWING

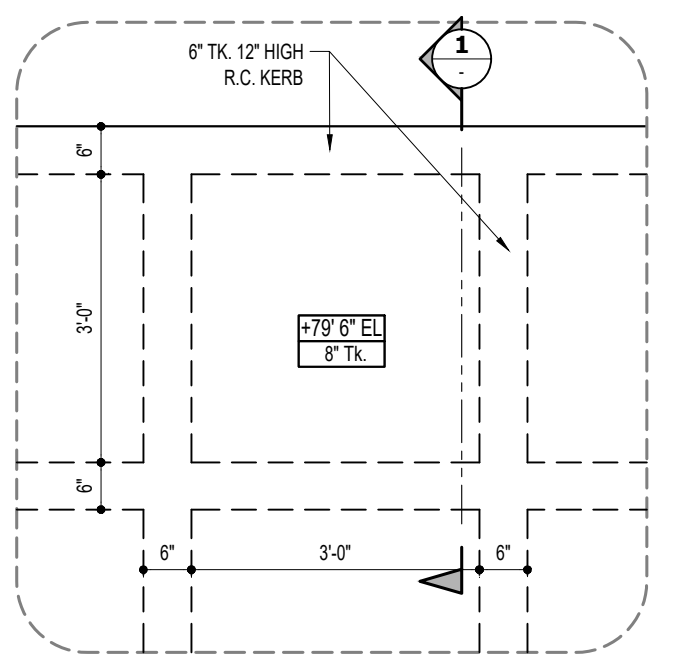

FILL DETAIL A
Scale: 1/2" = 1' 0"

CLIENT
PRIME LANDS RESIDENCIES (PVT) LTD,
NO. 75, D.S. SENANAYAKE MAWATHA
COLOMBO 08.

CONSULTANT
CIVIL AND STRUCTURAL ENGINEERING CONSULTANTS(PVT)LTD.
64, BARNES PLACE, COLOMBO-07,
SRI LANKA.
T +94 112 683 979 F +94 718 802 859
E mail - contact@csec.lk Web - www.csec.lk

KEY PLAN


REVISION	DESCRIPTION	DATE	BY

PROJECT
PROPOSED APARTMENT COMPLEX AT MATHEGODA - 03 BED ROOM APARTMENT


DESIGNED : Eng. Dilina Hettiarachchi
DRAWN : **Suman**
APPROVED : Eng. SHROMAL FERNANDO

DESIGN CHECKED : SH
DRAFTING CHECKED : TE
FILE NAME, PATH AND OTHER INFO.


DRAWING TITLE GENERAL ARRANGEMENT OF ROOF TERRACE		DATE 14-08-2017	SHEET No 17057-SXX	SCALE AS GIVEN	SHEET SIZE A2
PROJECT No 17057	REVISION R0	ISSUE 1			

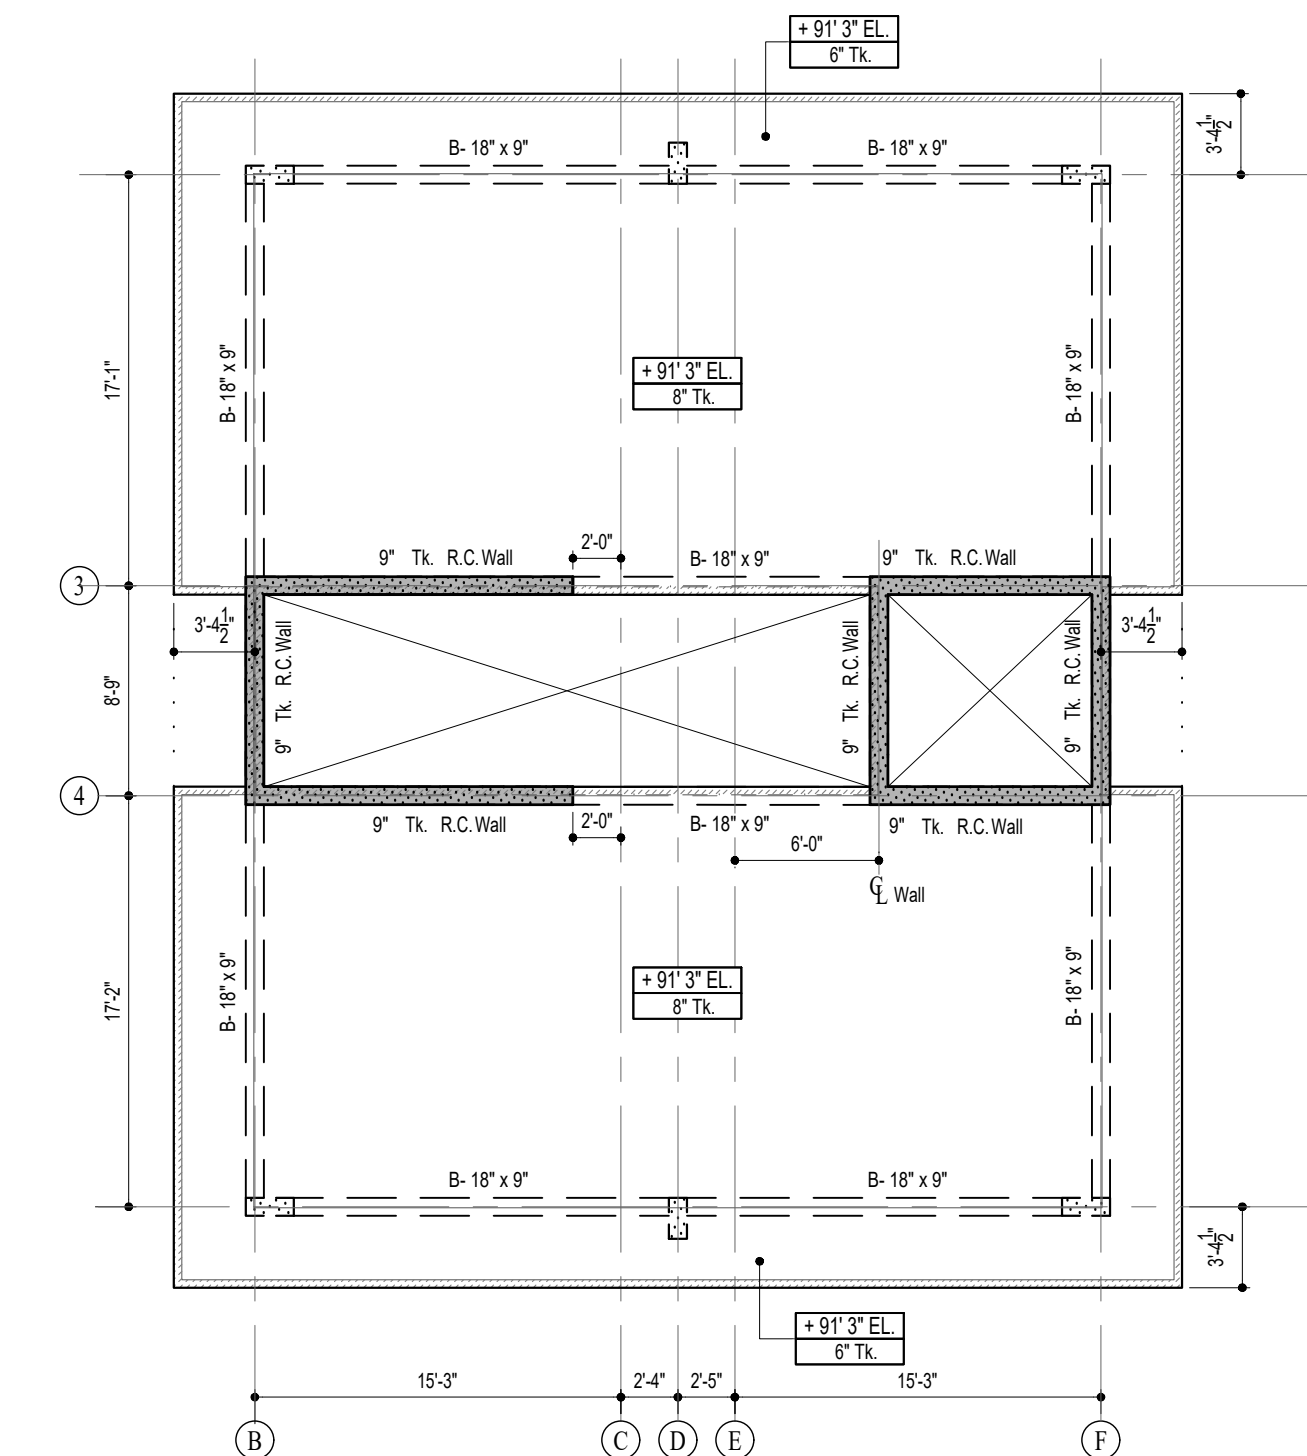


GENERAL ARRANGEMENT AT + 91' 3" EL.
Scale: 1/8" = 1' 0"

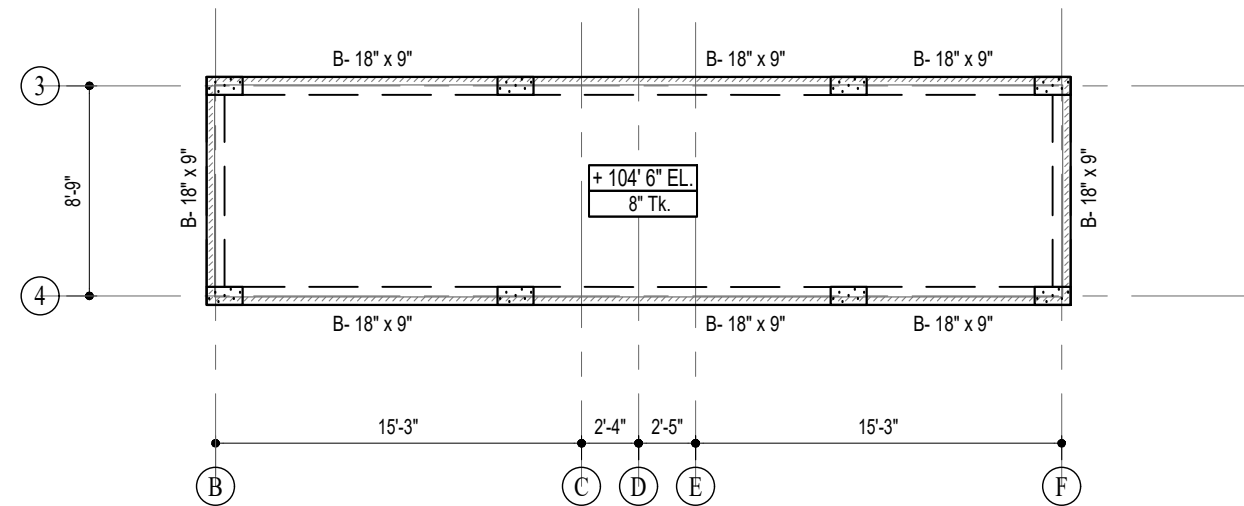

GENERAL ARRANGEMENT OF ROOF
Scale: 1/8" = 1' 0"

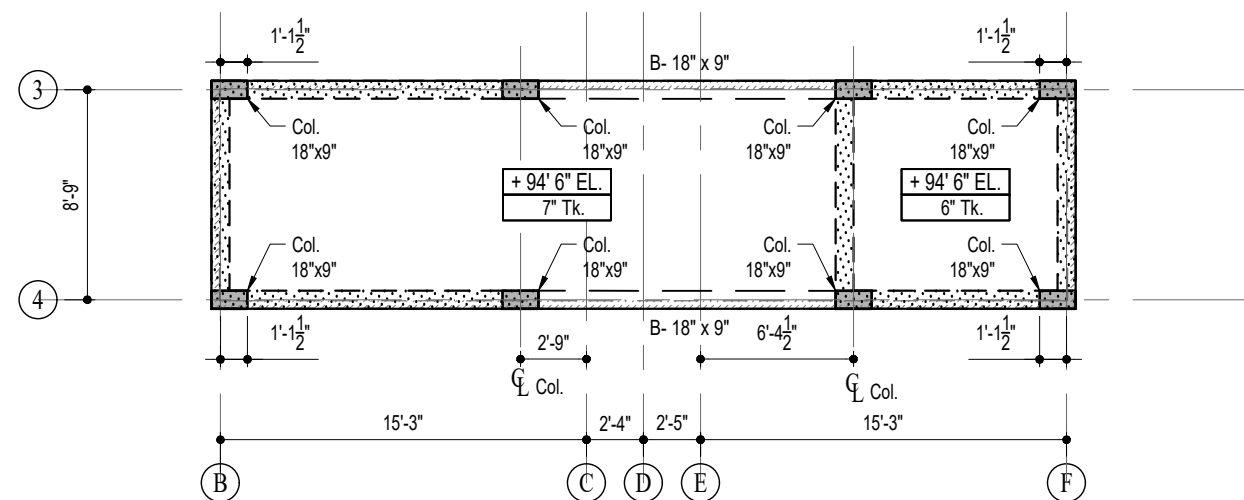

GENERAL ARRANGEMENT AT + 94' 6" EL. MACHINE ROOM & WATER TANK LEVEL
Scale: 1/8" = 1' 0"

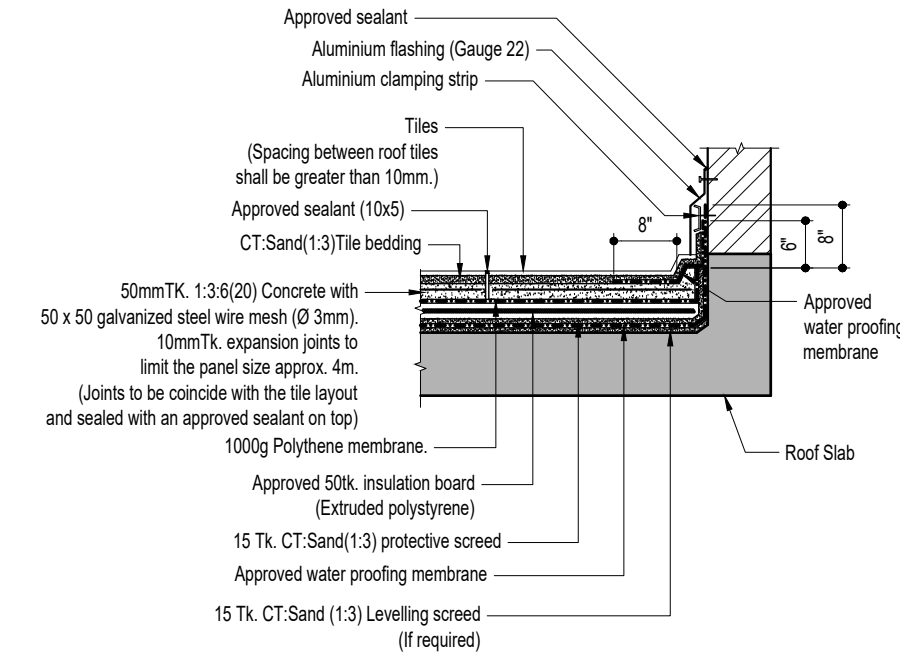

TYPICAL ROOF INSULATION & WATER PROOFING DETAIL
(SCALE: 1'-0" = 1/2")

NOTES :-

- FOR GENERAL NOTES REFER DRAWING 16003-S01
- FOR TYPICAL DETAILS REFER DRAWINGS 16003-S02.1, 16003-S02.2 AND 16003-S02.3.
- THIS DRAWING IS TO BE READ IN CONJUNCTION WITH ALL RELEVANT ARCHITECTURAL AND ENGINEERING DRAWINGS AND SPECIFICATIONS.
- NO CONCRETE IS TO BE POURED UNTIL THE REINFORCEMENT HAS BEEN INSPECTED AND APPROVED BY THE ENGINEER.
- WATER PROOFING AS SPECIFIED TO BE APPLIED ON ALL WATER RETAINING AND EXCLUDING SURFACES.
- SLAB OPENINGS' SIZE AND POSITION TO BE CHECKED WITH ARCHITECTURAL AND M&E DRAWINGS.
- FOR COLUMN SIZES REFER COLUMN LAYOUT(16003-Sxx)

UNLESS OTHERWISE SPECIFIED :-

- KERB HEIGHT AT THE TOILET DOORS TO ARCHITECT'S DETAIL.
- WALLS AROUND DUCTS TO BE AS PER ARCHITECTURAL DRAWINGS.
- ALL TOILETS/BALCONIES/TERRACE FLOORS SHALL BE SLOPED TO THE GULLIES AND SMOOTHLY FINISHED TO RECEIVE THE WATERPROOFING.
- BEAMS, COLUMNS AND WALLS ARE SYMMETRICAL ABOUT GRID/CENTRE LINES.

CONCRETE GRADE :-

- COLUMNS - AS PER COLUMN R/F DRAWING
- WALLS - AS PER WALL R/F DRAWING

CLIENT
PRIME LANDS RESIDENCIES (PVT) LTD,
NO. 75, D.S. SENANAYAKE MAWATHA
COLOMBO 08.

CONSULTANT
CSEC CIVIL AND STRUCTURAL ENGINEERING
CONSULTANTS(PVT)LTD.
64, BARNES PLACE, COLOMBO-07,
SRI LANKA.
T +94 112 683 979 F +94 718 802 859
E mail - contact@csec.lk Web - www.csec.lk

KEY PLAN

REVISION	DESCRIPTION	DATE	BY

PROJECT PROPOSED APARTMENT COMPLEX AT MATHEGODA - 03 BED ROOM APARTMENT	DESIGNED : Eng. Dilina Hettiarachchi DRAWN : Suman APPROVED : Eng. SHROMAL FERNANDO	DESIGN CHECKED : SH DRAFTING CHECKED : TE FILE NAME, PATH AND OTHER INFO.
--	--	---

DRAWING TITLE GENERAL ARRANGEMENT OF MACHINE ROOM, WATER TANK AND ROOF LEVEL	DATE 14-08-2017	SHEET No 17057-SXX	SCALE AS GIVEN	SHEET SIZE A2
PROJECT No 17057	REVISION R0	ISSUE 1		